



## EMC TEST REPORT For VCCI

Test Report No. : KES-EM-21T0505  
Date of Issue : Jun. 30, 2021  
Product name : NETWORK CAMERA  
Model/Type No. : XNO-C8083R  
Variant Model : -  
Applicant : Hanwha Techwin Co., Ltd.  
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,  
Gyeonggi-do, Republic of Korea  
Manufacturer : 1. HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.  
2. D-TECH CO.,LTD.  
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,  
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam  
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,  
Korea (Suwon Industrial Complex)  
Date of Receipt : Jun. 03, 2021  
Test date : Jun. 04, 2021 ~ Jun. 05, 2021  
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Min Seong, Kim  
EMC Test Engineer

Reviewed by

Dong-Hun, Jang  
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-EM-21T0505  
Page (2) of (43)

---

**REPORT REVISION HISTORY**

Date	Test Report No.	Revision History
Jun. 30, 2021	KES-EM-21T0505	Issued

***This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.***

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency .....	7
1.2	Variant Model Differences .....	7
1.3	Device Modifications .....	7
1.4	Equipment Under Test.....	7
1.5	Support Equipments .....	8
1.6	External I/O Cabling .....	9
1.7	EUT Operating Mode(s) .....	10
1.8	Configuration.....	11
1.9	Remarks when standards applied .....	12
1.10	Calibration Details of Equipment Used for Measurement .....	12
1.11	Test Facility .....	12
1.12	Laboratory Accreditations and Listings .....	12
2.0	Test Regulations.....	13
2.1	Conducted Emissions Mains Power Ports.....	15
2.2	Conducted Emissions at Telecommunication Ports.....	16
2.3	Radiated Electric Field Emissions(Below 1 GHz) .....	17
2.4	Radiated Electric Field Emissions(Above 1 GHz) .....	18
APPENDIX A – TEST DATA.....		19
Conducted Emissions at Mains Power Ports.....		19
Conducted Emissions at Telecommunication Ports .....		21
Radiated Electric Field Emissions(Below 1 GHz) .....		23
Radiated Electric Field Emissions(Above 1 GHz).....		25
Test Setup Photos and Configuration .....		27
Conducted Emissions at Mains Power Ports.....		27
Conducted Emissions at Telecommunication Ports .....		28
Radiated Electric Field Emissions(Below 1 GHz) .....		30
Radiated Electric Field Emissions(Above 1 GHz).....		32
EUT External Photographs .....		34
EUT Internal Photographs .....		35



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-EM-21T0505  
Page (4) of (43)

## 1.0 General Product Description

### Main Specifications of EUT are:

Video	
Imaging Device	1/1.8" progressive CMOS
Resolution	3328x1872, 3072x1728, 2592x1944, 2688x1520, 1920x1080, 1600x1200, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240
Max. Framerate	H.265/H.264: Max. 30fps/25fps(60Hz/50Hz) MJPEG: Max. 15fps/12fps(60Hz/50Hz)
NETD	None
Pixel Size	None
Min. Illumination	Color: 0.04Lux(F1.3, 1/30sec, 30IRE) B/W: 0.004Lux(F1.3, 1/30sec, 30IRE), 0Lux(IR LED on)
Video Out	USB: Micro USB Type B, 1280x720 for installation
Video Transmission Distance	None
Lens	
Focal Length (Zoom Ratio)	4.4~9.3mm(2.1x) motorized varifocal
Max. Aperture Ratio	F1.3
Angular Field of View	H : 112.1°(Wide)~47.5°(Tele) V : 58.0°(Wide)~26.6°(Tele) D : 137.5°(Wide)~54.6°(Tele)
Min. Object Distance	0.5m(1.64ft)
Focus Control	Simple focus, Manual
Lens Type	P-iris(IR corrected)
Mount Type	None
Optional Lens	None
Pan / Tilt / Rotate	
Pan / Tilt / Rotate Range	None
Pan Range	None
Pan Speed	None
Tilt Range	None
Tilt Speed	None
Rotate Range	None
Sequence	None
Preset Accuracy	None
Operational	
Camera Title	Displayed up to 85 characters
Direction Indicator	None
Day & Night	Auto(ICR)
Backlight Compensation	BLC, HLC, WDR, SDR
Wide Dynamic Range	extremeWDR (120dB)
Digital Noise Reduction	WiseNRⅡ(Based on AI engine), SSNRV
Digital Image Stabilization	Support(built-in gyro sensor)
Defog	Support
Motion Detection	8ea, 8point Polygonal zones
Privacy Masking	32ea, Quadrangle zones - Color : Gray, Green, Red, Blue, Black, White - Mosaic

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



# KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-EM-21T0505  
Page (5) of (43)

Gain Control	Support
White Balance	ATW / Narrow ATW / AWC / Manual / Indoor / Outdoor
LDC	Support (Fill/stretch mode)
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (2~1/12,000sec) Auto prefer shutter control(Based on AI engine)
Digital PTZ	Support
Video Rotation	Flip, Mirror, Hallway view(90°/270°)
Analytics	- Analytics events based on AI engine(NPU) : Object detection (Person/Face/Vehicle(car/truck/bus/bicycle/motorcycle)/Licence plate), IVA (Virtual line/Area, Enter/Exit, Loitering, direction, intrusion) - Analytics events : Defocus detection, Motion detection, Tampering, Fog detection, Audio detection, Sound classification, Shock detection, Appear/Disappear
Business Intelligence	Based on AI engine(NPU) : People counting, Queue management, Heatmap
Serial Interface	None
Alarm I/O	2 configurable I/O ports
Alarm Triggers	Analytics, Network disconnect, Alarm input, App event, Time schedule
Alarm Events	When alarm trigger occurred - File upload(image) : e-mail/FTP - Notification : e-mail - Recording : SD/SDHC/SDXC or NAS recording at event triggers - Alarm output - Handover(PTZ preset, Send message by HTTP/HTTPS/TCP) - Audio clip playback - PTZ preset
Audio In	Selectable(mic in/line in) Supply voltage: 2.5VDC(4mA), Input impedance: 2K Ohm
Audio Out	Line out, Max.output level: 1Vrms
IR Viewable Length	WiseIR 40m(131.23ft)
IR Illuminator (Optional)	None
Water Removal	None
Auto Tracking	None
Coaxial Protocol	None
Color Palettes	None
<b>Radiometry</b>	
Temperature Detect Range	None
Temperature Accuracy	None
Temperature Detection	None
Additional	None
<b>Network</b>	
Ethernet	Metal shielded RJ-45(10/100BASE-T)
Video Compression	H.265/H.264: Main/High, MJPEG
Audio Compression	G.711 u-law /G.726 Selectable G.726(ADPCM) 8KHz, G.711 8KHz G.726: 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC: 48Kbps at 16KHz
Smart Codec	Manual(Sea area), WiseStream II, WiseStream III(Based on AI engine)
Video Quality Adjustment	H.264/H.265: Target bitrate level control MJPEG: Target bitrate level control
Bitrate Control	H.264/H.265: CBR or VBR MJPEG: VBR
Streaming	Unicast(20 users) / Multicast Multiple streaming(Up to 10 profiles, 3 virtual channel support)
Protocol	IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP,RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, UPnP, Bonjour, LLDP, SRTTP (TCP, UDP Unicast)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-EM-21T0505  
Page (6) of (43)

Security	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access log 802.1X Authentication(EAP-TLS, EAP-LEAP, EAP-PEAP MSCHAPv2) Device Certificate(Hanwha Techwin Root CA, pre-installed) Secure by default certificate HTPM (Hanwha Trusted platform module) Secure OS/Boot/Storage, Verify firmware forgery
Application Programming Interface	ONVIF Profile S/G/T SUNAPI(HTTP API) Wisenet open platform
<b>General</b>	
Webpage Language	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish, Portuguese, Czech, Polish, Turkish, Dutch, Greek, Hungarian
Web Viewer	None
Edge Storage	Micro SD/SDHC/SDXC 1slot 512GB
Memory	4GB RAM, 512MB Flash
<b>Environmental &amp; Electrical</b>	
Operating Temperature / Humidity	-40°C~+55°C(-40°F ~ +131°F) * Maximum temperature : +60°C (intermittent) NEMA TS-2 : 74°C * Start up should be done at above -20°C 0~95%RH(non-condensing)(TBD) Humidity control /w GORE vent
Storage Temperature / Humidity	-50°C ~ +60°C(-58°F ~ +140°F) / Less than 90% RH
Certification	IP66/IP67/NEMA4X, IK10
Input Voltage	PoE(IEEE802.3af, Class3), 12VDC
Power Consumption	PoE: Max 12.95W, typical 11.2W 12VDC: Max 13.2W, typical 10.8W
<b>Mechanical</b>	
Color / Material	White / Aluminum + PC Hard-coated window
RAL Code	RAL9003
Product Dimensions / Weight	Ø93.4x276.6mm(Ø3.68x10.89"), 1500g(3.30 lb) (TBD)
Compatible Conduit hole / Gangbox	single, double, 4" octagon, 4" square
Hanging Mount (Dome)	None
Skin Cover (Dome)	None
Weather Cap (Dome)	None
Power Module	None
Backbox	include
<b>DORI (EN62676-4 standard)</b>	
Detect (25PPM/ 8PPF)	Wide: 44.8m(147.02ft) / Tele: 151.3m(496.29ft)
Observe (63PPM/ 19PPF)	Wide: 17.9m(58.81ft) / Tele: 60.5m(198.52ft)
Recognize (125PPM/ 38PPF)	Wide: 9.0m(29.4ft) / Tele: 30.3m(99.26ft)
Identify (250PPM/ 76PPF)	Wide: 4.5m(14.7ft) / Tele: 15.1m(49.63ft)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## 1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

☒ AC 100 V, 60 Hz      ☒ PoE

## 1.2 Variant Model Differences

Not applicable

## 1.3 Device Modifications

Not applicable

## 1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	XNO-C8083R	-	HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.	EUT

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-EM-21T0505  
Page (8) of (43)

## 1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
AC / DC Adapter	2ACB022F	-	Channel Well Technology(Guangzhou) Co., Ltd.	-
PoE Injector	PT-PSE109GBRO-AH	PT1850221049	Dongguan PROCET Network Technology Co.,Ltd	-
Notebook	P89F	-	Wistron Infocom (Chengdu) Company Limited	-
Notebook Adapter	LA240PM190	-	LITE-ON TECHNOLOGY (CHANGZHOU)CO., LTD.	-
Speaker	BR1000A Cuve Black 2	-	DONGGUAN EDIFIER TECHNOLOGY Co., Ltd	-
MIC	MP1000	-	-	-
Alarm	SIP-1201DD D0	-	SAMSUNG TECHWIN CO., LTD.	-
Button Alarm	-	-	-	-
Micro SD Card	-	-	SanDisk	16 GB
Smart Phone	SM-N950N	R39JB0C3FB	SAMSUNG	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr





## 1.6 External I/O Cabling

### ■ DC Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (EUT)	RJ-45	Notebook	RJ-45	3.0	U
	Audio Out	Speaker	Line-Out (3.5 mm)	1.4	U
	Audio In	MIC	XLR	1.4	U
	Alarm Out	Alarm	Alarm In	3.0	U
	Alarm In	Button Alarm	Alarm Out	3.0	U
	SLOT	Micro SD Card	SLOT	-	-
Notebook	3.5 mm	Smart Phone	3.5 mm	1.0	U

\* Unshielded=U, Shielded=S

### ■ PoE Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (EUT)	RJ-45 (PoE)	PoE Injector	RJ-45 (PoE)	3.0	U
	Audio Out	Speaker	Line-Out (3.5 mm)	1.4	U
	Audio In	MIC	XLR	1.4	U
	Alarm Out	Alarm	Alarm In	3.0	U
	Alarm In	Button Alarm	Alarm Out	3.0	U
	SLOT	Micro SD Card	SLOT	-	-
Notebook	RJ-45 (LAN)	PoE Injector	RJ-45 (LAN)	2.0	U
	3.5 mm	Smart Phone	3.5 mm	1.0	U

\* Unshielded=U, Shielded=S



## 1.7 EUT Operating Mode(s)


Test Mode	operating
Operation	Monitoring EUT Using Web Viewer, Ping Test

EUT Test operating S/W		
Name	Version	Manufacture Company
Web Viewer	-	-


## 1.8 Configuration

■ AC Main  
 □ DC Main

### ■ DC Mode

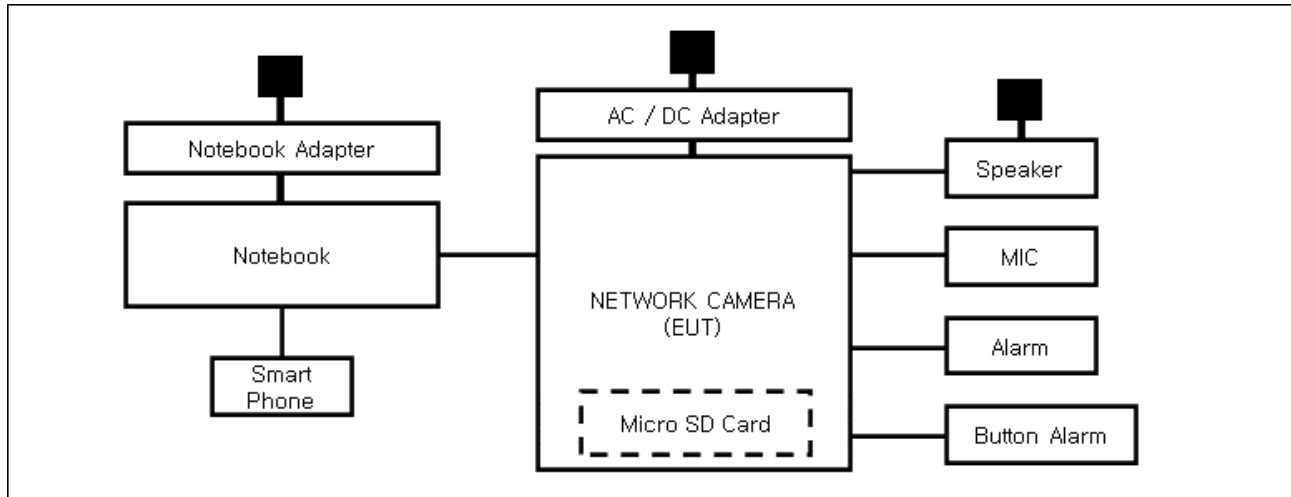

### ■ PoE Mode

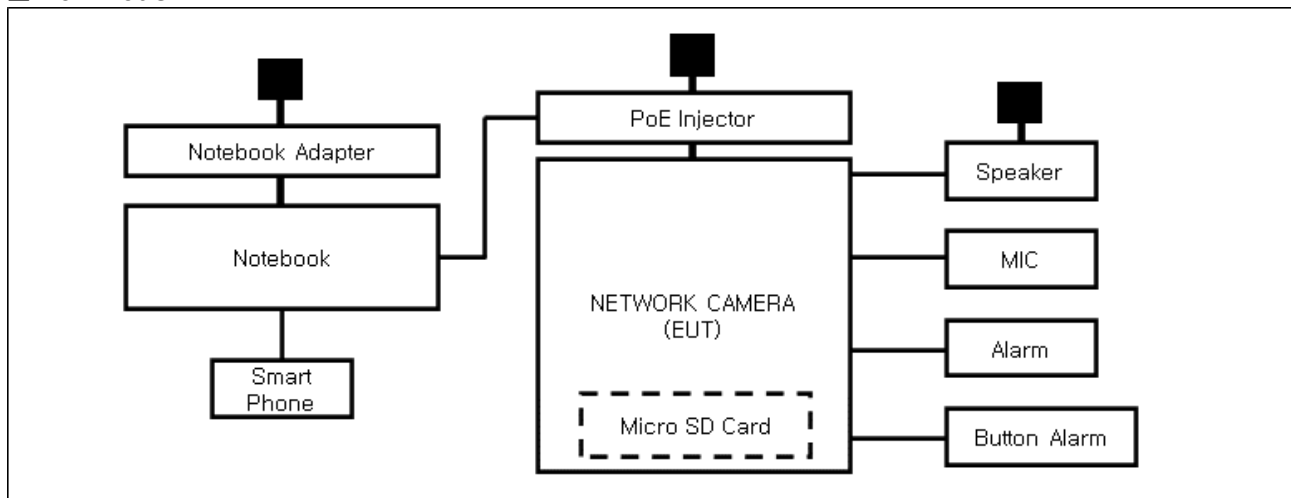

## 1.9 Remarks when standards applied

The USB port is for administrator use and is excluded from testing.







## 1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

## 1.11 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4:2014 and CISPR 16-1-4:2019

## 1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber , and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber, 10 m Open Area and Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298-1
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-20056, C-20036, T-20040, G-20057
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber , 10 m Open Area and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004



## 2.0 Test Regulations

The emissions tests were performed according to following regulations:

☐ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1  
☐ Class A

☐ Group 2  
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 61547 :2009

☐ EN 55032:2015

☐ Class A

☐ Class B

☐ EN 55024:2010 +A1:2015

☐ EN 50130-4:2011 +A1:2014

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013



**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-EM-21T0505  
Page (14) of (43)

- 
- |                                                               |                                             |                                  |
|---------------------------------------------------------------|---------------------------------------------|----------------------------------|
| <input checked="" type="checkbox"/> <b>VCCI-CISPR 32:2016</b> | <input checked="" type="checkbox"/> Class A | <input type="checkbox"/> Class B |
| <input type="checkbox"/> <b>AS/NZS CISPR32:2015</b>           | <input type="checkbox"/> Class A            | <input type="checkbox"/> Class B |
| <input type="checkbox"/> <b>47 CFR Part 15, Subpart B</b>     |                                             |                                  |
| <input type="checkbox"/> CISPR 22:2009 +A1:2010               | <input type="checkbox"/> Class A            | <input type="checkbox"/> Class B |
| <input type="checkbox"/> ANSI C63.4-2009                      |                                             |                                  |
| <input type="checkbox"/> <b>IC Regulation ICES-003 : 2016</b> |                                             |                                  |
| <input type="checkbox"/> CAN/CSA CISPR 22-10                  | <input type="checkbox"/> Class A            | <input type="checkbox"/> Class B |
| <input type="checkbox"/> ANSI C63.4-2014                      |                                             |                                  |
| <br>                                                          |                                             |                                  |
| <input type="checkbox"/> <b>RE- Directive 2014/53/EU</b>      |                                             |                                  |
| <input type="checkbox"/> EN 301 489-1 V1.9.2                  |                                             |                                  |
| <input type="checkbox"/> Equipment for fixed use              |                                             |                                  |
| <input type="checkbox"/> Equipment for vehicular use          |                                             |                                  |
| <input type="checkbox"/> Equipment for portable use           |                                             |                                  |
| <input type="checkbox"/> EN 301 489-3 V1.6.1                  |                                             |                                  |
| <input type="checkbox"/> EN 301 489-17 V2.2.1                 |                                             |                                  |
| <input type="checkbox"/> EN 60945:2002                        |                                             |                                  |

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## 2.1 Conducted Emissions Mains Power Ports

### Test Date

Jun. 04, 2021

### Test Location

Electro wave Shieldroom #6

### Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EMC32	R & S	9.12.00	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESR3	R & S	101783	01, 15, 2022
<input checked="" type="checkbox"/>	LISN	ENV216	R & S	101787	12, 29, 2021
<input checked="" type="checkbox"/>	LISN	ESH2-Z5	R & S	100450	12, 29, 2021
<input checked="" type="checkbox"/>	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 29, 2021

### Test Conditions

Temperature: (24,5 ± 0,1) °C

Relative Humidity: (44,5 ± 0,1) % R.H.

### Frequency Range of Measurement

150 kHz to 30 MHz

### Instrument Settings

IF Band Width: 9 kHz

### Test Results

The requirements are:

- ☒ PASS  
☐ NOT PASS  
☐ NOT APPLICABLE

### Remarks

See Appendix A for test data.



## 2.2 Conducted Emissions at Telecommunication Ports

### Test Date

Jun. 04, 2021

### Test Location

Electro wave Shieldroom #6

### Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EMC32	R & S	9.12.00	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESR3	R & S	101783	01, 15, 2022
<input checked="" type="checkbox"/>	LISN	ENV216	R & S	101787	12, 29, 2021
<input checked="" type="checkbox"/>	LISN	ESH2-Z5	R & S	100450	12, 29, 2021
<input checked="" type="checkbox"/>	PULSE LIMITER	ESH3-Z2	R & S	101915	12, 29, 2021
<input checked="" type="checkbox"/>	8-WIRE ISN CAT3,5	ENY81	R & S	100174	12, 30, 2021
<input type="checkbox"/>	8-WIRE ISN CAT6	ENY81-CAT6	R & S	101665	12, 30, 2021
<input type="checkbox"/>	CDN	CDNS502A	TESEQ	40431	12, 29, 2021

### Test Conditions

Temperature: (24,4 ± 0,1) °C  
Relative Humidity: (45,0 ± 0,2) % R.H.

### Frequency Range of Measurement

150 kHz to 30 MHz

### Instrument Settings

IF Band Width: 9 kHz

### Test Results

The requirements are:

- ☒ PASS  
☐ NOT PASS  
☐ NOT APPLICABLE

### Remarks

See Appendix A for test data.





## 2.3 Radiated Electric Field Emissions(Below 1 GHz)

### Test Date

Jun. 04, 2021

### Test Location

☐ OPEN AREA TEST SITE #2 ☒ SEMI ANECHOIC CHAMBER #4(10m)

### Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESU26	R & S	100551	04, 01, 2022
<input checked="" type="checkbox"/>	AMPLIFIER	SCU 01	R & S	100603	11, 25, 2021
<input checked="" type="checkbox"/>	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	12, 08, 2022
<input checked="" type="checkbox"/>	ATTENUATOR	8491A	HP	32173	03, 10, 2022

### Test Conditions

Temperature: (23,6 ± 0,2) °C  
Relative Humidity: (46,4 ± 0,4) % R.H.

### Frequency Range of Measurement

30 MHz to 1 GHz

### Instrument Settings

IF Band Width: 120 kHz

### Test Results

The requirements are:

☒ PASS  
☐ NOT PASS  
☐ NOT APPLICABLE

### Remarks

See Appendix A for test data.



## 2.4 Radiated Electric Field Emissions(Above 1 GHz)

### Test Date

Jun. 05, 2021

### Test Location

SEMI ANECHOIC CHAMBER #3

### Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESR7	R & S	101190	08, 05, 2021
<input checked="" type="checkbox"/>	PREAMPLIFIER	8449B	AGILENT	3008A01967	04, 07, 2022
<input type="checkbox"/>	ATTENUATOR	8491A	HP	35496	03, 10, 2022
<input checked="" type="checkbox"/>	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	03, 11, 2022

### Test Conditions

Temperature: (24,3 ± 0,2) °C

Relative Humidity: (45,5 ± 0,4) % R.H.

### Frequency Range of Measurement

1 GHz to 6 GHz

### Instrument Settings

IF Band Width: 1 MHz

### Test Results

The requirements are:

- ☒ PASS  
☐ NOT PASS  
☐ NOT APPLICABLE

### Remarks

See Appendix A for test data.



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-EM-21T0505  
Page (19) of (43)

## APPENDIX A – TEST DATA


### Conducted Emissions at Mains Power Ports

■ DC Mode

HOT LINE

### Common Information

Test Description:	Conducted Emission
Model No.:	XNO-C8083R
Phase:	H
Mode:	DC
Operator Name:	KES

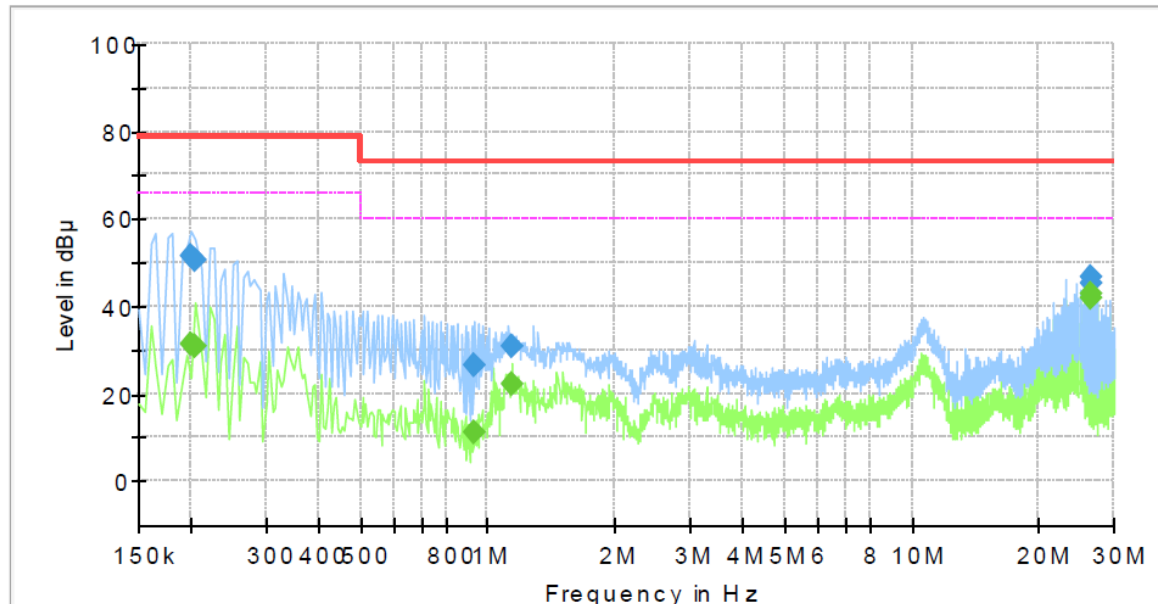

### Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.200000	---	31.07	66.00	34.93	1000.0	9.000	L1	19.4
0.200000	51.58	---	79.00	27.42	1000.0	9.000	L1	19.4
0.205000	---	30.59	66.00	35.41	1000.0	9.000	L1	19.4
0.205000	50.71	---	79.00	28.29	1000.0	9.000	L1	19.4
0.930000	---	11.19	60.00	48.81	1000.0	9.000	L1	20.1
0.930000	26.42	---	73.00	46.58	1000.0	9.000	L1	20.1
1.140000	---	22.39	60.00	37.61	1000.0	9.000	L1	20.1
1.140000	30.60	---	73.00	42.40	1000.0	9.000	L1	20.1
26.485000	---	41.76	60.00	18.24	1000.0	9.000	L1	20.2
26.485000	45.26	---	73.00	27.74	1000.0	9.000	L1	20.2
26.610000	---	42.96	60.00	17.04	1000.0	9.000	L1	20.2
26.610000	46.47	---	73.00	26.53	1000.0	9.000	L1	20.2

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-EM-21T0505  
Page (20) of (43)

### NEUTRAL LINE

## Common Information

Test Description: Conducted Emission  
Model No.: XNO-C8083R  
Phase: N  
Mode: DC  
Operator Name: KES

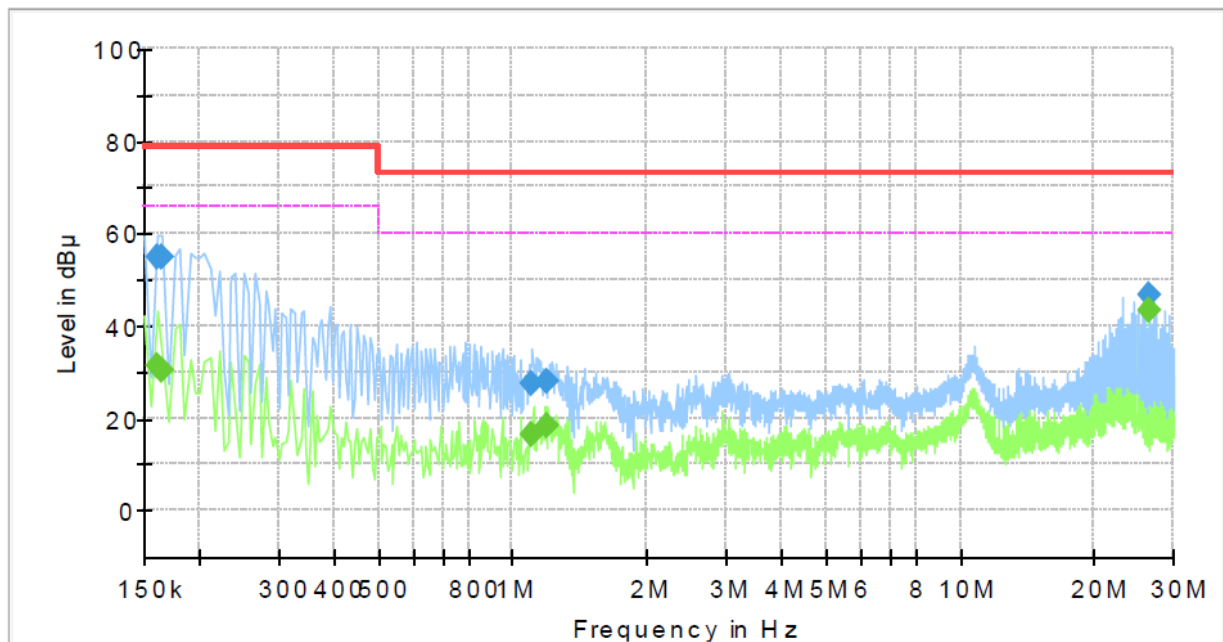

## Final\_Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.160000	---	31.25	66.00	34.75	1000.0	9.000	N	19.4
0.160000	54.67	---	79.00	24.33	1000.0	9.000	N	19.4
0.165000	---	30.42	66.00	35.58	1000.0	9.000	N	19.4
0.165000	54.77	---	79.00	24.23	1000.0	9.000	N	19.4
1.105000	---	16.48	60.00	43.52	1000.0	9.000	N	20.1
1.105000	27.62	---	73.00	45.38	1000.0	9.000	N	20.1
1.200000	---	18.29	60.00	41.71	1000.0	9.000	N	20.1
1.200000	27.82	---	73.00	45.18	1000.0	9.000	N	20.1
26.610000	---	43.40	60.00	16.60	1000.0	9.000	N	20.3
26.610000	46.86	---	73.00	26.14	1000.0	9.000	N	20.3

### ◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-EM-21T0505  
Page (21) of (43)


## Conducted Emissions at Telecommunication Ports

■ DC Mode

[100 Mbps]

### Common Information

Test Description: Telecommunication Emission  
Model No.: XNO-C8083R  
Mode : DC  
Speed : 100 Mbps  
Operator Name: KES

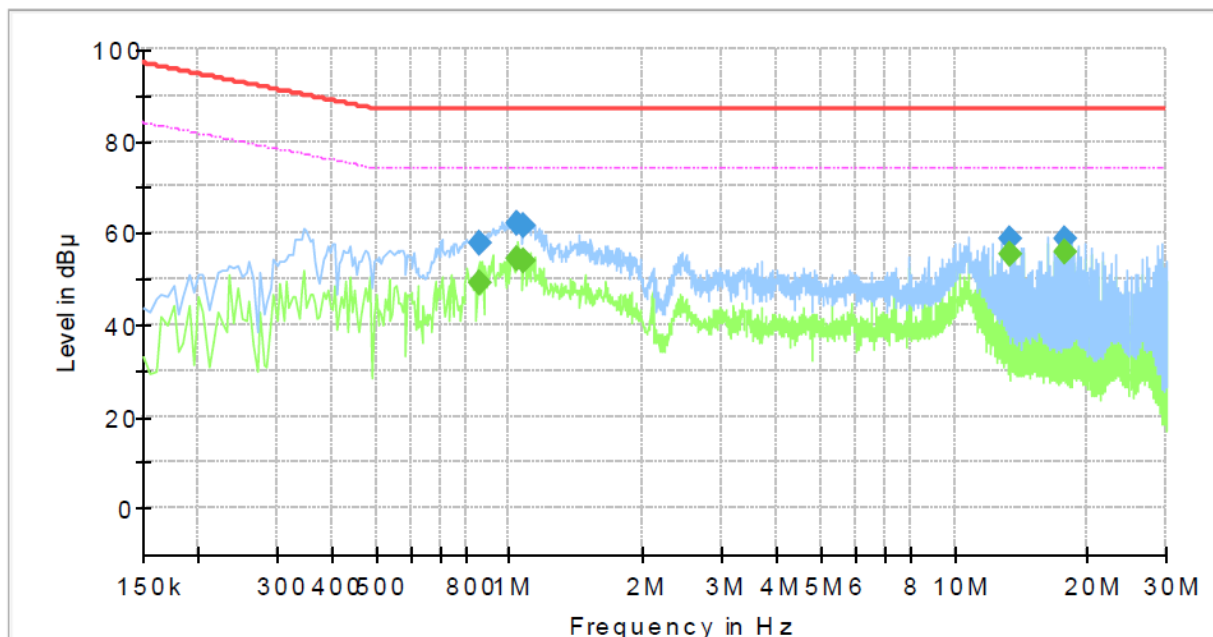

### Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.855000	---	49.29	74.00	24.71	1000.0	9.000	Single Line	20.0
0.855000	57.61	---	87.00	29.39	1000.0	9.000	Single Line	20.0
1.045000	---	54.35	74.00	19.65	1000.0	9.000	Single Line	20.0
1.045000	61.98	---	87.00	25.02	1000.0	9.000	Single Line	20.0
1.075000	---	53.91	74.00	20.09	1000.0	9.000	Single Line	20.0
1.075000	61.59	---	87.00	25.41	1000.0	9.000	Single Line	20.0
13.420000	---	55.24	74.00	18.76	1000.0	9.000	Single Line	19.7
13.420000	58.59	---	87.00	28.41	1000.0	9.000	Single Line	19.7
17.695000	---	55.69	74.00	18.31	1000.0	9.000	Single Line	19.8
17.695000	58.87	---	87.00	28.13	1000.0	9.000	Single Line	19.8


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

■ PoE Mode

**[100 Mbps]**

**Common Information**

Test Description:	Telecommunication Emission
Model No.:	XNO-C8083R
Mode :	PoE
Speed :	100 Mbps
Operator Name:	KES

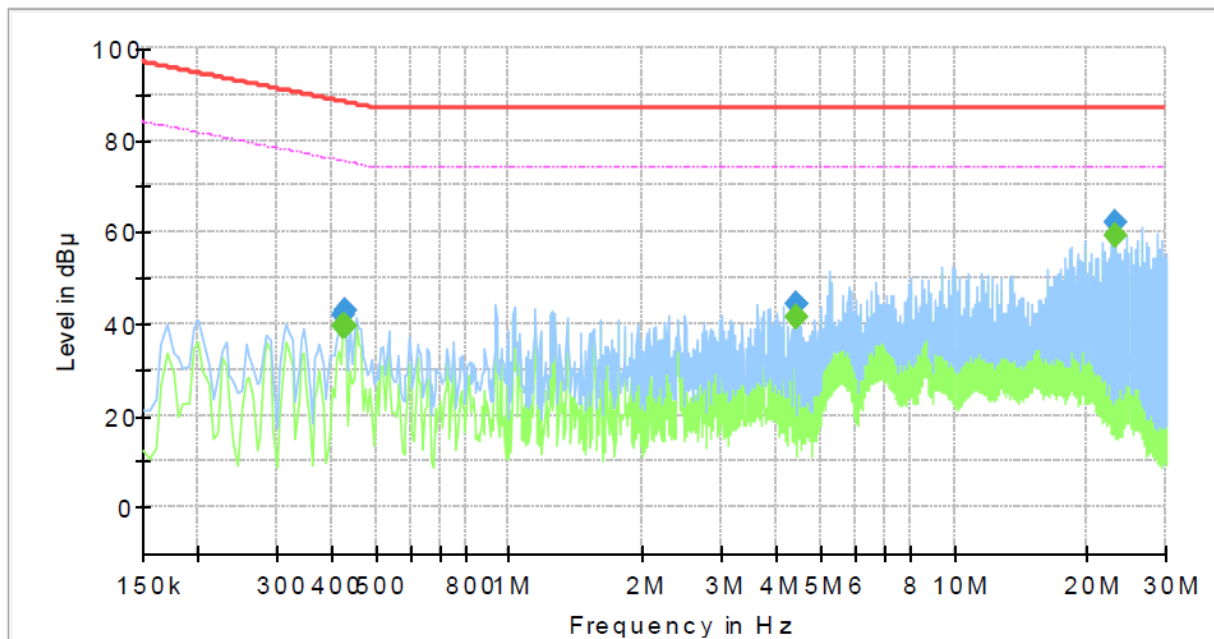

**Final Result**

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.425000	---	39.30	75.35	36.05	1000.0	9.000	Single Line	19.8
0.425000	42.09	---	88.35	46.26	1000.0	9.000	Single Line	19.8
0.430000	---	39.56	75.25	35.69	1000.0	9.000	Single Line	19.8
0.430000	42.73	---	88.25	45.52	1000.0	9.000	Single Line	19.8
4.410000	---	41.59	74.00	32.41	1000.0	9.000	Single Line	19.6
4.410000	44.11	---	87.00	42.89	1000.0	9.000	Single Line	19.6
23.130000	---	59.23	74.00	14.77	1000.0	9.000	Single Line	20.1
23.130000	61.88	---	87.00	25.12	1000.0	9.000	Single Line	20.1

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))




## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-EM-21T0505  
Page (23) of (43)

## Radiated Electric Field Emissions(Below 1 GHz)

### ■ DC Mode

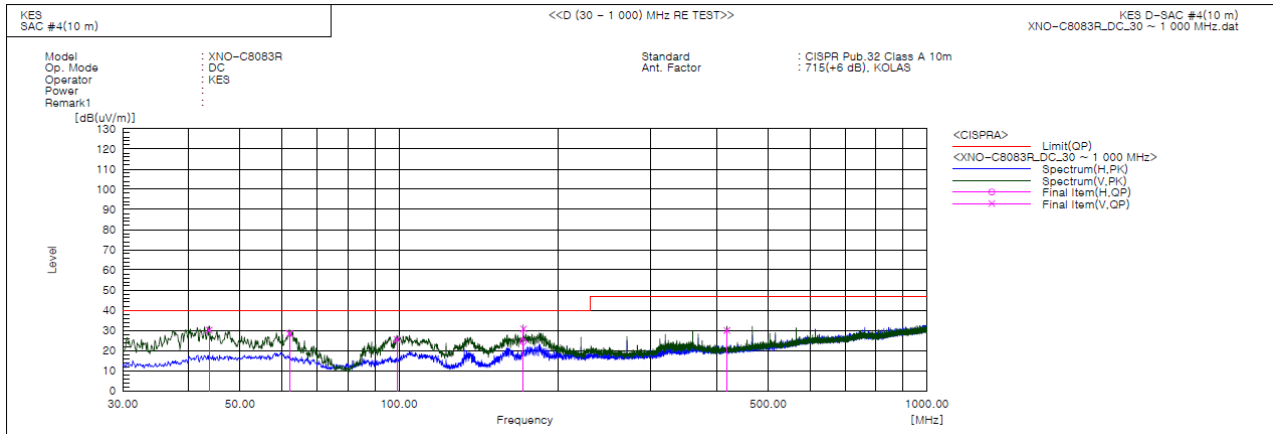

### Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	43.701	V	51.8	-21.6	30.2	40.0	9.8	100.0	190.0	
2	62.010	V	50.8	-22.4	28.4	40.0	11.6	132.0	81.0	
3	99.113	V	48.2	-22.6	25.6	40.0	14.4	100.0	213.0	
4	171.984	H	48.4	-24.0	24.4	40.0	15.6	340.0	98.0	
5	172.112	V	54.7	-24.0	30.7	40.0	9.3	113.0	12.0	
6	417.758	V	43.9	-13.9	30.0	47.0	17.0	100.0	194.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr






## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-EM-21T0505  
Page (24) of (43)

### ■ PoE Mode

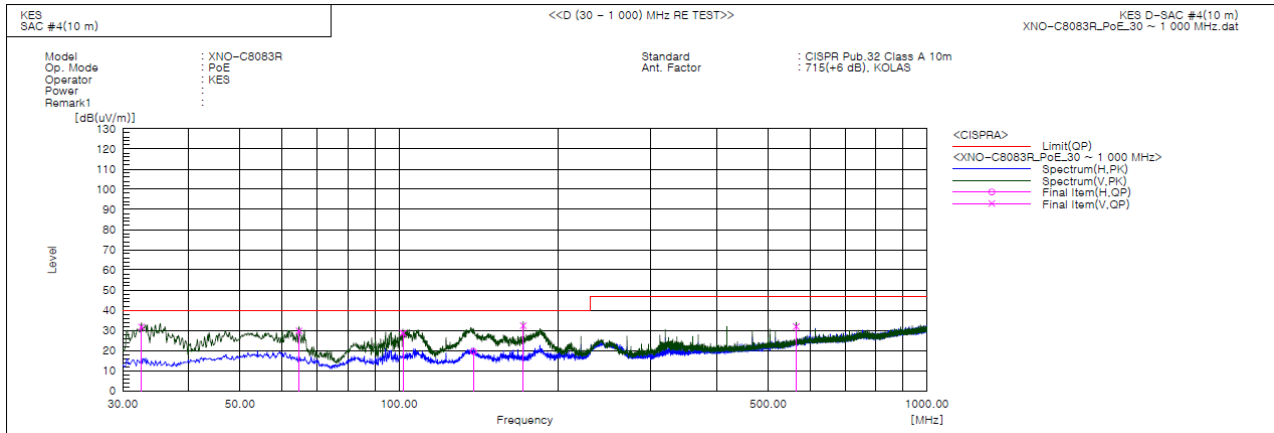

### Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	32.546	V	56.8	-25.1	31.7	40.0	8.3	100.0	288.0	
2	64.678	V	53.0	-23.2	29.8	40.0	10.2	113.0	85.0	
3	101.780	V	51.2	-22.5	28.7	40.0	11.3	100.0	179.0	
4	138.398	H	44.9	-25.4	19.5	40.0	20.5	389.0	27.0	
5	171.984	V	56.4	-24.0	32.4	40.0	7.6	100.0	228.0	
6	565.198	V	41.6	-9.7	31.9	47.0	15.1	132.0	171.0	

### ◆ Calculation

Corrected Amplitude [dBuV] = Amplitude[dBuV] + Correction Factor [dB]

Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr






## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-EM-21T0505  
Page (25) of (43)

## Radiated Electric Field Emissions(Above 1 GHz)

### ■ DC Mode

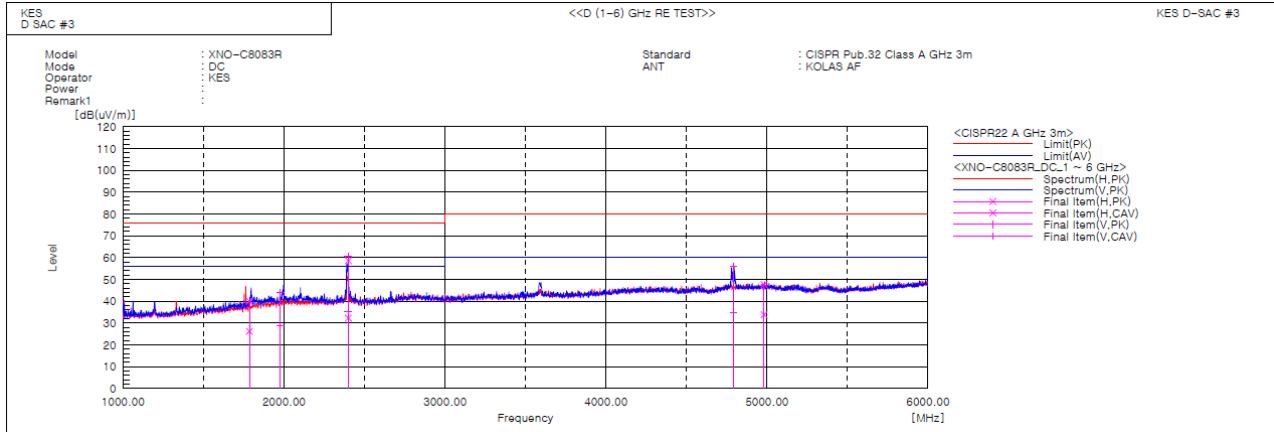

### Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1785.375	H	43.1	29.3	-3.1	40.0	26.2	76.0	56.0	36.0	29.8	100.0	219.8	
2	1977.934	V	45.1	30.0	-1.0	44.1	29.0	76.0	56.0	31.9	27.0	100.0	15.9	
3	2397.748	V	60.5	35.0	0.2	60.7	35.2	76.0	56.0	15.3	20.8	100.0	137.8	
4	2399.839	H	58.4	32.1	0.2	58.6	32.3	76.0	56.0	17.4	23.7	100.0	343.3	
5	4789.821	V	47.4	26.5	8.5	55.9	35.0	80.0	60.0	24.1	25.0	100.0	2.4	
6	4982.301	H	38.7	24.9	9.0	47.7	33.9	80.0	60.0	32.3	26.1	100.0	156.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr




## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:  
KES-EM-21T0505  
Page (26) of (43)

### PoE Mode

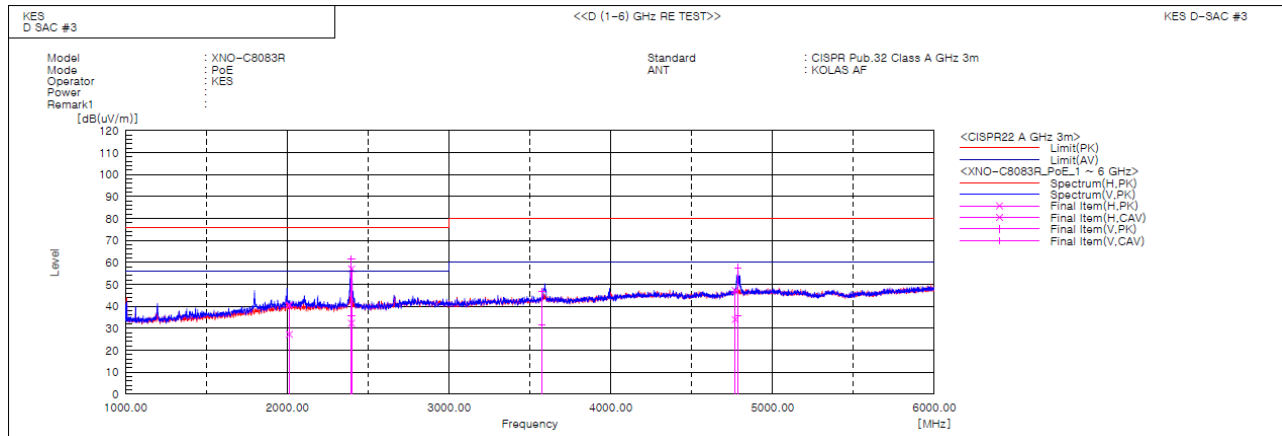

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	2012.936	H	41.4	28.1	-0.8	40.6	27.3	76.0	56.0	35.4	28.7	100.0	284.9	
2	2396.080	V	61.4	35.4	0.2	61.6	35.6	76.0	56.0	14.4	20.4	100.0	152.0	
3	2397.250	H	56.9	32.2	0.2	57.1	32.4	76.0	56.0	18.9	23.6	100.0	347.9	
4	3575.243	V	42.8	27.3	4.1	46.9	31.4	80.0	60.0	33.1	28.6	100.0	23.6	
5	4768.851	H	38.8	25.6	8.4	47.2	34.0	80.0	60.0	32.8	26.0	100.0	189.3	
6	4786.090	V	49.1	27.1	8.5	57.6	35.6	80.0	60.0	22.4	24.4	100.0	11.3	

### ◆ Calculation

Result(PK/CAV) [dB(μV/m)] = (Reading(PK/CAV)[dB(μV)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(μV/m)] - Result(PK/CAV) [dB(μV/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

## Test Setup Photos and Configuration

### Conducted Emissions at Mains Power Ports


#### ■ DC Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr


## Conducted Emissions at Telecommunication Ports

### ■ DC Mode

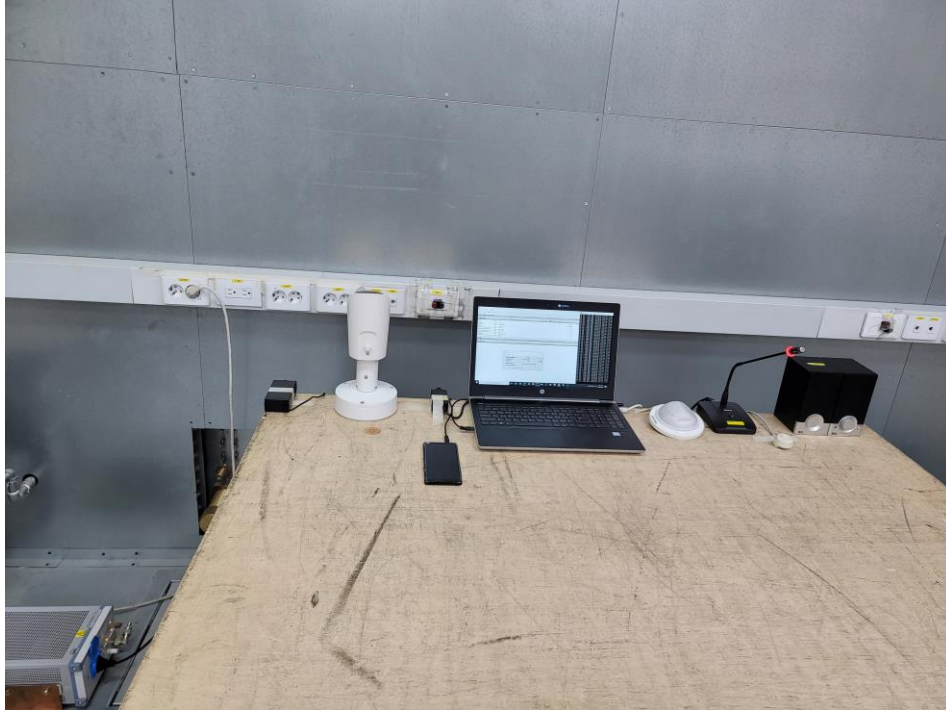

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

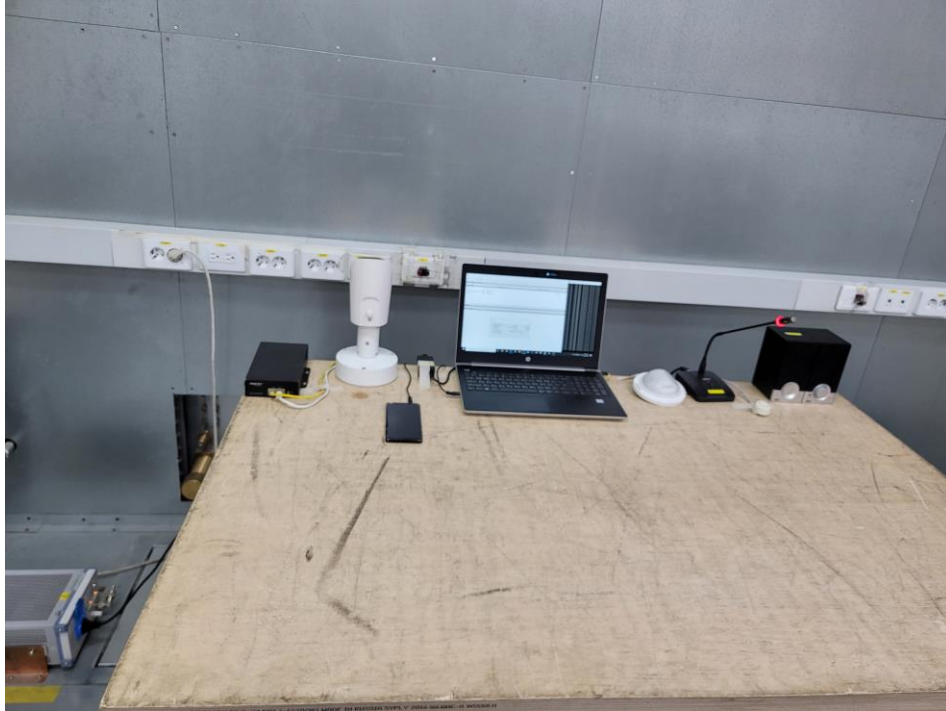


**■ PoE Mode**


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

## Radiated Electric Field Emissions(Below 1 GHz)

### ■ DC Mode

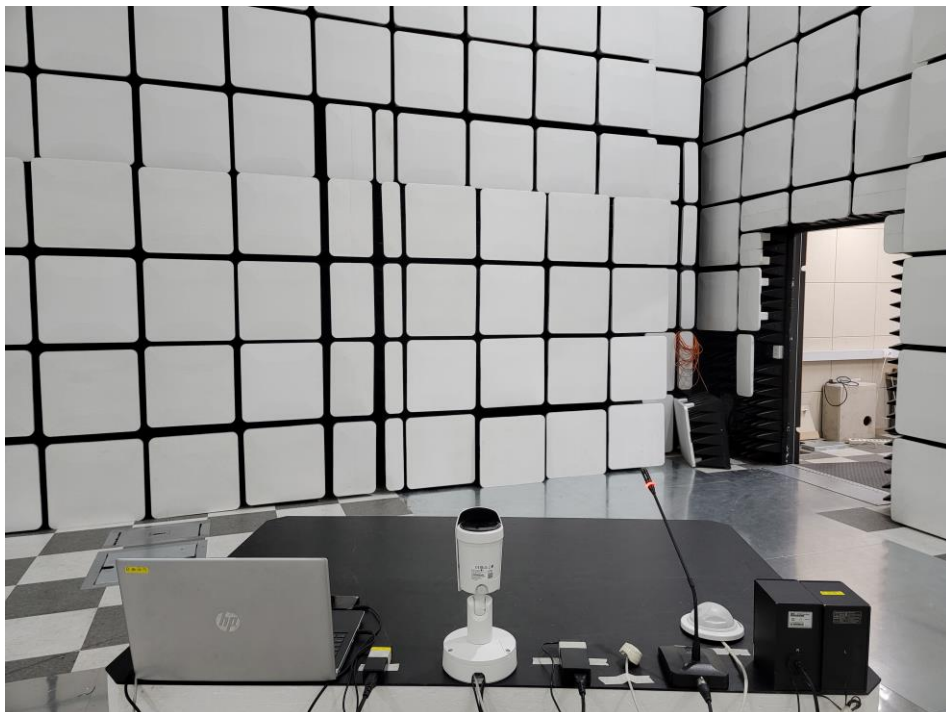

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr


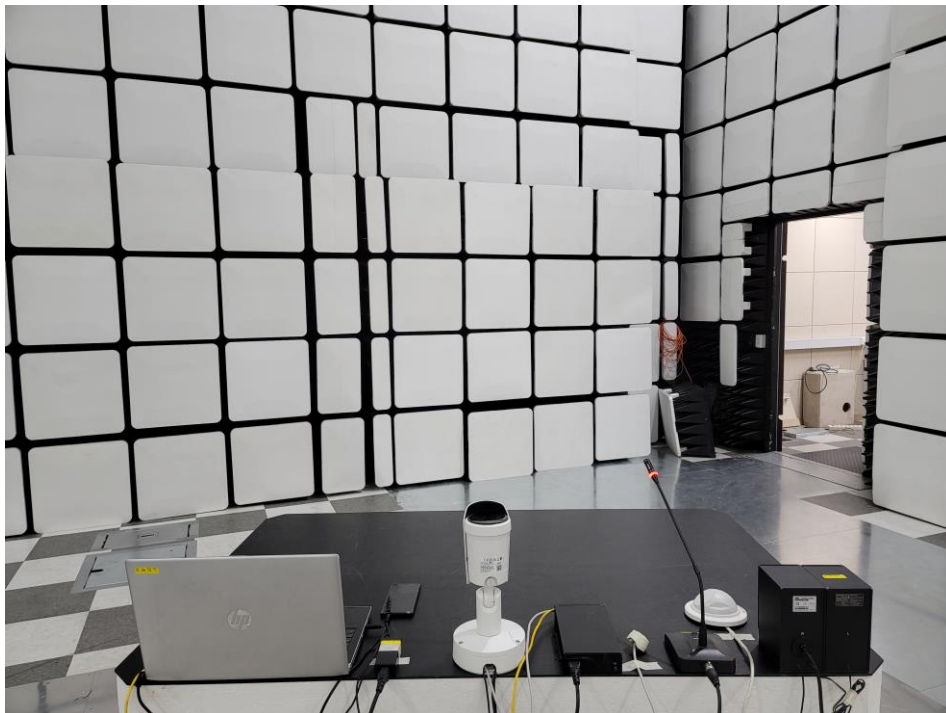
**■ PoE Mode**

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## Radiated Electric Field Emissions(Above 1 GHz)

### ■ DC Mode

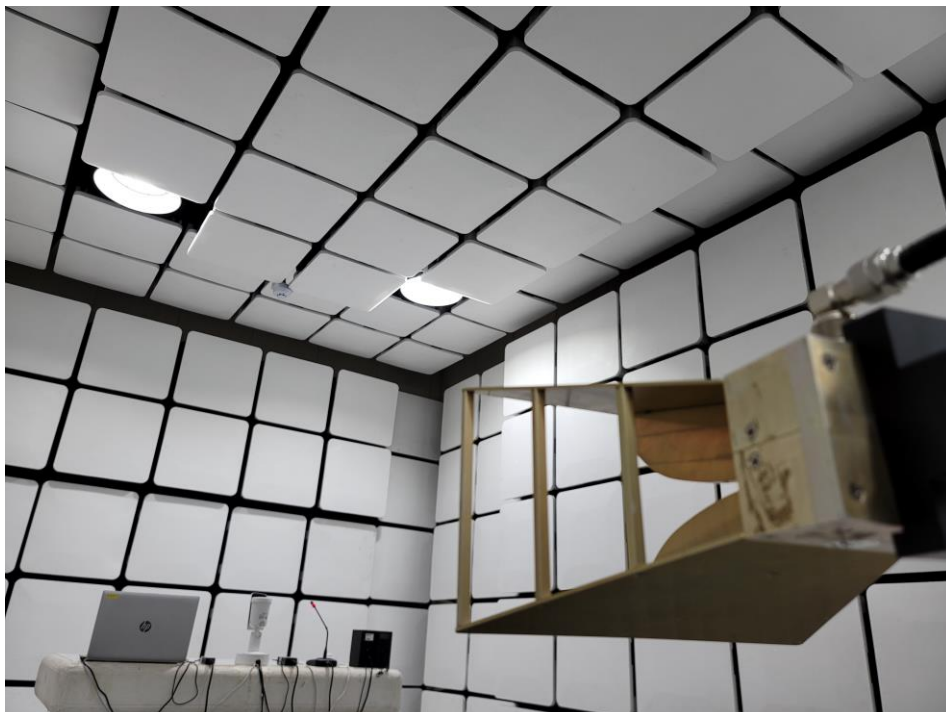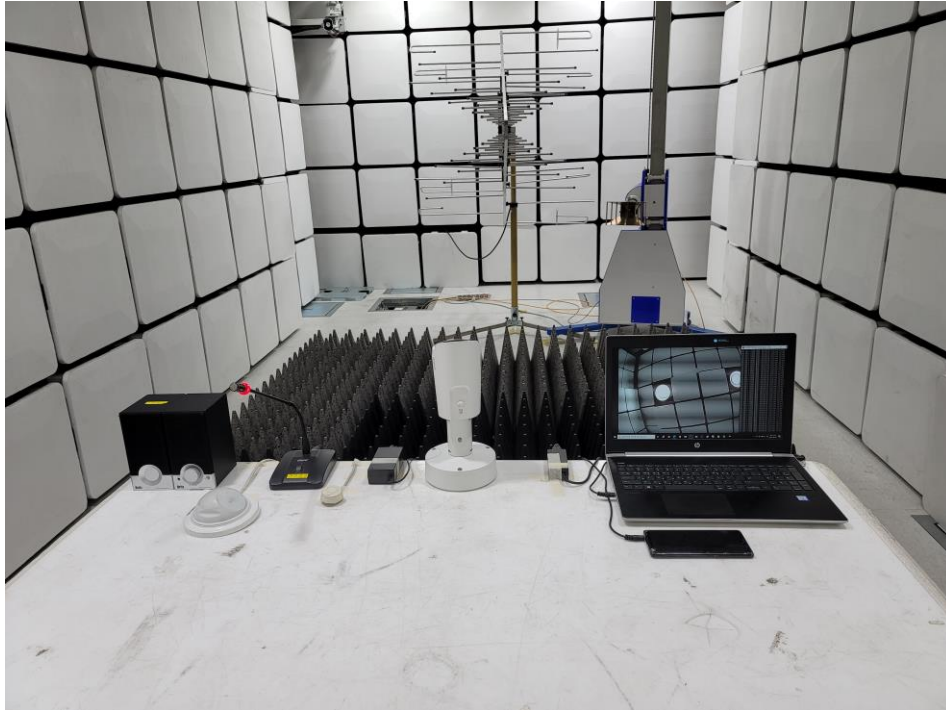

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## ■ PoE Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

## EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

## EUT Internal Photographs

(Internal View)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr




## EUT Internal View – Main Board

(Top)

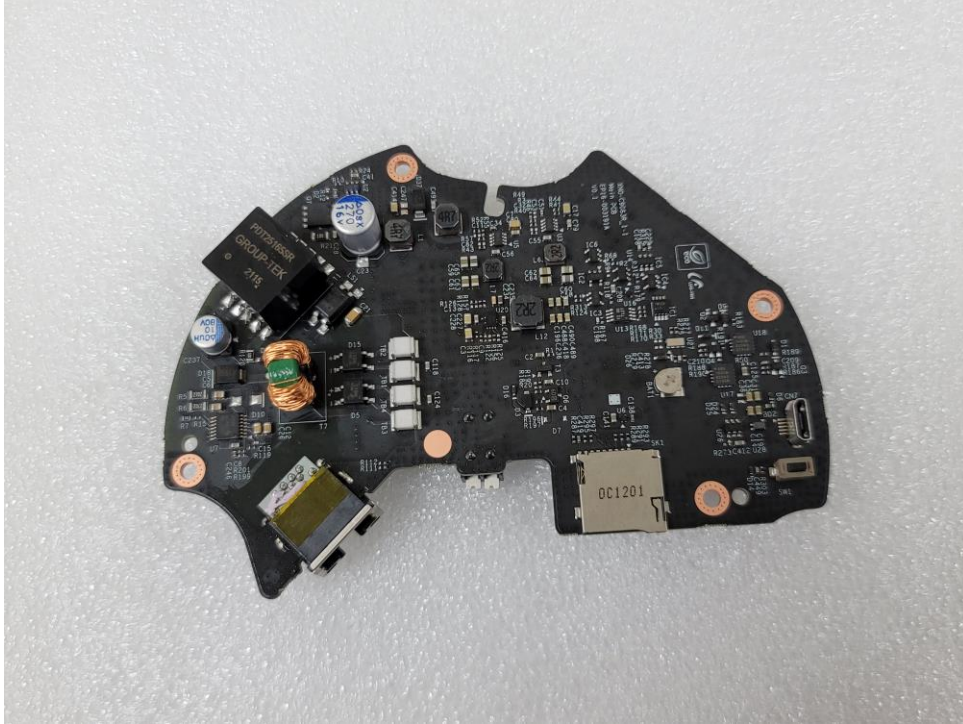

(Bottom)

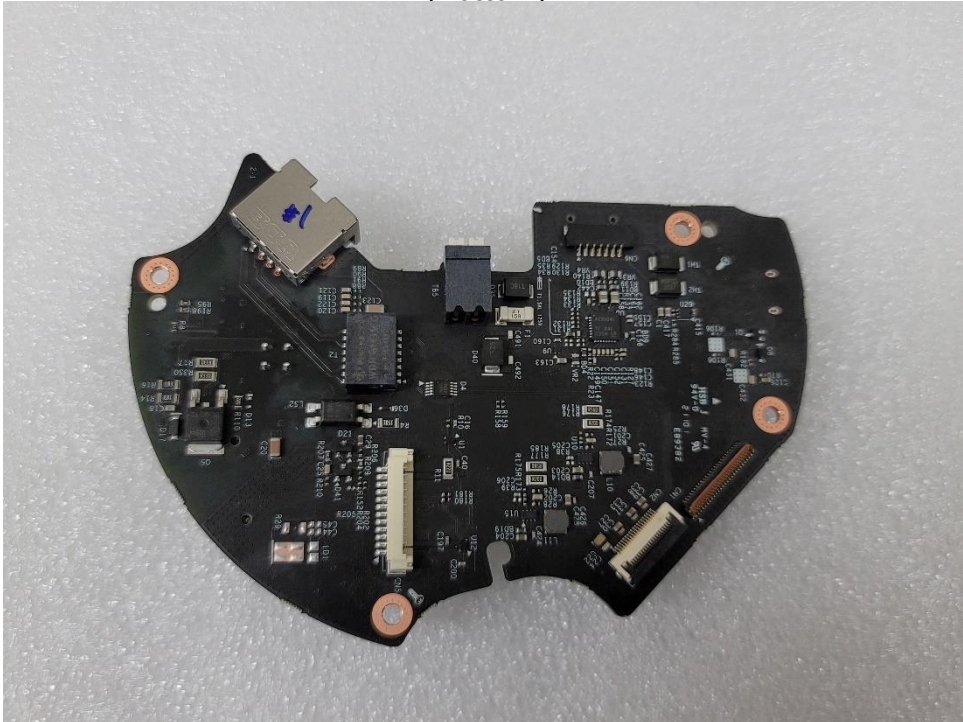

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

## EUT Internal View – FAN

(Top)



(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr



## EUT Internal View – IR LED Board

(Top)

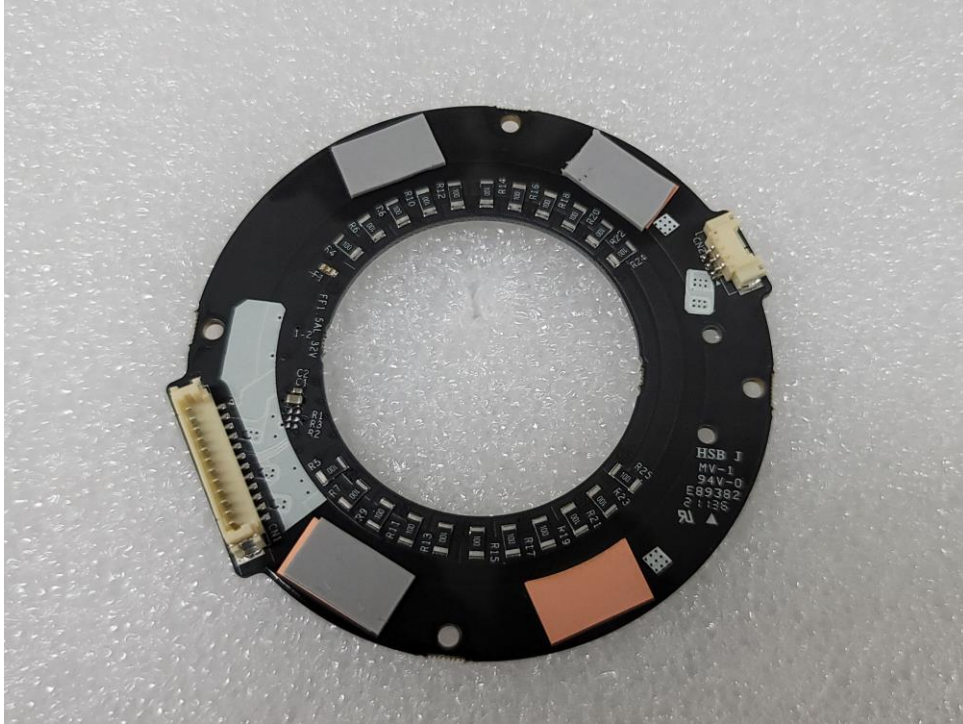

(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr

## EUT Internal View – Module

(Top)



(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr




## EUT Internal View – Network Board

(Top)

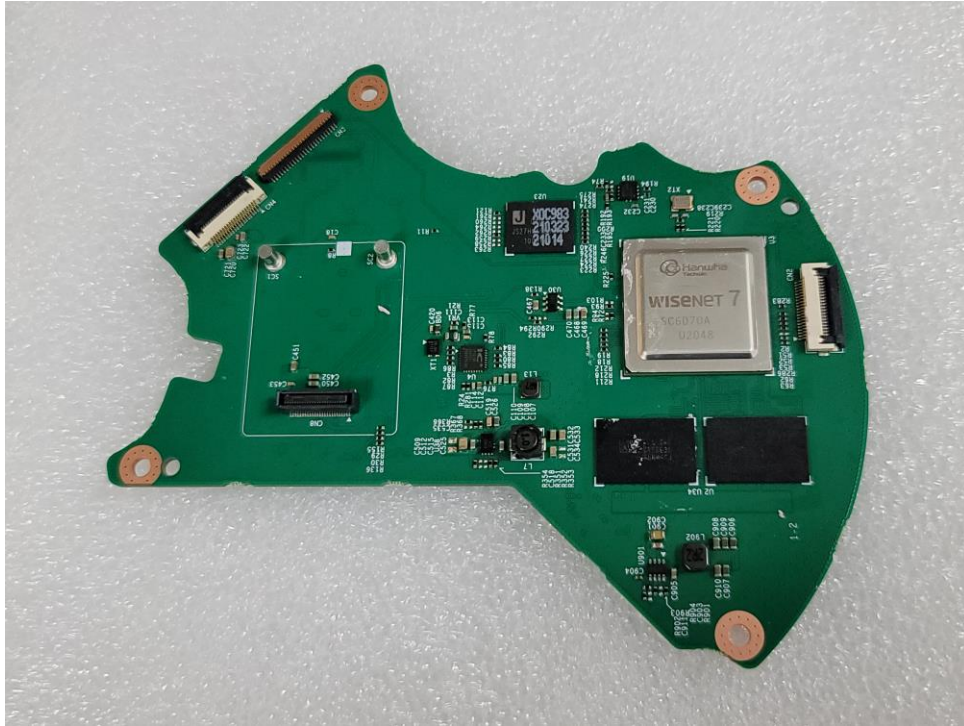

(Bottom)

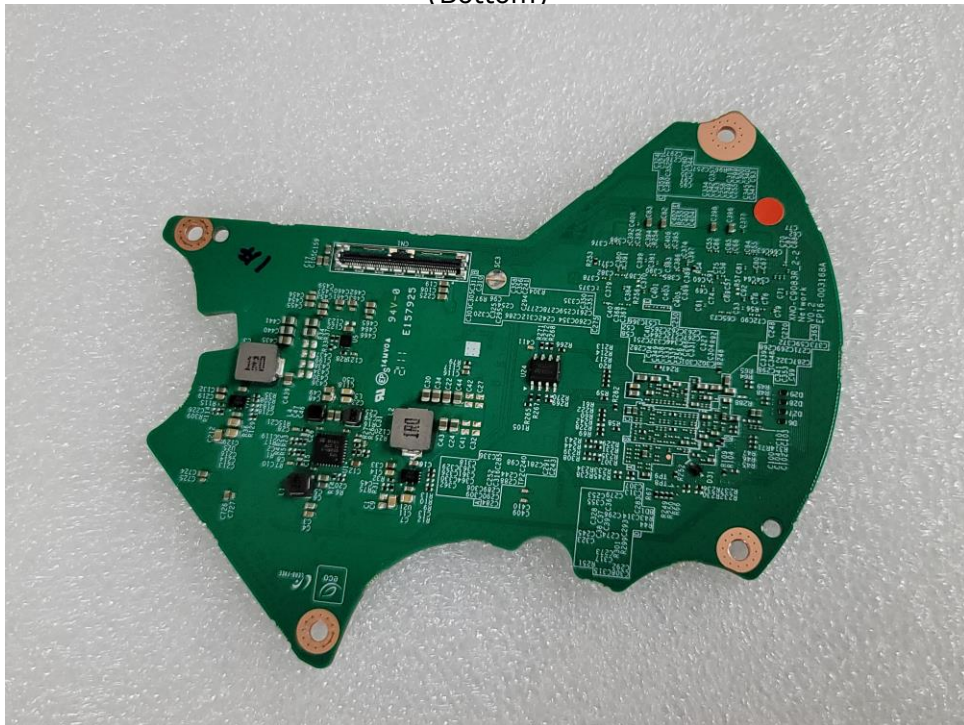


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr




## EUT Internal View – Sensor Board

(Top)

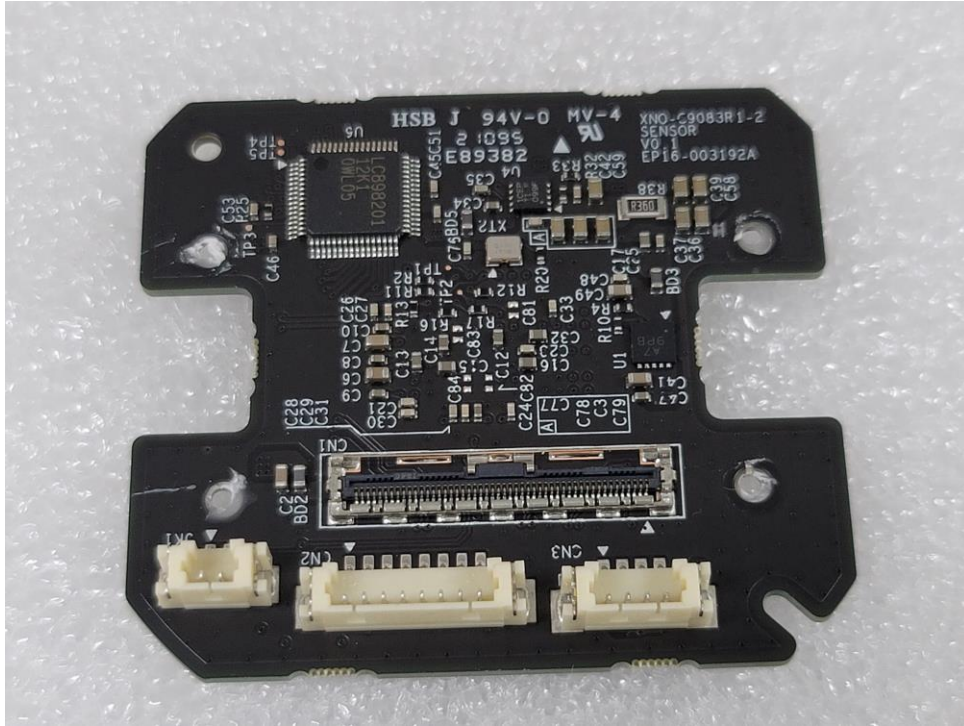

(Bottom)

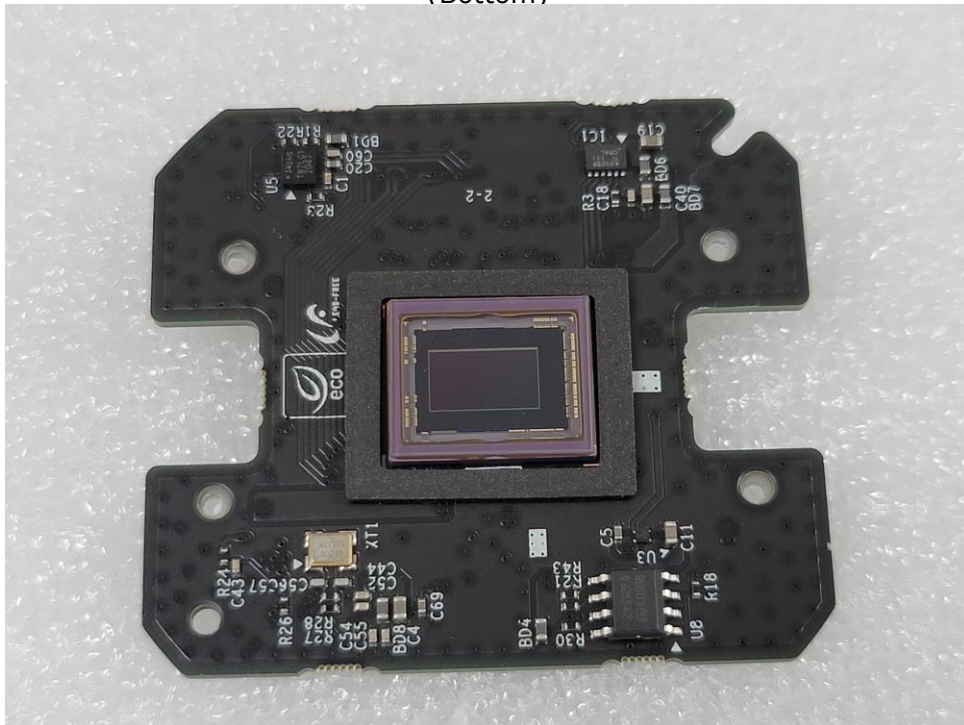


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact shchoi@kes.co.kr

## EUT Internal View – Lens

(Top)




(Bottom)

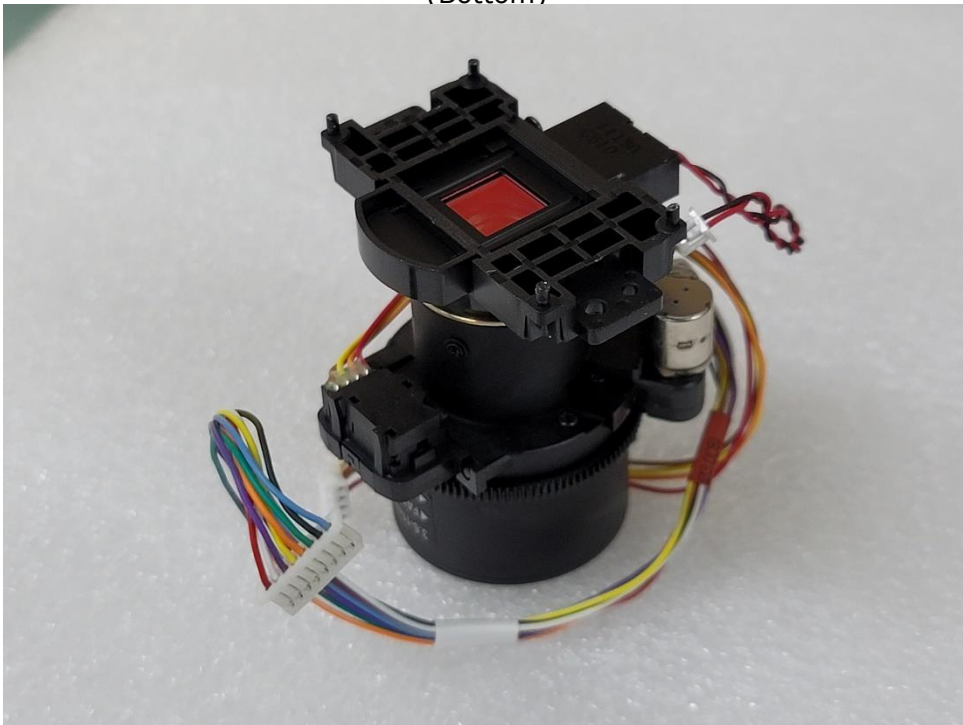

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact shchoi@kes.co.kr

## Label Photographs

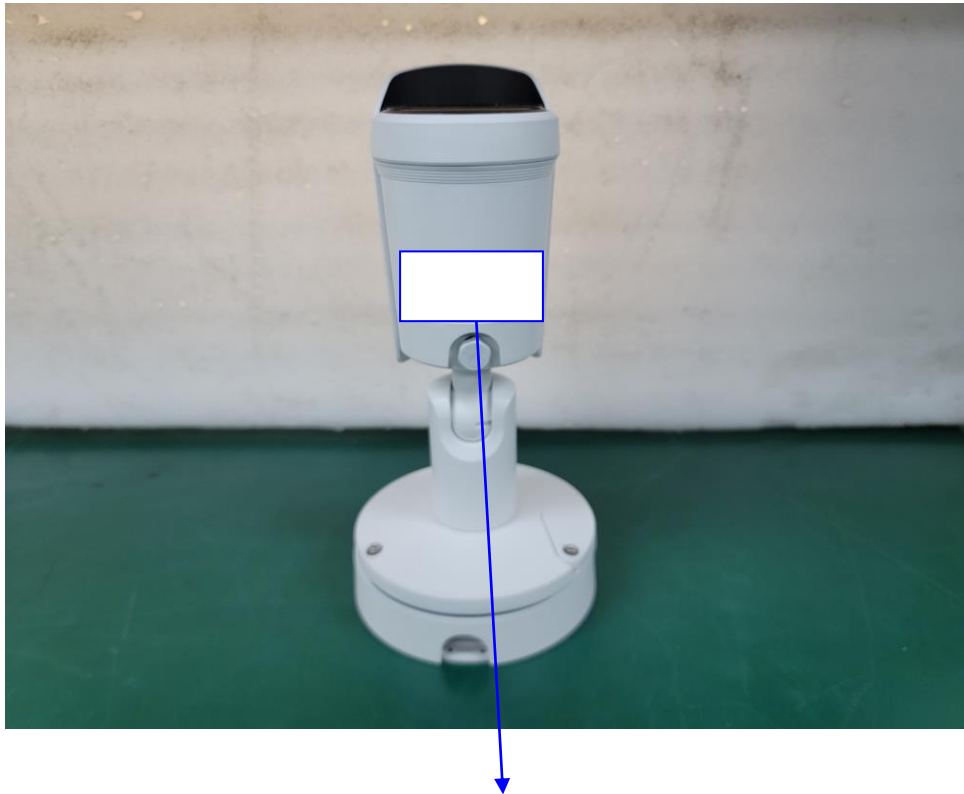

この装置は、クラスA情報技術装置です。この装置を家庭環境で使用すると電波妨害を引き起こすことがあります。この場合には使用者が適切な対策を講ずるよう要求されることがあります。 VCCI-A