

TEST REPORT

This laboratory is accredited by Radio Research Laboratory and National Voluntary Laboratory Accreditation Program. The tests reported herein have been performed in accordance with its terms of accreditation.

Test Report No. : LR500112108D
Issue Date : August 10, 2021
Applied Standard : FCC Part 15, Subpart B and ICES-003
Trade Name : Hanwha Techwin Co., Ltd.
Equipment Name : NETWORK CAMERA
Model Name : QNO-6032R
Additional Model Name : QNO-6022R, QNO-6012R, QNO-6012R1,
QNO-6022R1, QNO-6032R1
Serial Number : Identification

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. This test report is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.



Revision history

Revision	Date of issue	Test report No.	Description
0	03.05.2019	LR500111905D	Initial
1	10.08.2021	LR500112108D	Delete China Factory, Add Additional Models (QNO-6012R1, QNO-6022R1, QNO-6032R1)

>>TABLE OF CONTENTS<<

LTA Certification.....	4
General information's	6
1- Brief Information	7
2- Test Site Description.....	10
3- Test Procedure.....	12
4- List of Equipment Used For the Tests	15
5- EMISSION	16
5-1 Conducted Disturbance Measurements	16
5-2 Radiated Disturbance Measurements	18
Conclusions.....	24
Photograph of the measurements	25
Photograph of the EUT	31

LTA Certification

Applicant / Manufacture

Company name : Hanwha Techwin Co., Ltd.
Address : 6, Pangyo-ro 319 Beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do, 13488, KOREA
Telephone / Facsimile : +82-70-7147-8753(<http://hanhwa-security.com>)

Factory #1

Company name : HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.
Address : Lot O-2, Que Vo Industrial Zone extended area ,Nam Son commune, Bac Ninh city,Bac Ninh province, Vietnam

Factory #2

Company name : D-TECH CO.,LTD.
Address : 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi-do, Korea (Suwon Industrial Complex)

Equipment Under Test (EUT)

Equipment Name : NETWORK CAMERA
Model name : QNO-6032R
Additional Model name : QNO-6022R, QNO-6012R, QNO-6012R1, QNO-6022R1, QNO-6032R1
Additional Models are different only lens specification.
Serial number : Identification
Intended environment : Residential area
Date of receipt : April 09, 2019
EUT condition : Pre-production, not damaged
Interface Ports : DC IN, LAN, Alarm IN, Alarm OUT, Alarm Ground, MIC
Video OUT Port is a management Port.
Power rating : DC 12 V (Adapter), DC 48 V (PoE)
Test Mode : Rec mode (Adapter), Rec mode (PoE)
Test Voltage : AC 120 V, 60 Hz (Adapter, POE)

Model Description

- NONE

Model Specification

- NONE

*** To be continued next page ***

LTA Certification –cont.-**Test Performed**

Test started & completed : April 24, 2019
Location : LTA Co., Ltd.

Test Specification

Purpose of the test : Compliance test to the following standard
Applied standard : FCC Part 15, Subpart B and ICES-003
Classification : Class A
Deviations from Standard Test Method : N/A

Test Results

Measurement	Results*	Test method
Conducted disturbance	Complies	ANSI C 63.4-2014
Radiated disturbance	Complies	ANSI C 63.4-2014

* : The compliance statement is based on nominal value only.

Modification performed by the lab.:

- N.A

-We were performed the test according to LTA procedure LTA-QI-04.

Laboratory's Certificate

Report number : LR500112108D
Issue date : August 10, 2021

This test report is issued under the authority of:

The test was supervised by:



Young Kyu Shin, Technical Manager



Joo Hyung Cho, Test Engineer

The results in this report apply only to the sample(s) tested.

It is not allowed to copy this report even partly without the allowance of the test laboratory.

General information's

Purpose

This document is based on the Electromagnetic Interference (EMI) tests performed on the “QNO-6032R”. The measurements were performed according to the measurement procedure described in ANSI C 63.4-2014. The tests were carried out in order to confirm whether the electromagnetic emissions from the EUT(Equipment Under Test), are within the Class A limits defined in FCC Part 15, Subpart B- “Section 15.107- Conducted limits” and “Section 15.109-Radiated emission limits”.

Test Performed

Company name : LTA Co., Ltd
Address : 4, Songju-ro 236beon-gil, Yangji-myeon, Cheoin-gu, Yongin-si, Gyeonggi-do, 17159, Korea
Telephone : +82-31-323-6008
Facsimile : +82-31-323-6010

Measurement uncertainty

Conducted disturbance (0.15 to 30 MHz) : ± 2.80 [dB] (k=2)
Radiated disturbance (30 to 1,000 MHz) : H : ± 4.84 [dB] (k=2) V : ± 5.00 [dB] (k=2)
(1 GHz to 6 GHz) : H : ± 5.97 [dB] (k=2) V : ± 5.96 [dB] (k=2)
(6 GHz to 18 GHz) : H : ± 6.20 [dB] (k=2) V : ± 6.20 [dB] (k=2)

The coverage factor k=2 yields approx. a 95% level of confidence for near-normal distribution typical of most measurement results.

Accredited agencies

LTA Co., Ltd. Is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	2021-09-30	ECT accredited Lab.
	KOREA		-	
RRA	U.S.A	KR0049	2023-04-08	RRA accredited Lab.
	CANADA		2022-10-18	
		C-14948	2023-09-10	
VCCI	JAPAN	T-12416	2023-09-10	VCCI registration
		R-14483	2023-10-15	
		G-10847	2021-12-13	
KOLAS	KOREA	KT551	2021-08-20	KOLAS accredited Lab.

1- Brief Information

1-1 Test Summary

Parameter	Applied Standard	Status (note 1)
I. Emission		
Conducted disturbance	FCC Part 15.107 / ICES-003 Clause 6.1	C
Radiated disturbance	FCC Part 15.109 / ICES-003 Clause 6.2	C
Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable		
* The data in this test report are traceable to the national or international standards.		

Frequency range to be scanned:

0.15 MHz - 30 MHz as conducted measurement

30 MHz to 5th harmonic of the highest frequency or 40 GHz, whichever is lower as radiated measurement.

Bandwidth:

Measured by the CISPR quasi-peak function Bandwidth is 9 kHz in the frequency 0.15 MHz to 30 MHz and 120 kHz in the frequency 30 MHz to 1,000 MHz.

Measured by the Peak function Bandwidth is 1 MHz in the frequency 1 GHz to 40 GHz.

A sample calculation:

COR. F (correction factor)= Antenna factor + Cable loss- Amp.gain- Distance correction

Emission Level= meter reading + COR.F

1-2 Test mode of the EUT

The tests have been conducted with the following operational mode(s) of the EUT.

Name of mode in the report

Rec mode (Adapter), Rec mode (PoE)

1-3 Modification

- NONE

1-4 List of EUT and accessory

EUT				
Equipment Name	Model Name	Serial No.	Manufacturer	Remarks
NETWORK CAMERA	QNO-6032R	N/A	HANWHA TECHWIN SECURITY VIETNAM CO.,LTD. D-TECH CO.,LTD.	-
ACCESSORY / Rec mode (Adapter)				
Equipment Name	Model Name	Serial No.	Manufacturer	Remarks
Notebook	P56	N/A	HANSUNG	-
Notebook Adapter	A10-090P3A	N/A	Chicony	-
Alarm	N/A	N/A	N/A	-
Sensor	SPL-0030	N/A	SECOM	-
SD Card	KTJD8K9	N/A	N/A	-
Adapter	AH1212-K	N/A	JENTEC TECHNOLOGY CO., LTD	-
Mobile Phone	Gal	N/A	SAMSUNG	-
/ Rec mode (PoE)				
Equipment Name	Model Name	Serial No.	Manufacturer	Remarks
Notebook	P56	N/A	HANSUNG	-
Notebook Adapter	A10-090P3A	N/A	Chicony	-
Alarm	N/A	N/A	N/A	-
Sensor	SPL-0030	N/A	SECOM	-
SD Card	KTJD8K9	N/A	N/A	-
Mobile Phone	Gal	N/A	SAMSUNG	-
PoE Injector	GT96300-3656-T3-APOE	N/A	GlabTek, Inc	-

1-5 Cable List

Cable List / Rec mode (Adapter)						
From		To		Length (m)	Shielding	
Type	I/O Port	Type	I/O Port		Cable	backshell
EUT	DC IN	Adapter	DC OUT	1.2	NO	Plastic
	LAN	Notebook	LAN	3.0	NO	Plastic
	Alarm IN	Alarm	Alarm OUT	1.0	NO	Plastic
	Alarm OUT	Sensor	Sensor OUT	1.0	NO	Plastic
	Alarm Ground	Alarm	Alarm Ground	1.0	NO	Plastic
	Alarm Ground	Sensor	Sensor Ground	1.0	NO	Plastic
	SD Card	SD Card	-	-	-	-
	MIC	Mobile Phone	AUX	1.2	NO	Plastic
Notebook	DC IN	Notebook Adapter	DC OUT	1.5	NO	Plastic
Notebook Adapter	AC IN	AC Power Source	3 Pin AC Line	1.5	NO	Plastic
/ Rec mode (PoE)						
From		To		Length (m)	Shielding	
Type	I/O Port	Type	I/O Port		Cable	backshell
EUT	LAN	PoE Injector	DATA/Power	3.0	NO	Plastic
	Alarm IN	Alarm	Alarm OUT	1.0	NO	Plastic
	Alarm OUT	Sensor	Sensor OUT	1.0	NO	Plastic
	Alarm Ground	Alarm	Alarm Ground	1.0	NO	Plastic
	Alarm Ground	Sensor	Sensor Ground	1.0	NO	Plastic
	SD Card	SD Card	-	-	-	-
	MIC	Mobile Phone	AUX	1.2	NO	Plastic
PoE Inejctor	DATA	PoE Injector	LAN	3.0	NO	Plastic
	AC IN	AC Power Source	3 Pin AC Line	1.5	NO	Plastic
Notebook	DC IN	Notebook Adapter	DC OUT	1.5	NO	Plastic
Notebook Adapter	AC IN	AC Power Source	3 Pin AC Line	1.5	NO	Plastic

2- Test Site Description


1-Facility

All the testing facilities are periodically serviced as a daily check for equipment and cables systems, an every 6 months facility check for the facilities and a monthly check and annual calibration for testing equipment according to ISO/IEC 17025. All the testing facilities are used as the same specifications shown below. There are descriptions both for radiated disturbance measurement and conducted disturbance measurement conformed by ANSI C 63.4-2014.


The NSA measurement of the 10 m chamber was performed on February 05, 2018 according to ANSI C 63.4:2014

The SVSWR measurement of the 10 m chamber was performed on February 03, 2018 according to ANSI C 63.4:2014


2-1 Conducted Disturbance Measurement

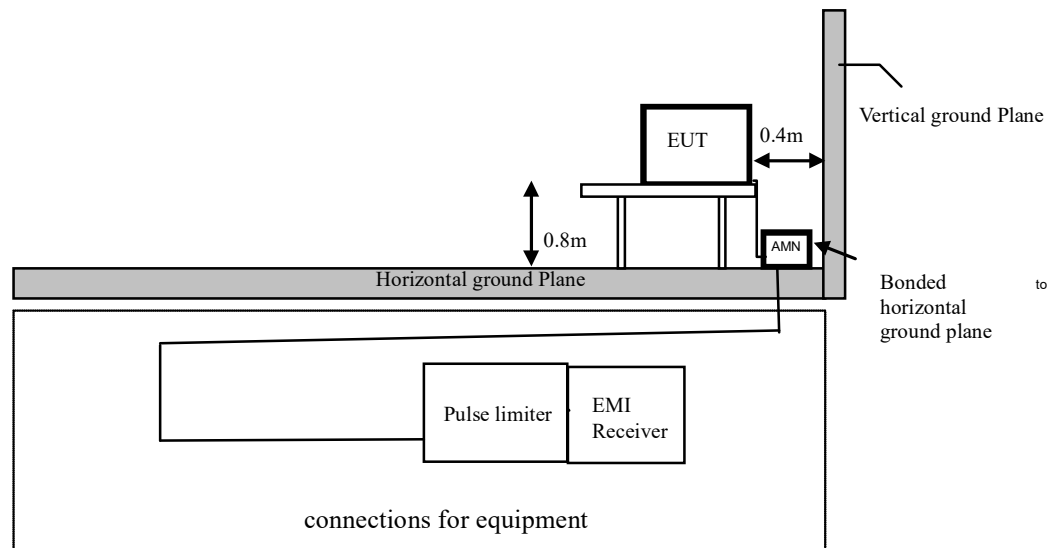

2-2 Radiated Disturbance Measurement – Below 1 GHz

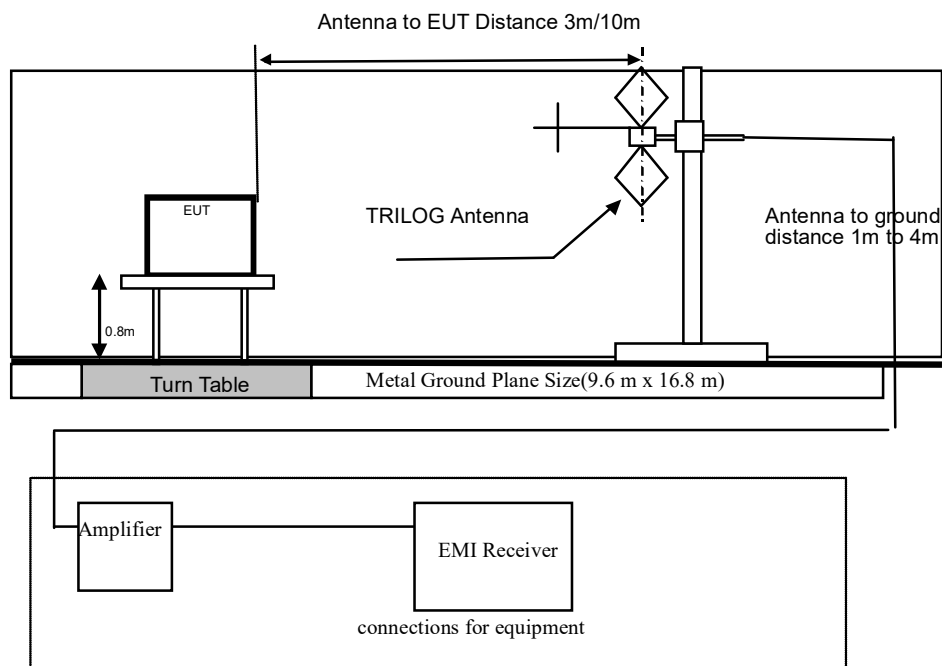

2-3 Radiated Disturbance Measurement – Above 1GHz

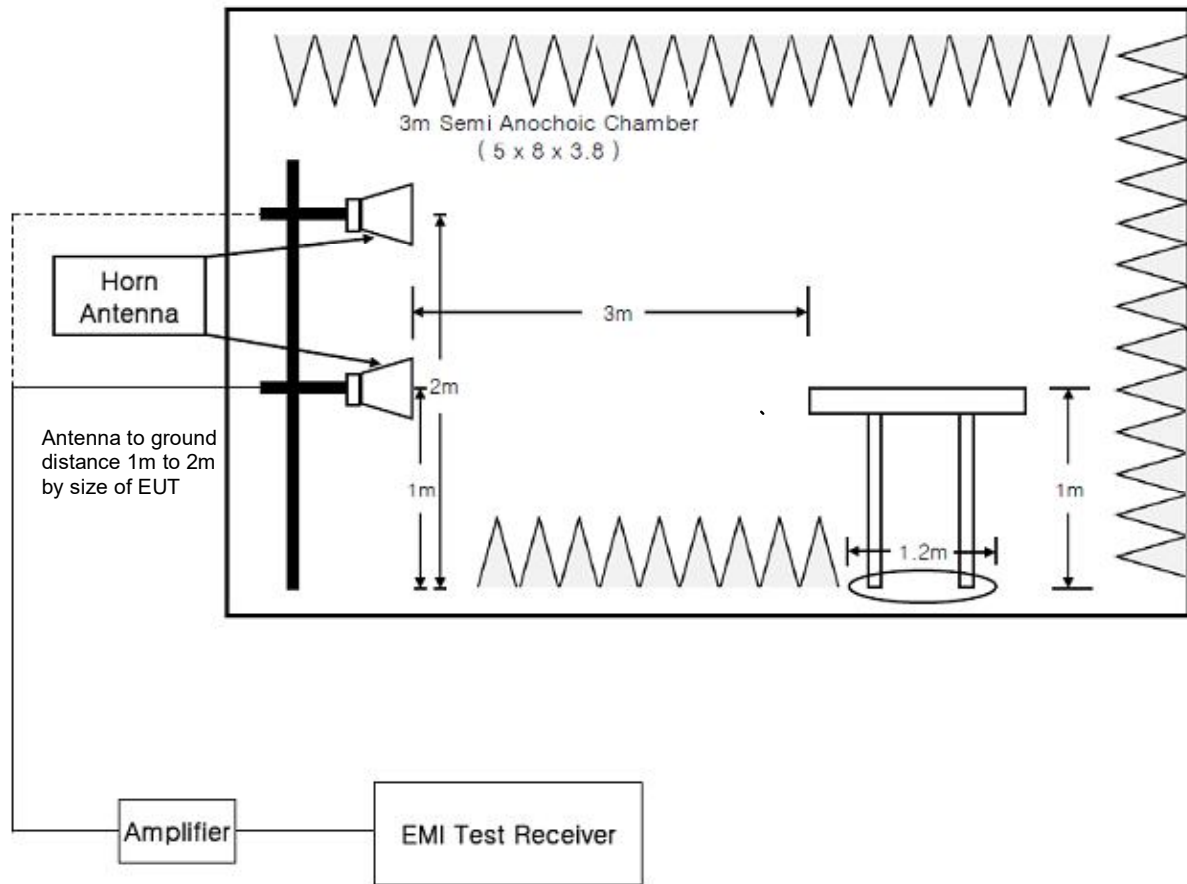

3- Test Procedure

3-1 Conducted Disturbance Measurements

- The measurement is carried out on an open site with horizontal and metallic ground plane.
- An AMN(Artificial Mains Network) with a nominal impedance ($50\ \Omega/50\ \mu\text{H}$) as defined in ANSI C 63.4-2014., shall be utilized.
- The AMN is grounded on a horizontal metal ground plane.
- Measurement is carried out using an EMI receiver with quasi-peak detectors and average detector.
(Refer to the List of test equipment used for the test.)
- The shortest distance between the EUT and the AMN is 0.8 m.
- The EUT is placed on the non-conducting table with 0.8 m height.
- A remote switch is used for changing phases between Line (L) and Neutral (N).
- Refer to "Brief Information"(page 7-8) about details of the EUT and configuration of the cables.

- Measurement is carried out as manual operation.
 - detecting the maximized emission level using the maxhold function after setting the spectrum analyzer bandwidth 1 kHz and the frequency range from 150 kHz to 1 MHz , 1 MHz to 5 MHz and 5 MHz to 30 MHz.
 - searching the maximum frequency point of the disturbance wave in each frequency range.
 - reading the disturbance level of quasi-peak, average and Line (L) and Neutral (N) in 9 kHz bandwidth by the EMI receiver.
 - calculating the measurement result with the following formula or equation.
(Result = Reading + Cor.F.(LISN Factor + Cable Loss + Pulse Limiter)
(ex) = 13.23 dB μ V + (9.63 dB + 0.01 dB + 9.86 dB)
 = 32.73 dB μ V

3-2 Radiated Disturbance Measurements – Below 1GHz

- Test site is met the requirements of ANSI C 63.4-2014 and the distance between the EUT and the antenna is adjusted 3 m/10 m.
- The turntable can be rotated 360 degrees.
- The antenna can be adjusted between 1m and 4m in height above the ground.
- The EUT is placed on the non-conducting table with 0.8 m height on the turntable.
- Measurements are carried out using a EMI test receiver with peak detectors (100 kHz bandwidth) and an EMI receiver with quasi-peak detectors (120 kHz bandwidth).
- Refer to the list of test equipment used for the test.
- TRILOG antenna are used as wideband antenna.
- The TRILOG antenna is used in the frequency range of 30 MHz to 1 000 MHz.
- A variable attenuator is used for verifying amplifier's linearity.
- Rotating the turntable and adjusting the height of the antenna are carried out by control buttons on the console.
- Refer to "Brief Information"(page 7-9) about details of the EUT and configuration of the cables.

- Measurement is carried out by a LTA operator as manual operation.
 - searching for some of High disturbance frequency points than the other points with the following settings; bandwidth 100 kHz, frequency range 10 MHz between 30 MHz and 300 MHz and frequency range 50 MHz between 300 MHz and 1 GHz.
 - searching the worst direction with the maximum level of the disturbance wave in rotating the turntable 360 degrees at each searched frequency point.
 - setting the height of the antenna with the maximum level of the disturbance wave from 1m to 4m.
 - reading the disturbance level by the EMI receiver with quasi-peak detectors (120 kHz bandwidth) according to ANSI C 63.4-2014.
 - measuring to vertical and horizontal polarization.
 - calculating the measurement result with the following formula or equation:
(Result = Reading +Cor.F (antenna factor + cable loss – PreAmp Gain)
(ex) = 50.6 dB μ V/m + (11.08 dB(1/m) + 1.31 dB -27.32 dB)
= 35.67 dB μ V/m

3-3 Radiated Disturbance Measurements – Above 1GHz

- Test site is met the requirements of ANSI C 63.4-2014 and the distance between the EUT and the antenna is adjusted 3 m.
 - The turntable can be rotated 360 degrees.
 - The antenna can be adjusted between 1m and 4 m in height above the ground.
 - The EUT is placed on the non-conducting table with 1 m height on the turntable.
 - Measurements are carried out using a EMI test receiver with peak detectors (1 MHz bandwidth) and an EMI receiver with peak and average detectors(1 MHz bandwidth).
 - Refer to the list of test equipment used for the test.
 - HORN antenna are used as wideband antenna.
 - The HORN antenna is used in the frequency range of 1 GHz to 18 GHz.
 - A variable attenuator is used for verifying amplifier's linearity.
 - Rotating the turntable and adjusting the height of the antenna are carried out by control buttons on the console.
 - Refer to "Brief Information"(page 7-9) about details of the EUT and configuration of the cables.
 - Measurement is carried out by a LTA operator as manual operation.
 - searching the worst direction with the maximum level of the disturbance wave in rotating the turntable 360 degrees at each searched frequency point.
 - setting the height of the antenna with the maximum level of the disturbance wave from 1 m to 4 m
 - reading the disturbance level by the EMI receiver with peak and average detectors (1 MHz bandwidth) according to ANSI C 63.4-2014.
 - measuring to vertical and horizontal polarization.
 - calculating the measurement result with the following formula or equation:
(Result = Reading +Cor.F (antenna factor + cable loss – PreAmp Gain)
- (ex) = 35.9 dBμV/m + (23.92 dB(1/m) + 7.01 dB - 38.33 dB)
 = 28.5 dBμV/m

4- List of Equipment Used For the Tests

Conducted emissions

	Item	Model Name	Manufacturer	Serial No.	Next Cal.	Interval
<input checked="" type="checkbox"/>	EMI TEST Receiver	ESR	Rohde & Schwarz	101499	2019.07.11	1 year
<input checked="" type="checkbox"/>	Pulse Limiter	ESH3-Z2	Rohde & Schwarz	100710	2020.03.16	1 year
<input type="checkbox"/>	LISN	ESH3-Z6	Rohde & Schwarz	100378	2019.09.07	1 year
<input type="checkbox"/>	LISN	ESH3-Z6	Rohde & Schwarz	101468	2019.09.07	1 year
<input checked="" type="checkbox"/>	LISN(main)	ENV216	Rohde & Schwarz	100408	2019.10.10	1 year
<input checked="" type="checkbox"/>	LISN(sub)	LT32C/10	AFJ	32031518210	2019.09.06	1 year
<input checked="" type="checkbox"/>	TEST PROGRAM	e3_ce 20181212a (V9)	AUDIX	-	-	-

Radiated Emission – Below 1 GHz

	Item	Model Name	Manufacturer	Serial No.	Next Cal.	Interval
<input checked="" type="checkbox"/>	EMI TEST Receiver	ESU	Rohde & Schwarz	100092	2019.09.06	1 year
<input checked="" type="checkbox"/>	Amplifier (25 dB)	8447D	HP	2944A07684	2019.09.06	1 year
<input checked="" type="checkbox"/>	BILOG Antenna	VULB9168	SCHWARZBECK	775	2020.04.12 (RRA)	2 year
<input checked="" type="checkbox"/>	TEST PROGRAM	e3 20181212a (V9)	AUDIX	-	-	-

Radiated Emission – Above 1 GHz

	Item	Model Name	Manufacturer	Serial No.	Next Cal.	Interval
<input checked="" type="checkbox"/>	EMI TEST Receiver	ESU	Rohde & Schwarz	100092	2019.09.06	1 year
<input checked="" type="checkbox"/>	Amplifier	8449B	HP	3008A00671	2019.09.06	1 year
<input checked="" type="checkbox"/>	HORN ANTENNA	3115	ETS	114105	2019.09.26 (RRA)	2 year
<input checked="" type="checkbox"/>	TEST PROGRAM	e3 20181212a (V9)	AUDIX	-	-	-

5- EMISSION

5-1 Conducted Disturbance Measurements

MODE : Rec mode (Adapter)

(LINE)



4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel:+82-31-3236008,9
Fax:+82-31-3236010

EUT /Model No. : QNO-6032R


Phase : Line

Test Mode : Rec mode (Adapter)

Test Power : 120 / 60

Temp./ Humi. : 21°C / 39% R.H.

Test Engineer : LEE G W

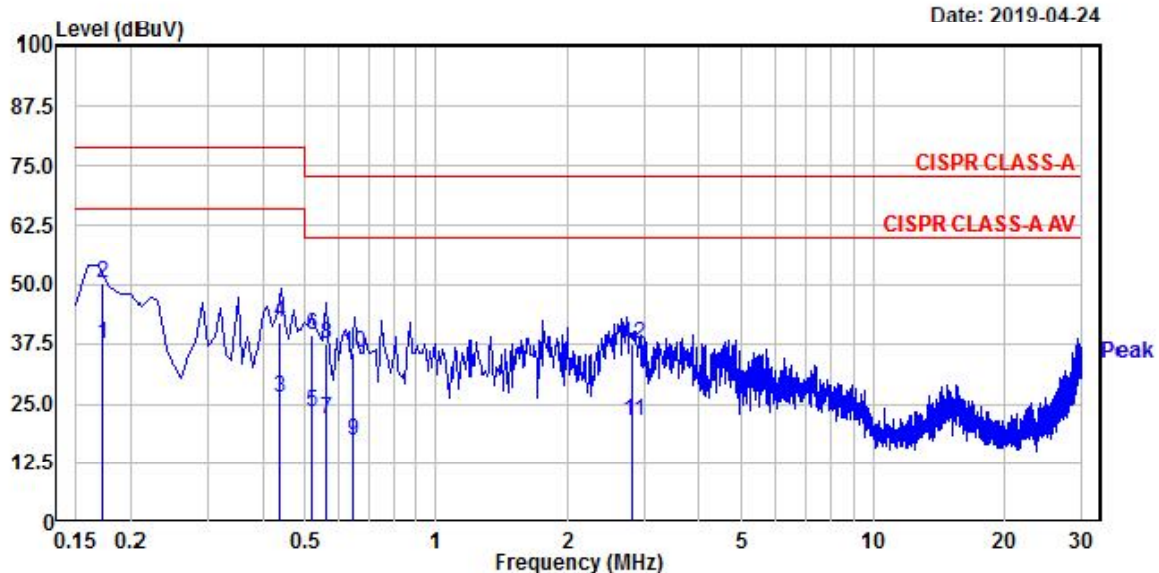

Trace: 1									
Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin
MHz	QP	AV	dB	QP	AV	QP	AV	QP	AV
	dBuV	dBuV		dBuV	dBuV	dBuV	dBuV	dB	dB
0.172	30.70	17.75	19.43	50.13	37.18	79.00	66.00	28.87	28.82
0.438	22.24	7.02	19.46	41.70	26.48	79.00	66.00	37.30	39.52
0.517	19.91	3.79	19.47	39.38	23.26	73.00	60.00	33.62	36.74
0.561	17.87	2.23	19.47	37.34	21.70	73.00	60.00	35.66	38.30
0.646	15.95	-2.03	19.47	35.42	17.44	73.00	60.00	37.58	42.56
2.810	17.64	1.93	19.55	37.19	21.48	73.00	60.00	35.81	38.52

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

-Continue

(NEUTRAL)



4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel:+82-31-3236008,9
Fax:+82-31-3236010

EUT /Model No. : QNO-6032R


Phase : Neutral

Test Mode : Rec mode (Adapter)

Test Power : 120 / 60

Temp./ Humi. : 21'C / 39% R.H.

Test Engineer : LEE G W

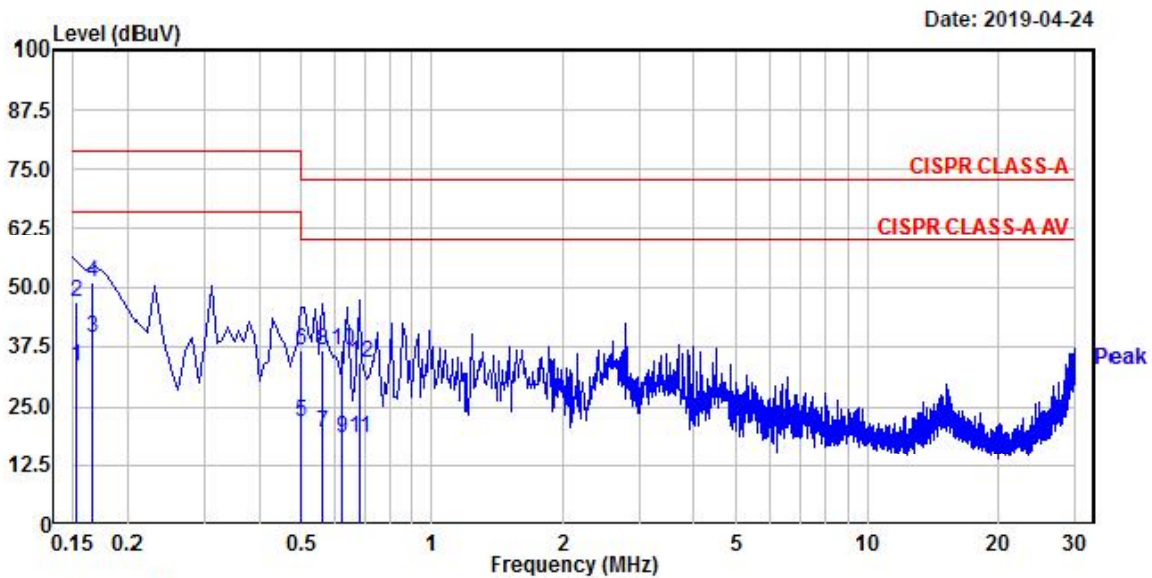

Trace: 1										
Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin	
MHz	QP	AV	dB	QP	AV	QP	AV	QP	AV	
	dBuV	dBuV		dBuV	dBuV	dBuV	dBuV	dB	dB	
0.152	27.48	13.79	19.44	46.92	33.23	79.00	66.00	32.08	32.77	
0.166	31.45	19.84	19.44	50.89	39.28	79.00	66.00	28.11	26.72	
0.500	17.18	2.60	19.47	36.65	22.07	79.00	66.00	42.35	43.93	
0.557	17.14	0.23	19.47	36.61	19.70	73.00	60.00	36.39	40.30	
0.623	16.96	-1.08	19.47	36.43	18.39	73.00	60.00	36.57	41.61	
0.691	14.52	-0.95	19.47	33.99	18.52	73.00	60.00	39.01	41.48	

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

5-2 Radiated Disturbance Measurements

MODE : Rec mode (Adapter)

(Below 1GHz) / V



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: QN0-6032R

Temp/Humi: 23 / 36

Test Mode : Rec mode (Adapter)

Tested by: LEE G W

Date: 2019-04-24

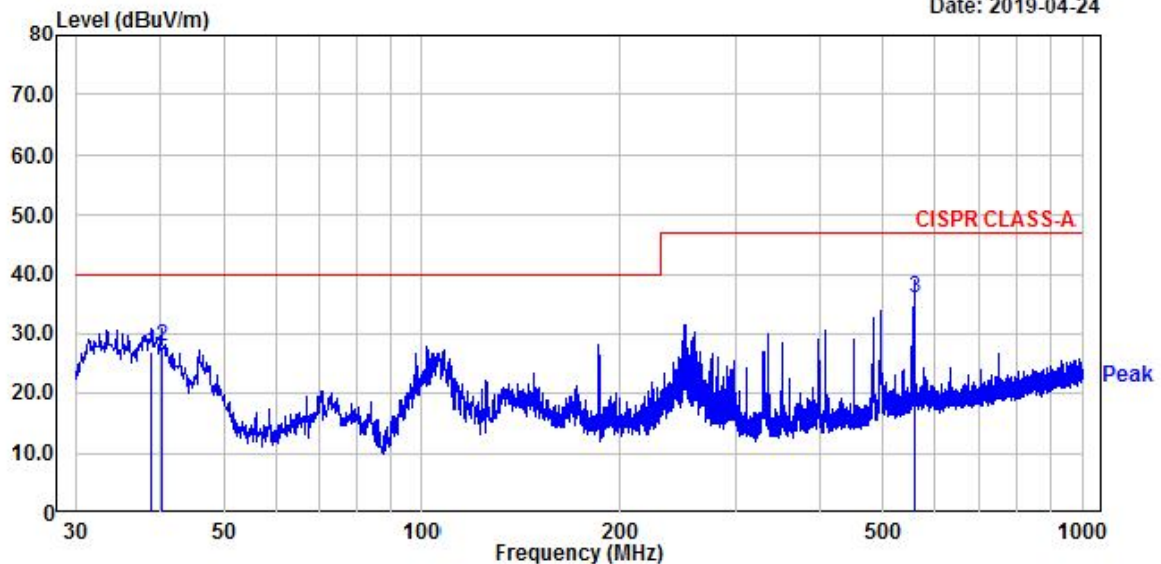

Freq MHz	Reading dBuV	C.F dB	Result QP dBuV/m	Limit dBuV/m	Margin dB	Height cm	Angle deg	Polarity
38.85	41.44	-14.59	26.85	40.00	13.15	100	351	vertical
40.19	42.33	-14.45	27.88	40.00	12.12	108	317	vertical
556.83	43.68	-7.86	35.82	47.00	11.18	104	198	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

-Continue

(Below 1 GHz) / H




4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: QN0-6032R

Temp/Humi: 23 / 36

Test Mode : Rec mode (Adapter)

Tested by: LEE G W

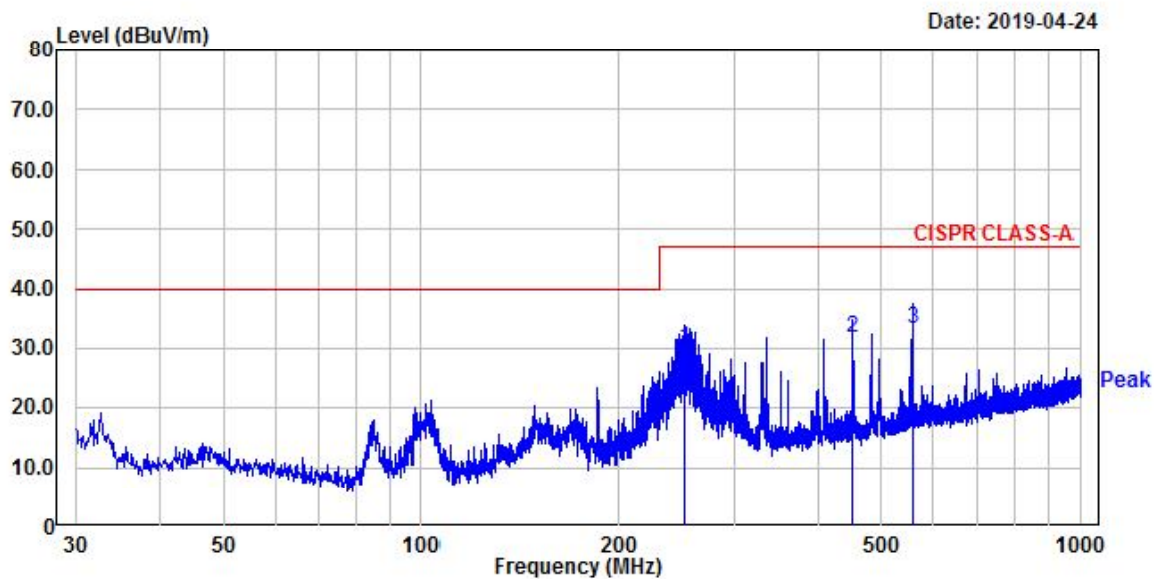

Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
MHz	dBuV	dB	QP dBuV/m	dBuV/m	dB	cm	deg	
251.40	44.17	-14.28	29.89	47.00	17.11	362	25	horizontal
450.01	41.59	-9.92	31.67	47.00	15.33	273	76	horizontal
556.83	41.14	-7.86	33.28	47.00	13.72	227	151	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

-Continue

MODE : Rec mode (PoE)

(Below 1 GHz) / V




4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: QNO-6032R

Temp/Humi: 23 / 36

Test Mode : Rec mode (PoE)

Tested by: LEE G W

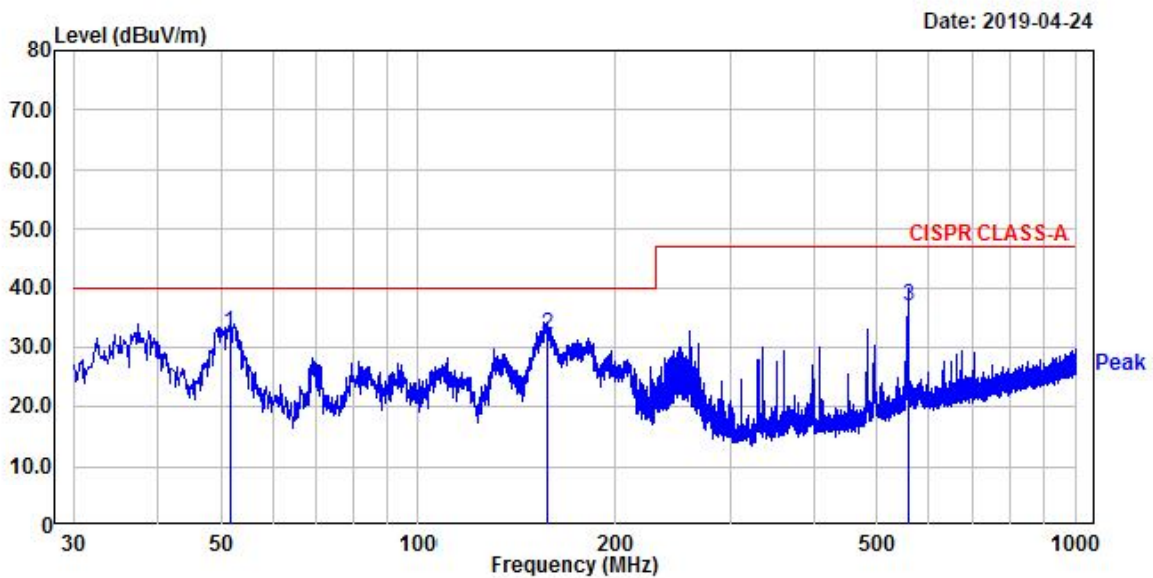

Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
MHz	dBuV	dB	QP dBuV/m	dBuV/m	dB	cm	deg	
51.58	45.72	-13.31	32.41	40.00	7.59	117	264	vertical
156.71	44.27	-12.30	31.97	40.00	8.03	108	142	vertical
556.83	43.10	-6.32	36.78	47.00	10.22	100	355	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

-Continue

(Below 1 GHz) / H




4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: QNO-6032R

Temp/Humi: 23 / 36

Test Mode : Rec mode (PoE)

Tested by: LEE G W

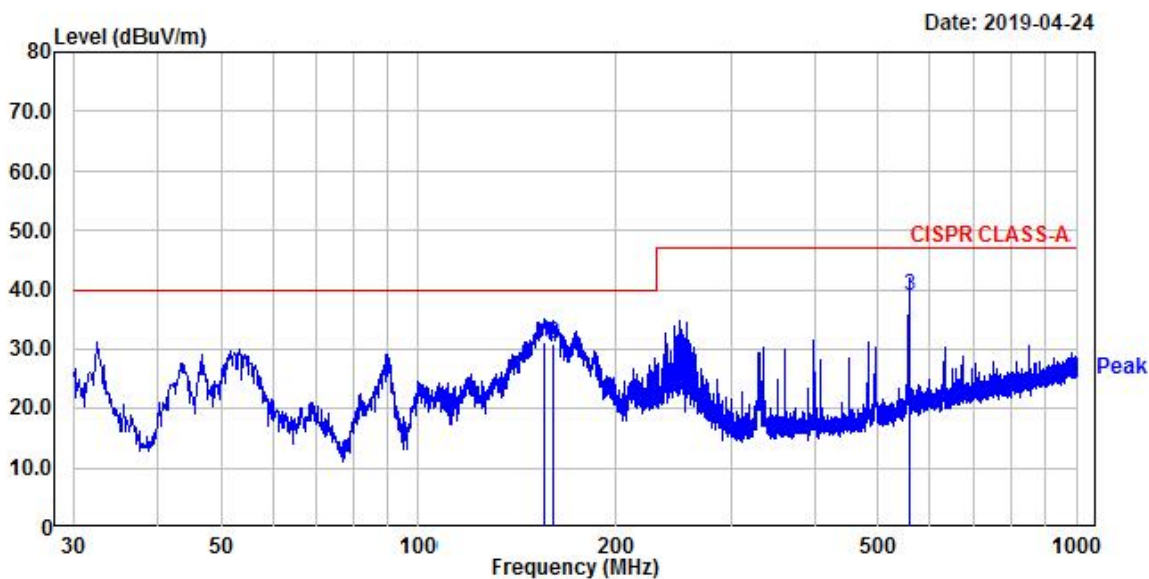

Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
MHz	dBuV	dB	QP dBuV/m	dBuV/m	dB	cm	deg	
155.62	43.44	-12.35	31.09	40.00	8.91	351	91	horizontal
160.59	43.05	-12.36	30.69	40.00	9.31	310	124	horizontal
556.95	45.25	-6.32	38.93	47.00	8.07	265	132	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

-Continue

MODE : Rec mode (Adapter)


(Above 1 GHz) / H

EUT/Model No.: QNO-6032R

Temp/Humi: 23 / 36

Test Mode : Rec mode (Adapter)

Tested by: LEE G W

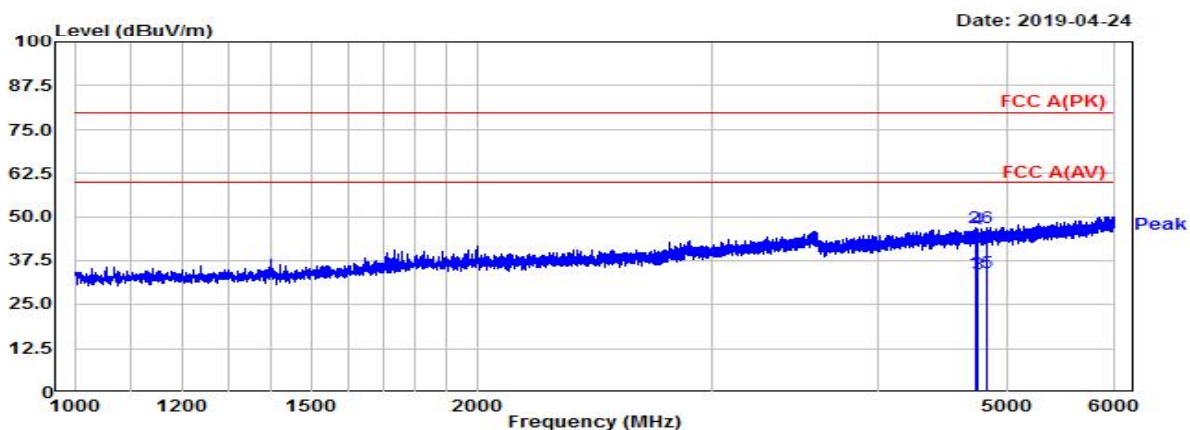


(Above 1 GHz) / V

EUT/Model No.: QNO-6032R

Temp/Humi: 23 / 36

Test Mode : Rec mode (Adapter)

Tested by: LEE G W

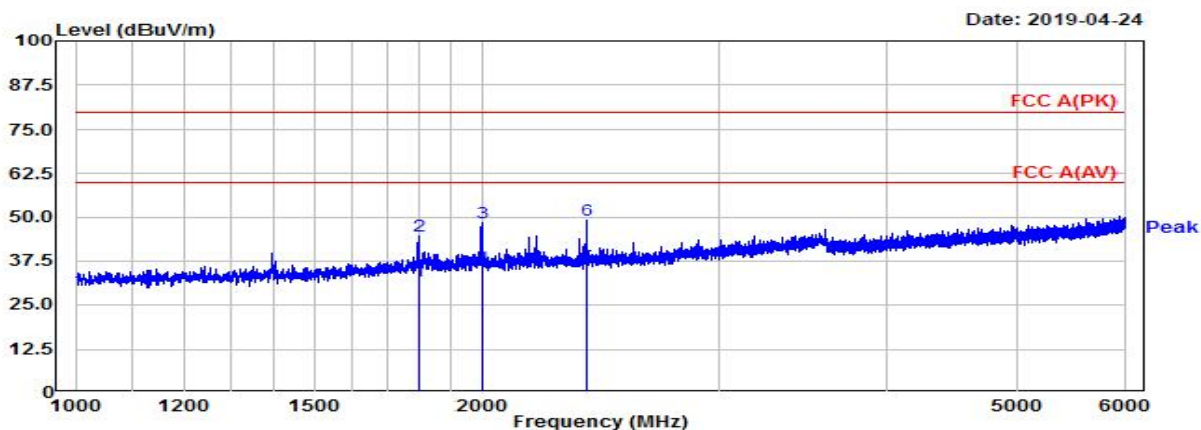

Manufacture : HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.

Test Date

Temp.:

Humidity:

Distance

Model : QNO-6032R

2019-04-24

23

36

3.8

TEST mode : Rec mode(Adapter)

Freq.(MHz)	Reading(PK)	Reading(AV)	C.F	Result(PK)	Result(AV)	Limit(PK)	Limit(AV)	Margin(PK)	Margin(AV)	Height	Angle	Polarity
MHz	dBuV	dBuV	dB	dBuV/m	dBuV/m	dBuV/m	dBuV/m	dB	dB	cm	deg	Hor/Ver
4727.50	36.6	23.6	12.31	48.91	35.91	80.0	60.0	31.09	24.09	100	347	H
4751.25	36.1	23.1	12.41	48.48	35.48	80.0	60.0	31.52	24.52	100	230	H
4830.00	36.2	23.2	12.75	48.98	35.98	80.0	60.0	31.02	24.02	100	195	H
1796.25	48.1	35.1	-1.35	46.74	33.74	80.0	60.0	33.26	26.26	100	185	V
1996.88	50.1	37.1	0.39	50.53	37.53	80.0	60.0	29.47	22.47	100	341	V
2393.13	49.1	36.1	1.78	50.92	37.92	80.0	60.0	29.08	22.08	100	290	V

-Continue

MODE : Rec mode (PoE)


(Above 1 GHz) / H

EUT/Model No.: QNO-6032R

Temp/Humi: 23 / 36

Test Mode : Rec mode (PoE)

Tested by: LEE G W

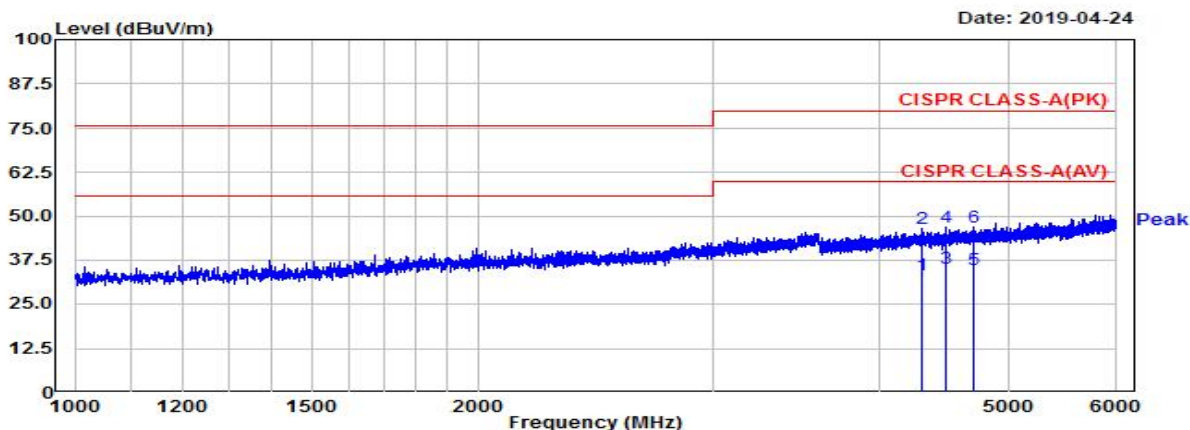


(Above 1 GHz) / V

EUT/Model No.: QNO-6032R

Temp/Humi: 23 / 36

Test Mode : Rec mode (PoE)

Tested by: LEE G W

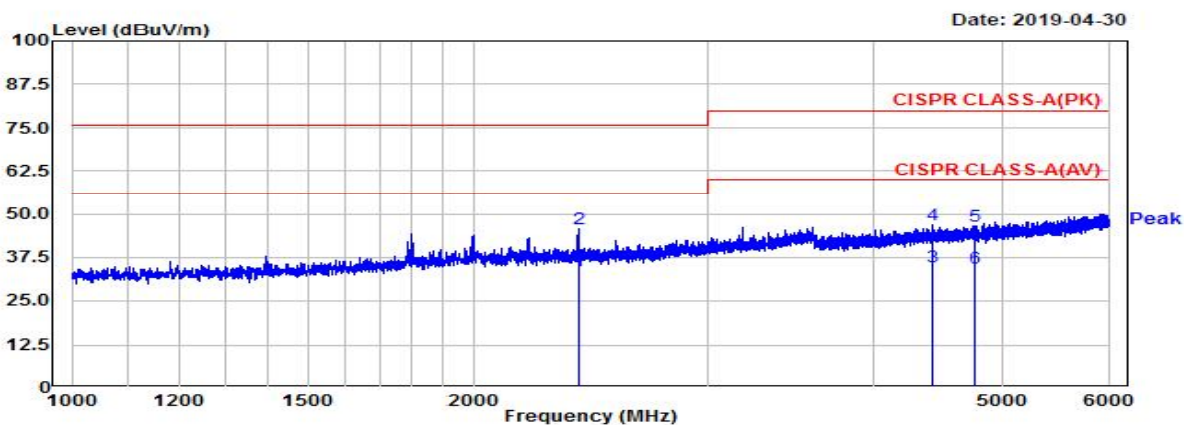

Manufacture : HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.

Test Date

Temp.:

Humidity:

Distance

Model : QNO-6032R

2019-04-24

23

36

3.8

TEST mode : Rec mode(PoE)

Freq.(MHz)	Reading(PK)	Reading(AV)	C.F	Result(PK)	Result(AV)	Limit(PK)	Limit(AV)	Margin(PK)	Margin(AV)	Height	Angle	Polarity
MHz	dBuV	dBuV	dB	dBuV/m	dBuV/m	dBuV/m	dBuV/m	dB	dB	cm	deg	Hor/Ver
4300.00	37.4	24.4	10.90	48.34	35.34	80.0	60.0	31.66	24.66	100	200	H
4478.75	37.6	25.6	11.38	49.00	37.00	80.0	60.0	31.00	23.00	100	188	H
4703.13	36.3	24.3	12.36	48.69	36.69	80.0	60.0	31.31	23.31	100	38	H
2397.50	46.0	34.0	1.80	47.79	35.79	76.0	56.0	28.21	20.21	100	42	V
4425.00	37.6	25.6	11.17	48.72	36.72	80.0	60.0	31.28	23.28	100	153	V
4766.25	36.1	24.1	12.48	48.53	36.53	80.0	60.0	31.47	23.47	100	119	V

Conclusions

Product models "**QNO-6032R**" meets all of the Class A requirements of the FCC Part 15, Subpart B. Limits of radio disturbance characteristics of ITE).


(Refer to Test Specification and Test Results in the "LTA certification", page 3 and 4)

- The highest internal source of an EUT is higher than 108 MHz, the measurement shall be made up to 6 GHz.



(The highest internal source of an EUT : higher than 108 MHz)

Photograph of the measurements


Photograph of the Conducted Disturbance Measurements / Rec mode (Adapter)

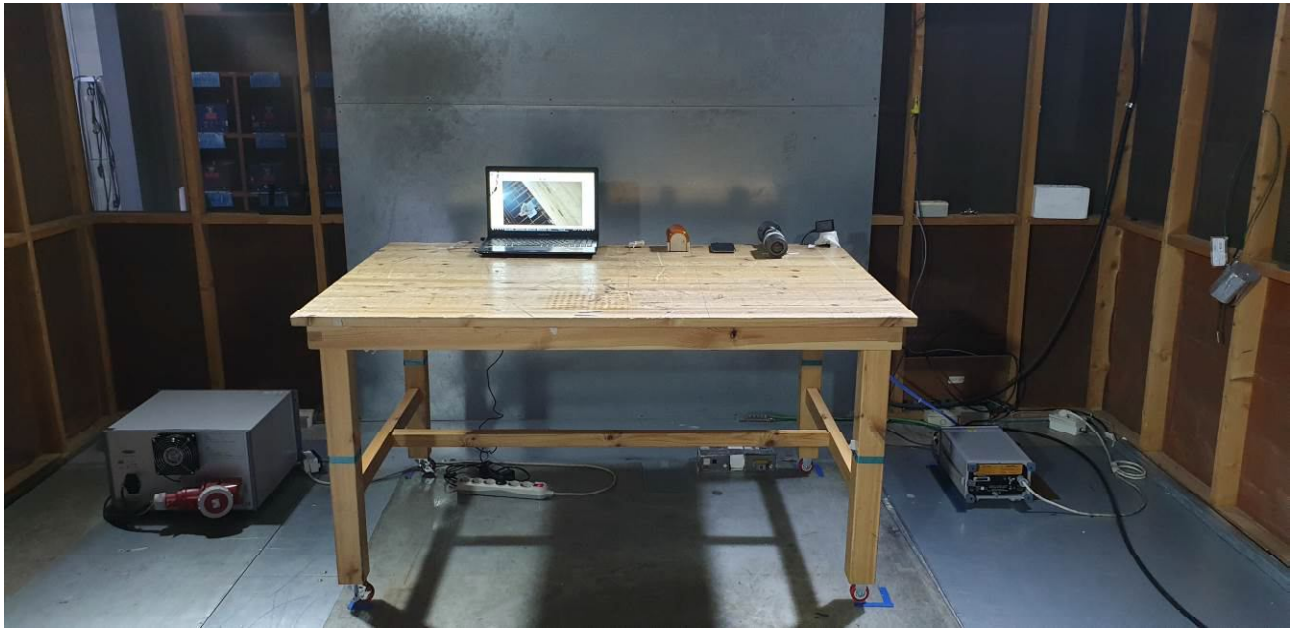



Photograph of the Radiated Disturbance Measurements (Below 1GHz) / Rec mode (Adapter)

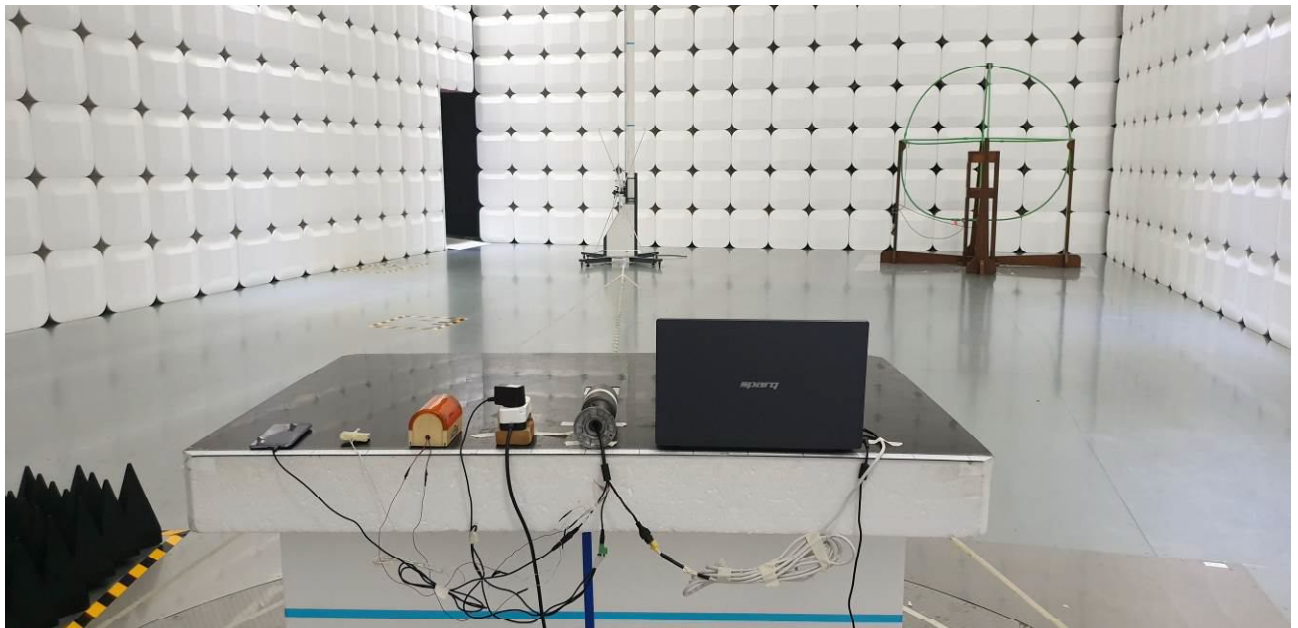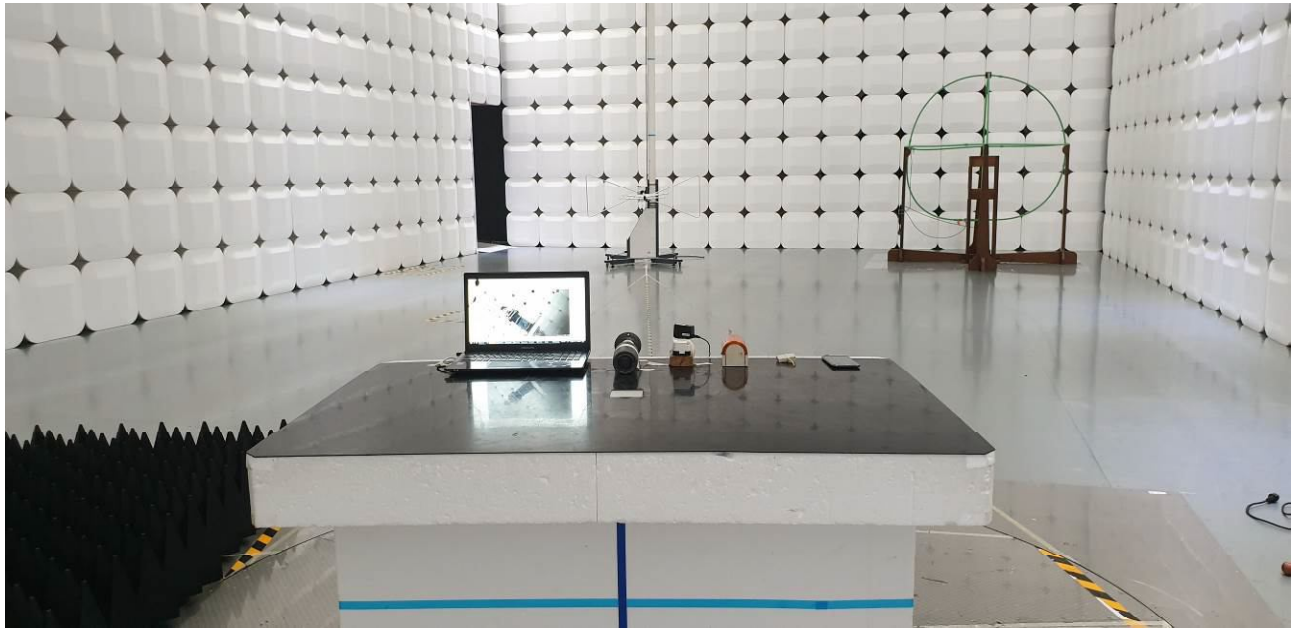



Photograph of the Radiated Disturbance Measurements (Below 1GHz) / Rec mode (PoE)

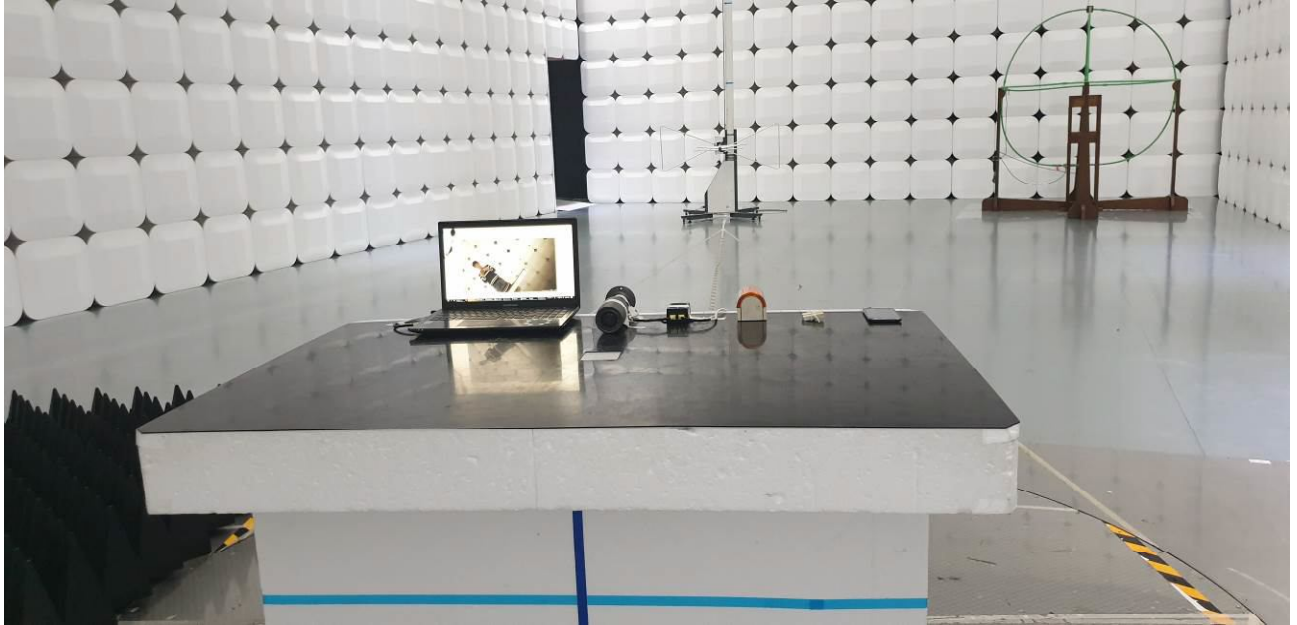

**Photograph of the Radiated Disturbance Measurements (Above 1GHz)
/ Rec mode (Adapter)**

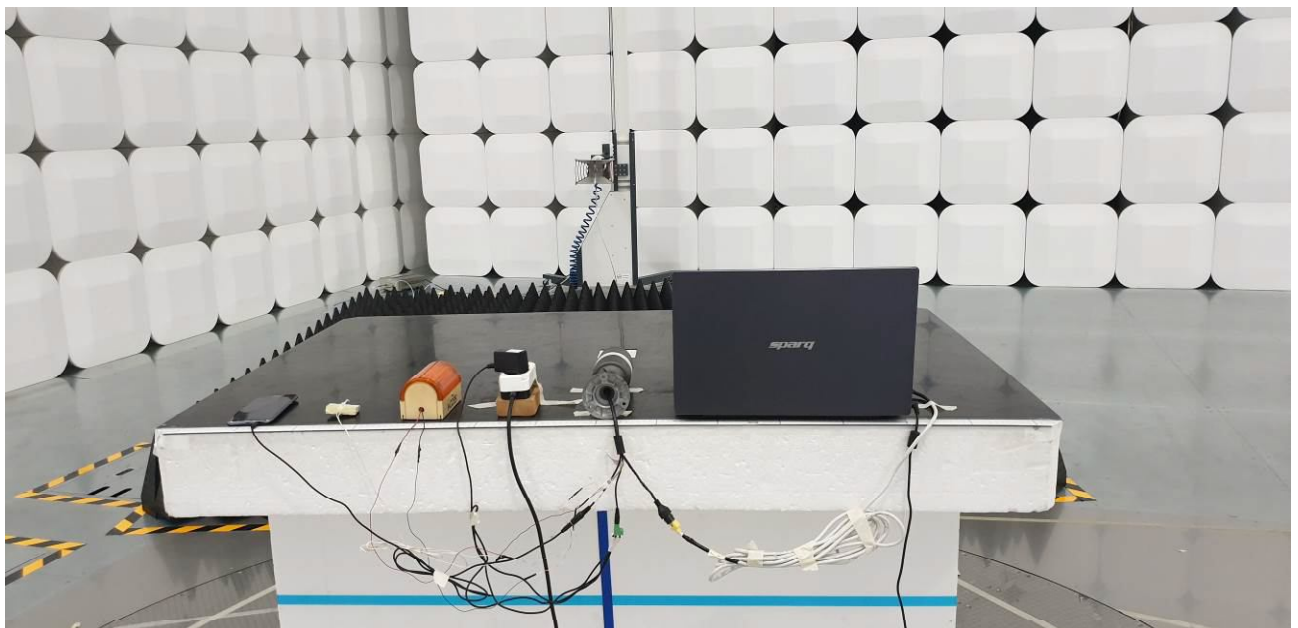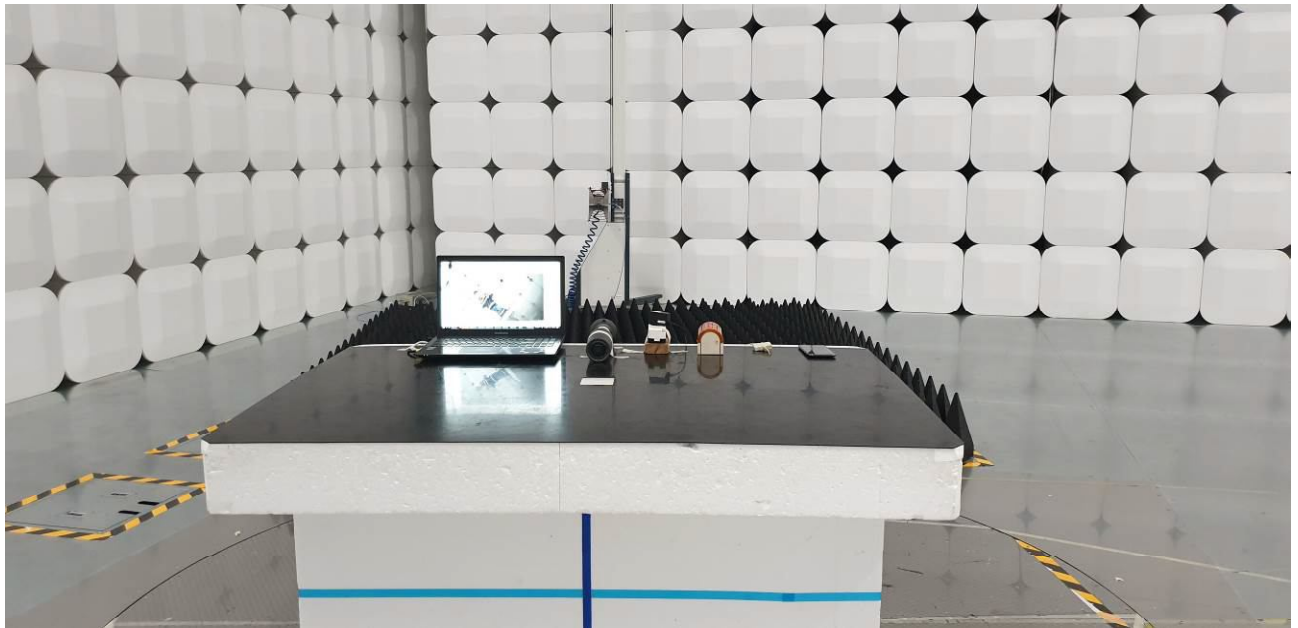

Photograph of the Radiated Disturbance Measurements (Above 1GHz) / Rec mode (PoE)

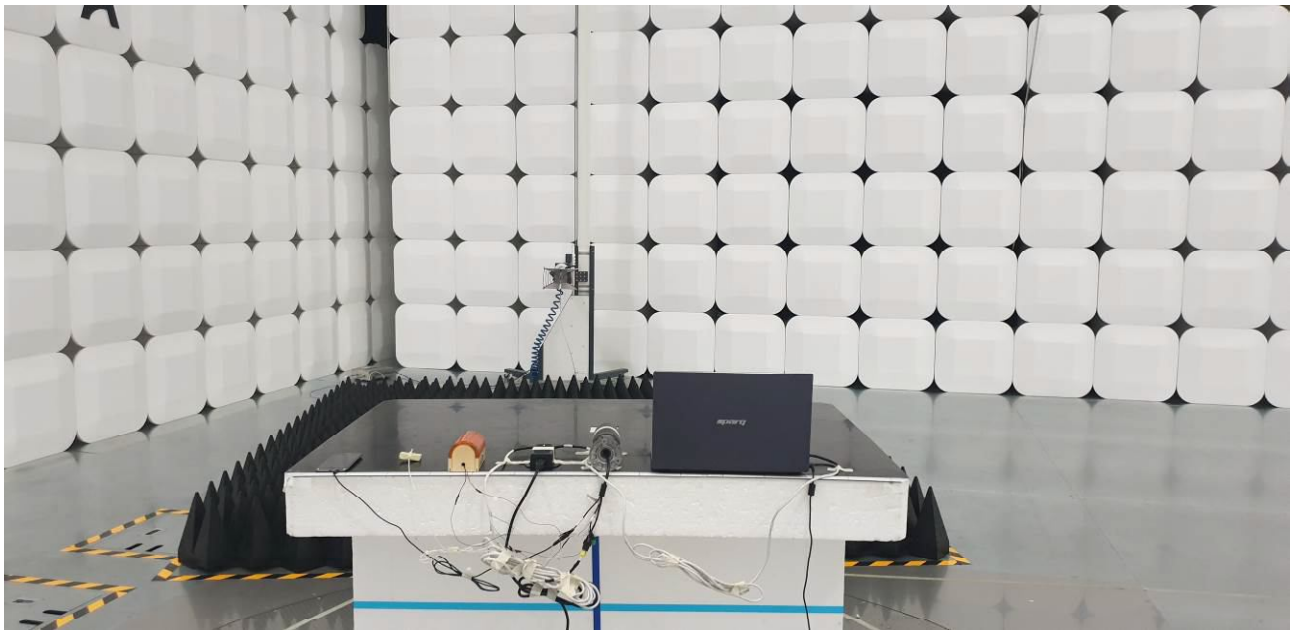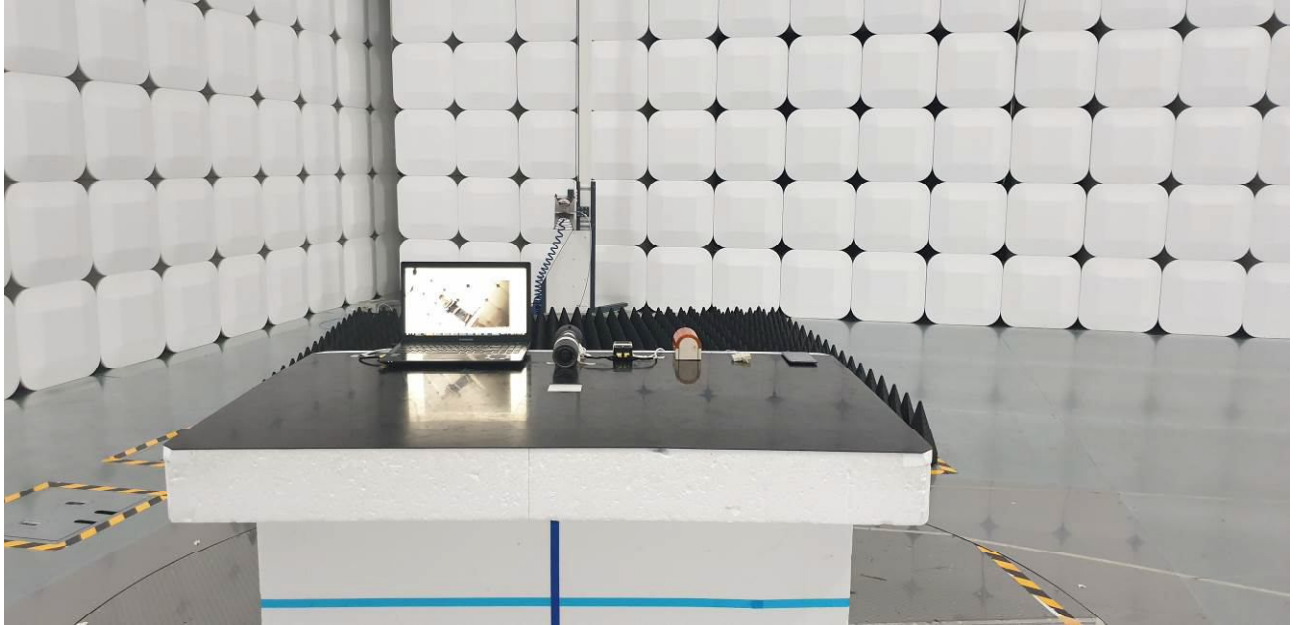

Photograph of the EUT

Photograph of the Equipment Under Test



Photograph of the Equipment Under Test

