



## EMC TEST REPORT For VCCI

Test Report No. : KES-E1-17T0820  
Date of Issue : Dec. 12, 2017  
Product name : Network Camera  
Model/Type No. : XNP-6320HSN  
Variant Model : -  
Applicant : Hanwha Techwin Co., Ltd.  
Applicant Address : 1204, Changwon-daero, Seongsan-gu, Changwon-si,  
Gyeongsangnam-do, Korea  
Manufacturer : Hanwha Techwin (Tianjin) Co., Ltd.  
Manufacturer Address : No.11 Weiliu Rd, Micro-Electronic Industrial  
Park, TEDA, Tianjin, 300385, People's Republic of China.  
  
Equipment authorization : ☐ Declaration of Conformity  
☒ Verification  
☐ Certification  
  
Date of Receipt : Nov. 22, 2017  
Test date : Dec. 04, 2017 ~ Dec. 05, 2017  
Test Results : ☒ In Compliance ☐ Not in Compliance

Tested by

Tae Yeon, Kim  
EMC Test Engineer

Reviewed by

Dong-Hun, Jang  
EMC Technical Manager

This test report is not related to KOLAS.

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-E1-17T0820  
Page (2) of (48)

## REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Dec. 12, 2017	KES-E1-17T0820	Issued

*This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document Sep be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.*

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



## TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency .....	7
1.2	Variant Model Differences.....	7
1.3	Device Modifications .....	7
1.4	Equipment Under Test.....	7
1.5	Support Equipments .....	8
1.6	External I/O Cabling .....	9
1.7	EUT Operating Mode(s) .....	10
1.8	Configuration.....	11
1.9	Remarks when standards applied .....	12
1.10	Calibration Details of Equipment Used for Measurement .....	12
1.11	Test Facility .....	12
1.12	Laboratory Accreditations and Listings .....	12
2.0	Test Regulations.....	13
2.1	Conducted Emissions Mains Power Ports.....	15
2.2	Conducted Emissions at Telecommunication Ports.....	16
2.3	Radiated Electric Field Emissions(Below 1 GHz) .....	17
2.4	Radiated Electric Field Emissions(Above 1 GHz) .....	18
APPENDIX A – TEST DATA.....		19
	Conducted Emissions at Mains Power Ports.....	19
	Conducted Emissions at Telecommunication Ports .....	21
	Radiated Electric Field Emissions(Below 1 GHz) .....	25
	Radiated Electric Field Emissions(Above 1 GHz) .....	27
	Test Setup Photos and Configuration .....	35
	Conducted Voltage Emissions .....	35
	Conducted Telecommunication Emissions .....	36
	adiated Electric Field Emissions(Below 1 GHz) .....	37
	Radiated Electric Field Emissions(Above 1 GHz) .....	38
	EUT External Photographs .....	39
	EUT Internal Photographs .....	40



## 1.0 General Product Description

Main Specifications of EUT are:

	XNP-6320HS
<b>Video</b>	
Imaging Device	1/2.8" 2.4M CMOS
Total Pixels	1981(H) x 1288(V), 2.55M
Effective Pixels	1944(H) x 1212(V), 2.35M
Scanning System	Progressive
Min. Illumination	Color : 0.05Lux (1/30sec, F1.6) B/W : 0.005 Lux (1/30sec, F1.6)
S / N Ratio	50dB
Video Out	CVBS : 1.0 Vp-p / 75 $\Omega$ composite, 720x480(N), 720x576(P), for installation USB : Micro USB type B, 1280x720, for installation
<b>Lens</b>	
Focal Length (Zoom Ratio)	4.44 ~ 142.6mm(Optical 32X)
Max. Aperture Ratio	F1.6 (Wide) / F4.4 (Tele)
Angular Field of View	H : 61.8°(Wide) ~ 2.19°(Tele) / V : 36.2°(Wide) ~ 1.24°(Tele)
Min. Object Distance	Wide 1.5m, Tele 2m
Focus Control	Auto / Manual / One shot AF
Lens Type	DC Auto Iris
Mount Type	Board-in type
<b>Pan/Tilt/Rotate</b>	
Pan Range	360° Endless
Pan Speed	Preset : 700°/sec, Manual : 0.024°/sec ~ 200°/sec
Tilt Range	210°(-15° ~ 195°)
Tilt Speed	Preset : 700°/sec, Manual : 0.024°/sec ~ 200°/sec
Sequence	Preset (300 ea), Swing, Group (6 ea), Trace, Tour (1 ea), Auto Run, Schedule
Preset Accuracy	±0.2°
Azimuth	Yes (E/W/S/N/NE/NW/SE/SW)
Auto Tracking	Support
<b>Operational</b>	
Camera Title	Off / On (Displayed up to 85 characters) - W/W : English/Numeric/Special Characters - China : English/Numeric/Special/Chinese Characters - Common : Multi-line (Max 5), Color (Grey/Green/Red/Blue/Black/White), Transparency, Auto Scale by
Day & Night	Auto (ICR) / Color / B/W / Schedule
Backlight Compensation	Off / BLC / HLC / WDR
Wide Dynamic Range	150dB
Contrast Enhancement	SSDR (Off / On)
Digital Noise Reduction	SSNR5 (2D+3D Noise Filter) (Off / On)
Digital Image Stabilization	Off / On (built-in Gyro)
Defog	Auto/Manual/Off
Motion Detection	Off / On(8ea, Polygonal)
Privacy Masking	Off / On ( 24 Zones of Rectangle zone) - Color : Grey/Green/Red/Blue/Black/White - Zoom ratio option for mask mode - Mosaic option
Gain Control	Off / Low / Middle / High
White Balance	TW / AWC / Manual / Indoor / Outdoor (included Mercury & Sodium)
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (1 ~ 1/12,000sec)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



# KES Co., Ltd.

C-3701, Simin-daero 365-40,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-E1-17T0820  
Page (5) of (48)

Image Rotation	Flip/Mirror : On/Off
Video&Audio Analytics	Tampering, Loitering, Directional Detection, Fog Detection, Virtual Line, Enter/Exit, Appear / Disappear, Audio Detection, Face Detection, Motion Detection, Sound Classification
Serial Interface	RS-485 - Samsung-T, Pelco-D/P, Panasonic, Bosch, AD, GE, Vicon, Honeywell
Alarm I/O	Input 4ea / Output 2ea (Relay)
Alarm Triggers	Alarm input, Motion Detection, Video & Audio Analytics, Network Disconnect
Alarm events	File upload via FTP and E-Mail Notification via E-Mail, TCP and HTTP local storage(SD/SDHC/SDXC) or NAS recording at Alarm Triggers External output Preset
Audio In	Selectable (Mic IN/Line IN) Supply voltage: 2.5VDC(4mA), Input impedance: approx. 2K Ohm
Audio out	Line out (3.5mm mono jack), Max output level: 1 Vrms
Pixel counter	support
<b>Network</b>	
Ethernet	RJ-45 (10/100BASE-T)
Video Compression Format	H.264 (MPEG-4 Part 10/AVC), H.265, Motion JPEG
Resolution	1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240
Max. Framerate	H.264/H.265 : Max 60fps at all resolutions Motion JPEG : Max. 30fps at all resolutions
Smart Codec	Manual mode (Area-Based : Sea)
WiseStream-II	support
Video Quality Adjustment	H.264 / H.265 / MJPEG : Target Bitrate Level Control
Bitrate Control Method	H.264 / H.265 : CBR or VBR Motion JPEG : VBR
Streaming Capability	Multiple Streaming (Up to 10 Profiles)
Audio Compression Format	G.711 u-law /G.726 Selectable G.726 (ADPCM) 8KHz, G.711 8KHz G.726 : 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC : 48Kbps at 16KHz
Audio Communication	Bi-directional (2-Way)
IP	IPv4, IPv6
Protocol	TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



# KES Co., Ltd.

C-3701, Simin-daero 365-40,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-EI-17T0820  
Page (6) of (48)

Security	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access Log 802.1X Authentication (EAP-TLS, EAP-LEAP)
Streaming Method	Unicast / Multicast
Max. User Access	20 users at Unicast Mode
Edge Storage	Micro SD/SDHC/SDXC 2slot (up to 512 GB) - Continuous recording(1'st slot to 2'nd slot) - Motion Images recorded in the Micro SD/SDHC/SDXC memory card can be downloaded. NAS(Network Attached Storage) Local PC for Instant Recording
Application Programming	ONVIF Profile S/G SUNAPI 2.0(HTTP API) Wisenet Open Platform
Webpage Language	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek
Web Viewer	Supported OS : Windows 7, 8.1, 10, Mac OS X 10.10. 10.11 10.12 Plug-in Free Webviewer Supported Browser : Google Chrome, MS Edge, Mozilla Firefox(Window 64bit only) , Apple Safari 10 (Mac OS X only) Plug-in Webviewer Supported Browser : MS Explore 11, Apple Safari 10 (Mac OS X only)
Central Management Software	SmartViewer
<b>Environmental</b>	
Operating Temperature / Humidity	24V AC: -50°C ~ +55°C (-58°F ~ +131°F) / ~ 90% RH * Start up should be done at above -40°C
	PoE+ : -35°C ~ +55°C (-31°F ~ +131°F) / ~ 90% RH * Start up should be done at above -25°C
Storage Temperature / Humidity	-30°C ~ +60°C (-22°F ~ +140°F) / Less than 90% RH
Ingress Protection	IP66/IP67, NEMA4X
Vandal Resistance	IK10
<b>Electrical</b>	
Input Voltage / Current	AC24V±10%,PoE+(IEEE802.3at,Class4)
Power Consumption	24W Max(Heater Off), 65W Max(Heater On, AC24V)
<b>Mechanical</b>	
Color / Material	SUS316L
Dimension (WxH)	Φ227*296H
Weight	5.3Kg

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



## 1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 230 Vac ☐ 100 Vac ☒ 24 Vac ☐ 5 Vdc ☒ PoE

Frequency ☐ 50 Hz ☐ 60 Hz ☐ Hz

## 1.2 Variant Model Differences

Not applicable

## 1.3 Device Modifications

Not applicable

## 1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
Network Camera	XNP-6320HSN	-	Hanwha Techwin (Tianjin) Co.,Ltd	E.U.T

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-EI-17T0820  
Page (8) of (48)

## 1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
PoE Adaptor	GS728TPP	-	NETGEAR, INC.	-
Notebook	X56K	HN11N5151FJ0045W	Hansung computer co., Ltd.	-
Notebook Adaptor	PA-1900-14	-	LITE-ON TECHNOLOGY (CHANGZHOU)CO., LTD.	-
Speaker	BR10000A CUVE	-	BEIJING EDIFIER HI-TECH GROUP.	-
MIC	CMK-303	-	CAMAC	-
Alarm	SIP-1201DD D0	-	SAMSUNG TECHWIN CO., LTD.	-
Controller	SPC-1010	C50E67WG10100F	SamSung Techwin Co.,Ltd.	-
Controller Adaptor	RS-AB1000	-	Dongguan Jinhuaasheng Power Technology Co.,Ltd.	-
Micro SD Card	-	-	SanDisk	32 GB

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



## 1.6 External I/O Cabling

### ■ AC 24 V Mode

Start		END		Cable Spec.	
Description	I / O Port	Description	I / O Port	Length	Shield
Network Camera (E.U.T)	RJ-45	Notebook	RJ-45	3.0	U
	3.5 mm	Speaker	3.5 mm	1.6	U
	3.5 mm	MIC	3.5 mm	1.7	U
	3 Pin	Alarm	3 Pin	4.0	U
	RS-485 (3 Pin)	Controller	RS-485 (3 Pin)	3.5	U
	SLOT	Micro SD Card	SLOT	-	-

\* Unshielded=U, Shielded=S

### ■ PoE Mode

Start		END		Cable Spec.	
Description	I / O Port	Description	I / O Port	Length	Shield
Network Camera (E.U.T)	RJ-45 (PoE)	PoE Adaptor	RJ-45 (PoE)	3.0	U
	3.5 mm	Speaker	3.5 mm	1.6	U
	3.5 mm	MIC	3.5 mm	1.7	U
	3 Pin	Alarm	3 Pin	4.0	U
	RS-485 (3 Pin)	Controller	RS-485 (3 Pin)	3.5	U
	SLOT	Micro SD Card	SLOT	-	-
PoE Adaptor	RJ-45 (Data)	Notebook	RJ-45 (Data)	3.0	U

\* Unshielded=U, Shielded=S



## KES Co., Ltd.

C-3701, Simin-daero 365-40,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-E1-17T0820  
Page (10) of (48)

### 1.7 EUT Operating Mode(s)

Test mode	operating
AC 24 V	E.U.T Monitoring, Ping Test
PoE	


E.U.T Test operating S/W		
Name	Version	Manufacture Company
Webviewer	-	Hanwha Techwin Co., Ltd.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


## 1.8 Configuration

■ AC Main  
□ DC Main

### ■ AC 24 V Mode

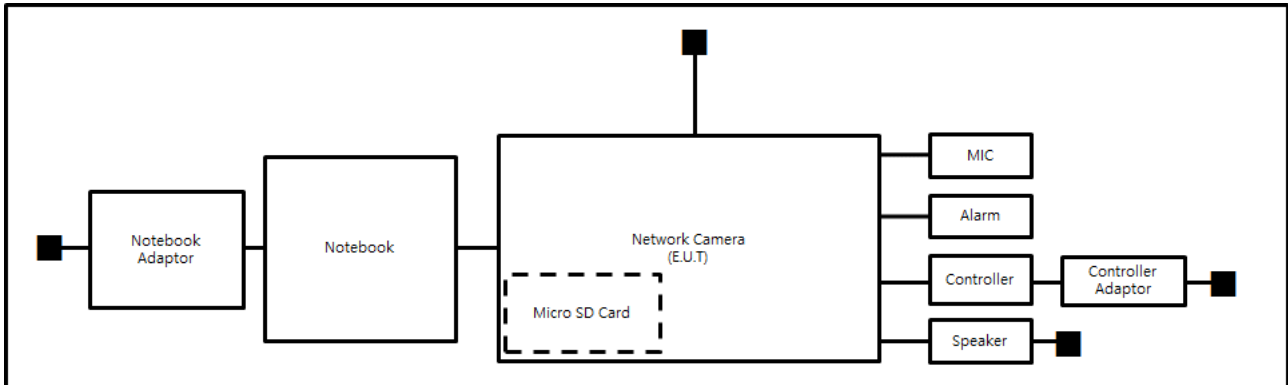

### ■ PoE Mode

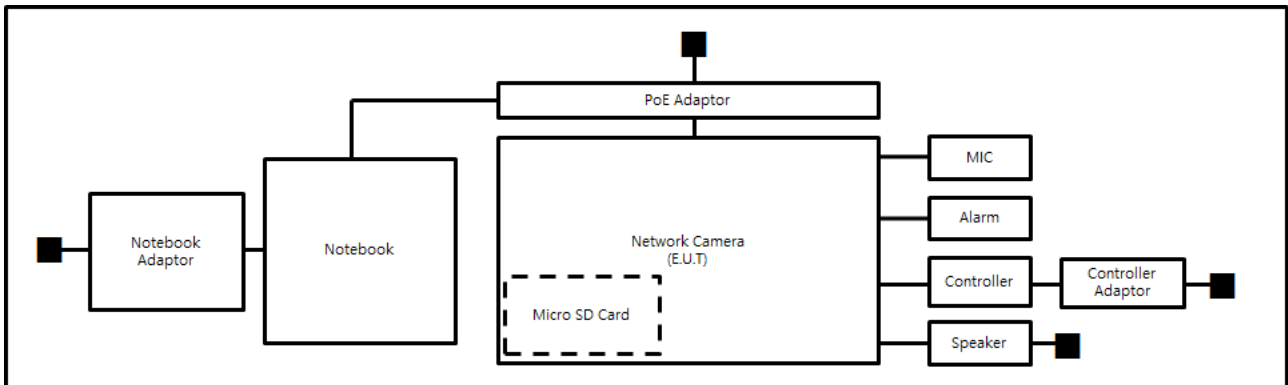

## 1.9 Remarks when standards applied

- N/A







## 1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

## 1.11 Test Facility

The measurement facility is located at 473-21 Gayeo-ro, Yeoju-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22.

## 1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3 & 10 meter Open Area Test Sites and one conducted site to perform FCC Part 15/18 measurements.	
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-4308, C-4798, T-2311, G-914
KOREA	MSIP	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
Canada	IC	3 & 10 meter Open Area Test Sites and one conducted site	 4769B-1
Europe	CE	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	
International	KOLAS	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

## 2.0 Test Regulations

The emissions tests were performed according to following regulations:

☐ EMC – Directive 2014/30/EU

☐ EN 61000-6-3: 2011

☐ EN 61000-6-1: 2007

☐ EN 61000-6-4: 2007 +A1: 2011

☐ EN 61000-6-2: 2005

☐ EN 55011: 2007 +A1: 2010

☐ Group 1  
☐ Class A

☐ Group 2  
☐ Class B

☐ EN 55014-1: 2006 +A2: 2011

☐ EN 55014-2: 1997 +A2: 2008

☐ EN 55015: 2013

☐ EN 61547 : 2009

☐ EN 55032: 2015

☐ Class A

☐ Class B

☐ EN 55024: 2010 +A1: 2015

☐ EN 50130-4: 2011 +A1: 2014

☐ EN 61000-3-2: 2014

☐ EN 61000-3-3: 2013

☐ EN 61326-1: 2013



**KES Co., Ltd.**

C-3701, Simin-daero 365-40,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-E1-17T0820  
Page (14) of (48)

- 
- |  |   |                                  |
|--|---|----------------------------------|
| <input checked="" type="checkbox"/> VCCI V-3 / 2015.04 | <input checked="" type="checkbox"/> Class A | <input type="checkbox"/> Class B |
| <input type="checkbox"/> AS/NZS CISPR22:2009 +A1:2010  | <input type="checkbox"/> Class A            | <input type="checkbox"/> Class B |
| <input type="checkbox"/> 47 CFR Part 15, Subpart B     |   |                                  |
| <input type="checkbox"/> CISPR 22: 2009 +A1: 2010      | <input type="checkbox"/> Class A            | <input type="checkbox"/> Class B |
| <input type="checkbox"/> ANSI C63.4-2009               |   |                                  |
| <input type="checkbox"/> IC Regulation ICES-003 : 2016 |   |                                  |
| <input type="checkbox"/> CAN/CSA CISPR 22-10           | <input type="checkbox"/> Class A            | <input type="checkbox"/> Class B |
| <input type="checkbox"/> ANSI C63.4-2014               |   |                                  |
|  |   |                                  |
| <input type="checkbox"/> RE- Directive 2014/53/EU      |   |                                  |
|  |   |                                  |
| <input type="checkbox"/> EN 301 489-1 V1.9.2           |   |                                  |
| <input type="checkbox"/> Equipment for fixed use       |   |                                  |
| <input type="checkbox"/> Equipment for vehicular use   |   |                                  |
| <input type="checkbox"/> Equipment for portable use    |   |                                  |
| <input type="checkbox"/> EN 301 489-3 V1.6.1           |   |                                  |
| <input type="checkbox"/> EN 301 489-17 V2.2.1          |   |                                  |
| <input type="checkbox"/> EN 60945: 2002                |   |                                  |

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

## 2.1 Conducted Emissions Mains Power Ports

Test Date  
Dec. 04, 2017Test Location  
Electro wave Shieldroom

### Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EMC32	R & S	9.12.00	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESR3	R & S	101781	04, 27, 2018
<input checked="" type="checkbox"/>	LISN	ENV216	R & S	101787	01, 11, 2018
<input checked="" type="checkbox"/>	LISN	ESH2-Z5	R & S	100450	04, 27, 2018
<input checked="" type="checkbox"/>	PULSE LIMITER	ESH3-Z2	R & S	101915	11, 27, 2018
<input type="checkbox"/>	LISN	NNBM8124	SCHWARZBECK	8124-1002	08, 07, 2018
<input type="checkbox"/>	LISN	NNBM8124	SCHWARZBECK	8124-1003	08, 07, 2018

Test Conditions  
Temperature: 22,0 °C  
Relative Humidity: 43,0 % R.H.Frequency Range of Measurement  
150 kHz to 30 MHzInstrument Settings  
IF Band Width: 9 kHzTest Results  
The requirements are:☒ PASS  
☐ NOT PASS  
☐ NOT APPLICABLERemarks  
See Appendix A for test data.

## 2.2 Conducted Emissions at Telecommunication Ports

Test Date  
Dec. 04, 2017

Test Location  
Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EMC32	R & S	9.12.00	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESR3	R & S	101781	04, 27, 2018
<input checked="" type="checkbox"/>	LISN	ENV216	R & S	101787	01, 11, 2018
<input checked="" type="checkbox"/>	LISN	ESH2-Z5	R & S	100450	04, 27, 2018
<input checked="" type="checkbox"/>	PULSE LIMITER	ESH3-Z2	R & S	101915	11, 27, 2018
<input checked="" type="checkbox"/>	8-WIRE ISN CAT3,5	ENY81	R & S	100174	01, 11, 2018
<input type="checkbox"/>	8-WIRE ISN CAT6	ENY81-CAT6	R & S	101665	01, 11, 2018
<input type="checkbox"/>	ISN	ISN S8	SCHWARZBECK	ISN-S8-0019	05, 12, 2018
<input type="checkbox"/>	CDN	CDNS502A	TESEQ	40431	01, 11, 2018

Test Conditions  
Temperature: 22,0 °C  
Relative Humidity: 43,0 % R.H.

Frequency Range of Measurement  
150 kHz to 30 MHz

Instrument Settings  
IF Band Width: 9 kHz

Test Results  
The requirements are:

☒ PASS  
☐ NOT PASS  
☐ NOT APPLICABLE

Remarks  
See Appendix A for test data.





## 2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date  
Dec. 04, 2017

Test Location  
☐ OPEN AREA TEST SITE #2      ☒ SEMI ANECHOIC CHAMBER #4(10m)

### Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESU26	R & S	100551	04, 18, 2018
<input checked="" type="checkbox"/>	AMPLIFIER	SCU 01	R & S	100603	11, 27, 2018
<input checked="" type="checkbox"/>	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	716	11, 28, 2018

Test Conditions  
Temperature: 22,7 °C  
Relative Humidity: 41,3 % R.H.

Frequency Range of Measurement  
30 MHz to 1 GHz

Instrument Settings  
IF Band Width: 120 kHz

Test Results  
The requirements are:

☒ PASS  
☐ NOT PASS  
☐ NOT APPLICABLE

Remarks  
See Appendix A for test data.

## 2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Dec. 05, 2017

Test Location

SEMI ANECHOIC CHAMBER #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	e3	AUDIX	8.083b	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESU26	R & S	100552	04, 19, 2018
<input checked="" type="checkbox"/>	PREAMPLIFIER	8449B	AGILENT	3008A01729	05, 31, 2018
<input type="checkbox"/>	ATTENUATOR	8491A	HP	35496	03, 24, 2018
<input type="checkbox"/>	LOG-PERIODIC ANTENNA	STLP 9149	SCHWARZBECK	9149-255	05, 17, 2018
<input checked="" type="checkbox"/>	HORN ANTENNA	BBHA 9120D	SCHWARZBECK	9120D-1802	09, 04, 2018

Test Conditions

Temperature: 20,5 °C

Relative Humidity: 45,2 % R.H.

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS  
☐ NOT PASS  
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

## APPENDIX A – TEST DATA

### Conducted Emissions at Mains Power Ports


■ AC 24 V Mode

HOT LINE

### Common Information

Test Description:  
Model No.:  
Mode  
Operator Name:

Conducted Emission  
XNP-6320HSN  
AC\_H  
KES

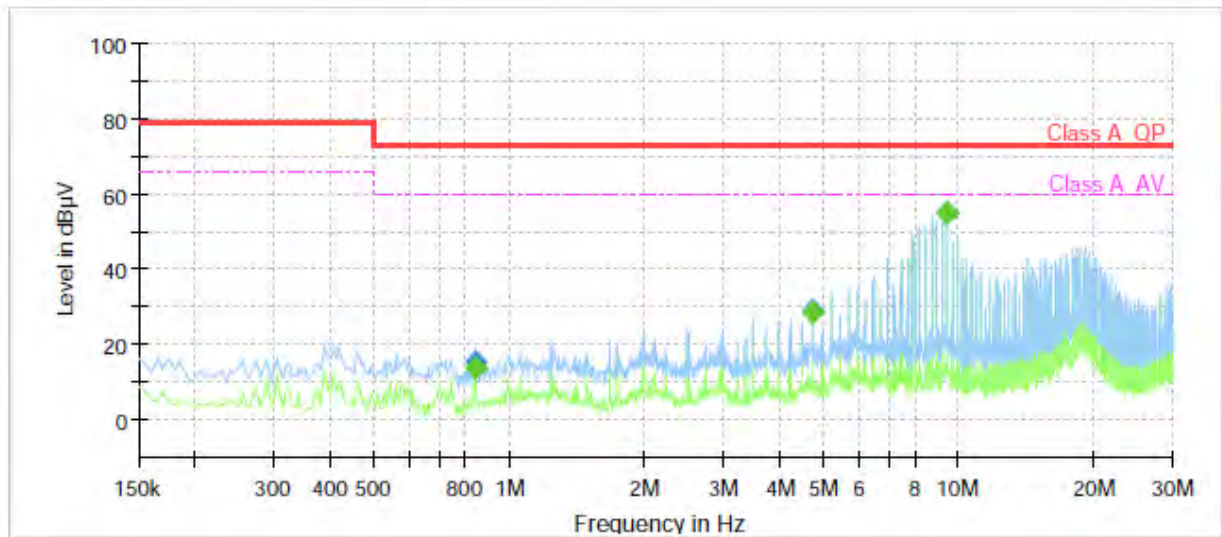


### Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.840000	---	13.96	60.00	46.04	1000.0	9.000	L1	20.0
0.840000	15.23	---	73.00	57.77	1000.0	9.000	L1	20.0
4.725000	---	28.40	60.00	31.60	1000.0	9.000	L1	19.8
4.725000	29.08	---	73.00	43.92	1000.0	9.000	L1	19.8
9.445000	---	54.91	60.00	5.09	1000.0	9.000	L1	20.0
9.445000	55.09	---	73.00	17.91	1000.0	9.000	L1	20.0

## NEUTRAL LINE

### Common Information

Test Description:	Conducted Emission
Model No.:	XNP-6320HSN
Mode	AC_N
Operator Name:	KES

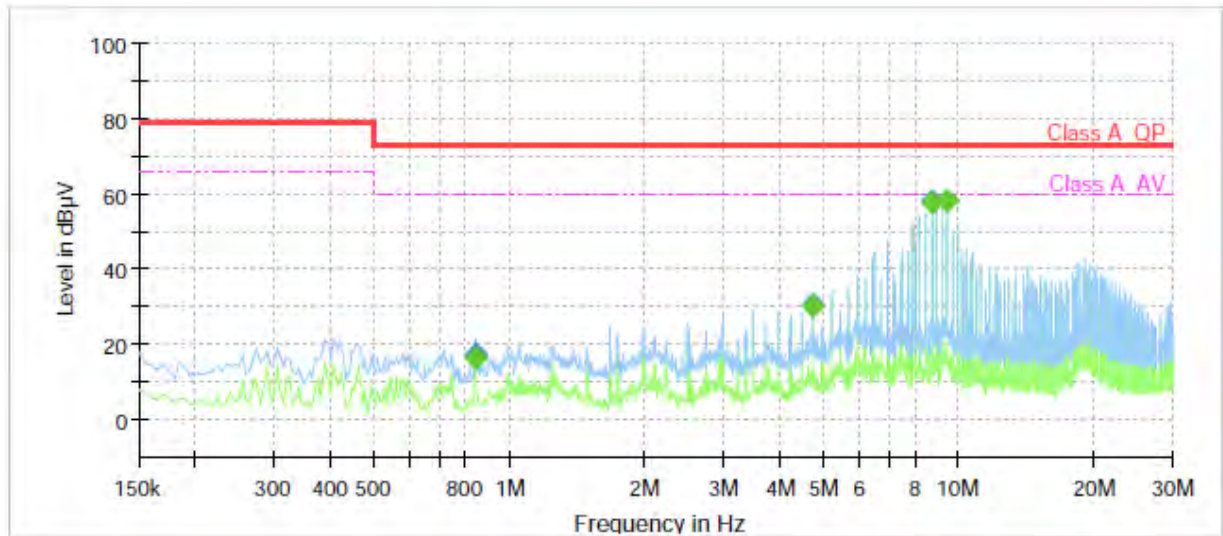

### Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.840000	---	16.65	60.00	43.35	1000.0	9.000	N	20.0
0.840000	17.73	---	73.00	55.27	1000.0	9.000	N	20.0
4.725000	---	30.07	60.00	29.93	1000.0	9.000	N	19.8
4.725000	30.75	---	73.00	42.25	1000.0	9.000	N	19.8
8.700000	---	57.90	60.00	2.10	1000.0	9.000	N	19.9
8.700000	58.14	---	73.00	14.86	1000.0	9.000	N	19.9
9.445000	---	57.99	60.00	2.01	1000.0	9.000	N	20.0
9.445000	58.27	---	73.00	14.73	1000.0	9.000	N	20.0

#### ◆ Calculation

QuasiPeak [dBuV] / CAverage [dBuV] = Reading Value [dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.


Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

## Conducted Emissions at Telecommunication Ports

■ AC 24 V Mode  
[10 Mbps]

### Common Information

Test Description:	Telecommunication Emission
Model No.:	XNP-6320HSN
Mode	AC_10 Mbps
Operator Name:	KES

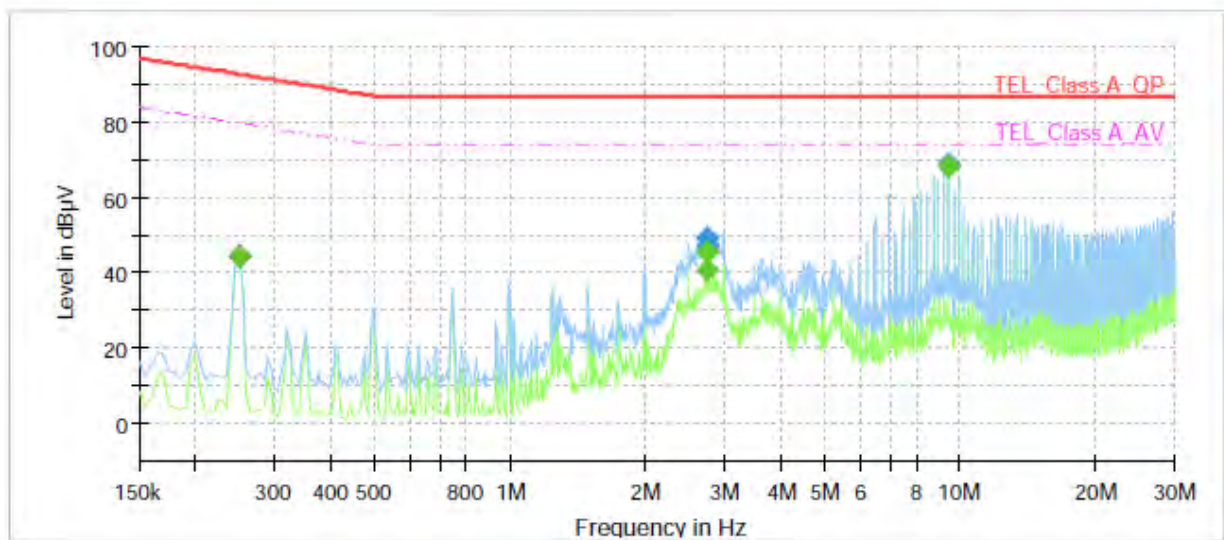

### Final Result


Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.250000	---	44.72	79.76	35.04	1000.0	9.000	Single Line	19.6
0.250000	44.68	---	92.76	48.08	1000.0	9.000	Single Line	19.6
2.730000	---	40.57	74.00	33.43	1000.0	9.000	Single Line	19.9
2.730000	47.04	---	87.00	39.96	1000.0	9.000	Single Line	19.9
2.735000	---	45.32	74.00	28.68	1000.0	9.000	Single Line	19.9
2.735000	49.17	---	87.00	37.83	1000.0	9.000	Single Line	19.9
9.445000	---	68.19	74.00	5.81	1000.0	9.000	Single Line	19.7
9.445000	68.69	---	87.00	18.31	1000.0	9.000	Single Line	19.7



[100 Mbps]

## Common Information

Test Description:	Telecommunication Emission
Model No.:	XNP-6320HSN
Mode	AC_100 Mbps
Operator Name:	KES

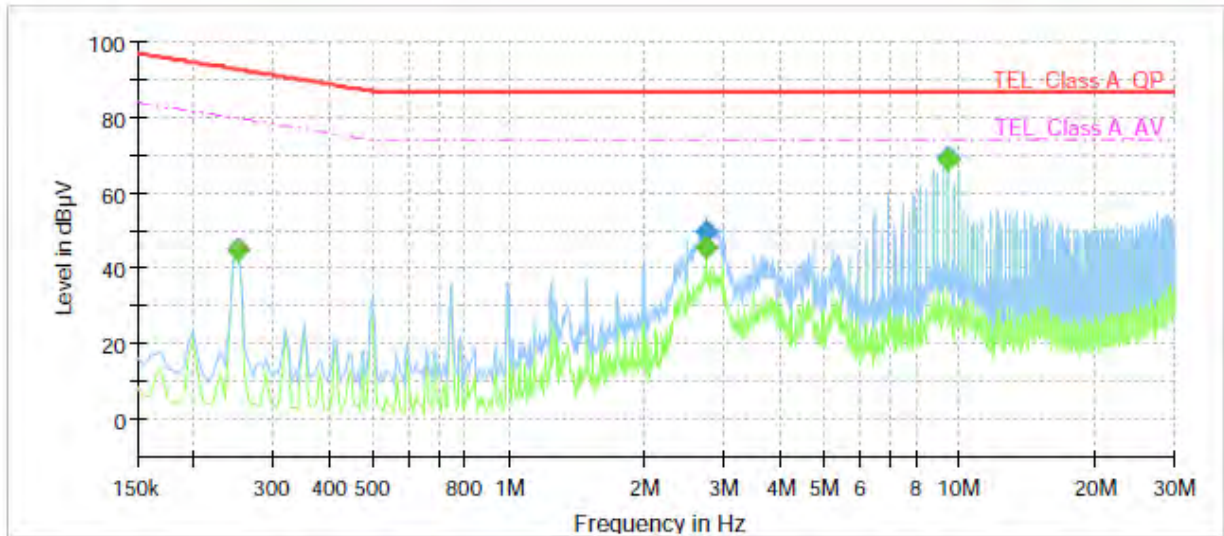


## Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.250000	---	45.18	79.76	34.58	1000.0	9.000	Single Line	19.9
0.250000	45.15	---	92.76	47.61	1000.0	9.000	Single Line	19.9
2.735000	---	45.48	74.00	28.52	1000.0	9.000	Single Line	20.2
2.735000	49.74	---	87.00	37.26	1000.0	9.000	Single Line	20.2
9.445000	---	68.68	74.00	5.32	1000.0	9.000	Single Line	20.0
9.445000	69.12	---	87.00	17.88	1000.0	9.000	Single Line	20.0

■ PoE Mode  
[10 Mbps]

## Common Information

Test Description:	Telecommunication Emission
Model No.:	XNP-6320HSN
Mode	PoE_10 Mbps
Operator Name:	KES

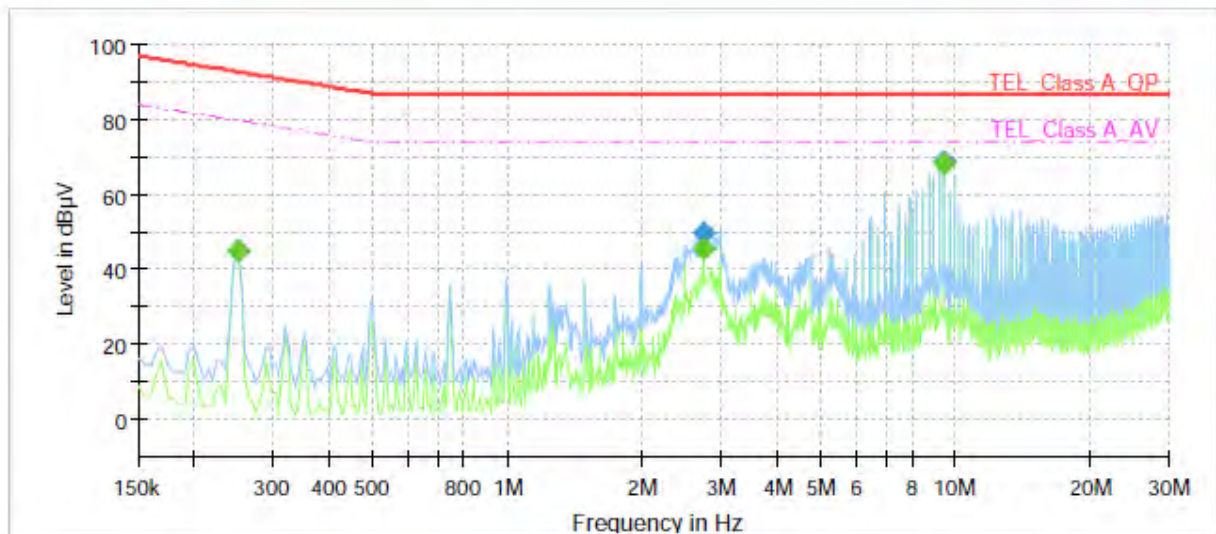


## Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.250000	---	44.82	79.76	34.94	1000.0	9.000	Single Line	19.6
0.250000	44.78	---	92.76	47.98	1000.0	9.000	Single Line	19.6
2.735000	---	45.45	74.00	28.55	1000.0	9.000	Single Line	19.9
2.735000	49.65	---	87.00	37.35	1000.0	9.000	Single Line	19.9
9.445000	---	68.51	74.00	5.49	1000.0	9.000	Single Line	19.7
9.445000	68.92	---	87.00	18.08	1000.0	9.000	Single Line	19.7

[100 Mbps]

## Common Information

Test Description:	Telecommunication Emission
Model No.:	XNP-6320HSN
Mode	PoE_100 Mbps
Operator Name:	KES

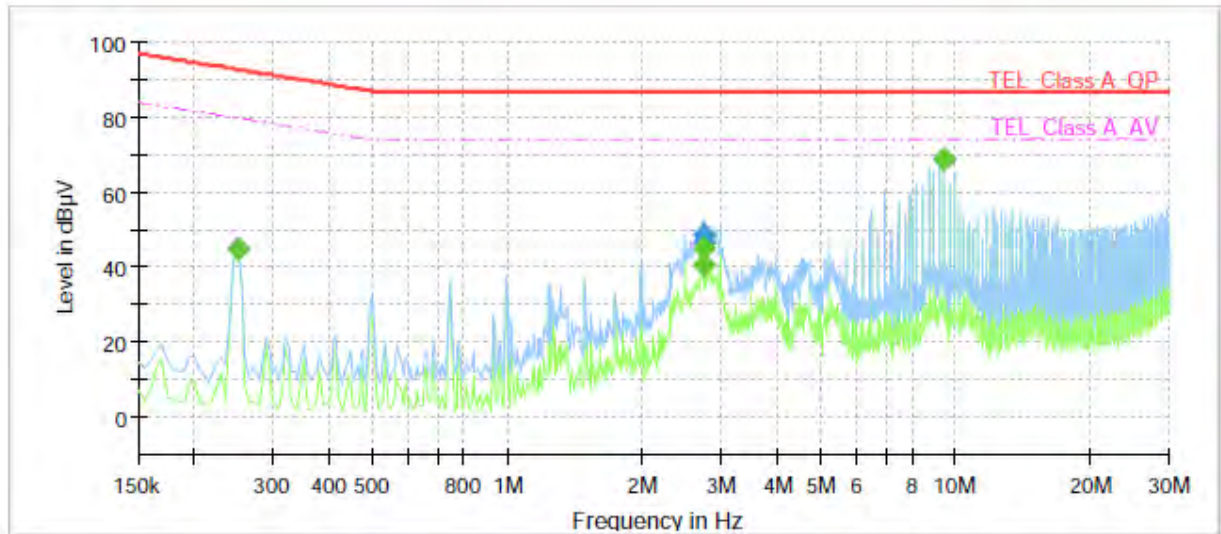

## Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.250000	---	45.21	79.76	34.55	1000.0	9.000	Single Line	19.9
0.250000	45.18	---	92.76	47.58	1000.0	9.000	Single Line	19.9
2.730000	---	40.74	74.00	33.26	1000.0	9.000	Single Line	20.2
2.730000	46.81	---	87.00	40.19	1000.0	9.000	Single Line	20.2
2.735000	---	45.20	74.00	28.80	1000.0	9.000	Single Line	20.2
2.735000	48.84	---	87.00	38.16	1000.0	9.000	Single Line	20.2
9.445000	---	68.56	74.00	5.44	1000.0	9.000	Single Line	20.0
9.445000	69.04	---	87.00	17.96	1000.0	9.000	Single Line	20.0

### ◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))





## KES Co., Ltd.

C-3701, Simin-daero 365-40,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr


Test report No.:

KES-E1-17T0820

Page (25) of (48)

### Radiated Electric Field Emissions(Below 1 GHz)

#### ■ AC 24 V Mode

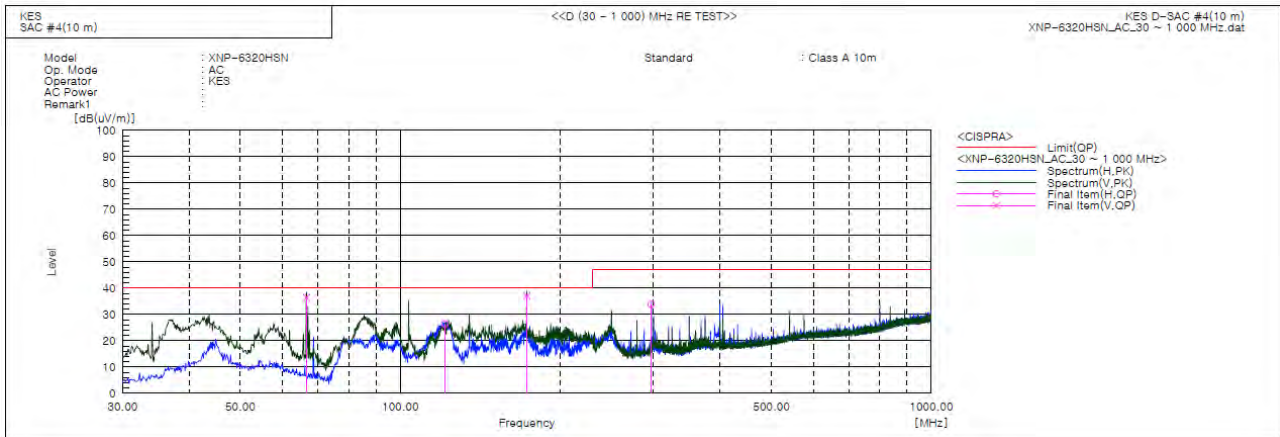

#### Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	66.618	V	67.3	-30.9	36.4	40.0	3.6	131.0	146.0	
2	121.301	H	57.6	-31.1	26.5	40.0	13.5	400.0	169.0	
3	173.075	V	67.3	-30.3	37.0	40.0	3.0	100.0	252.0	
4	296.993	H	57.9	-24.0	33.9	47.0	13.1	332.0	247.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



## KES Co., Ltd.


C-3701, Simin-daero 365-40,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:

KES-E1-17T0820

Page (26) of (48)

### ■ PoE Mode

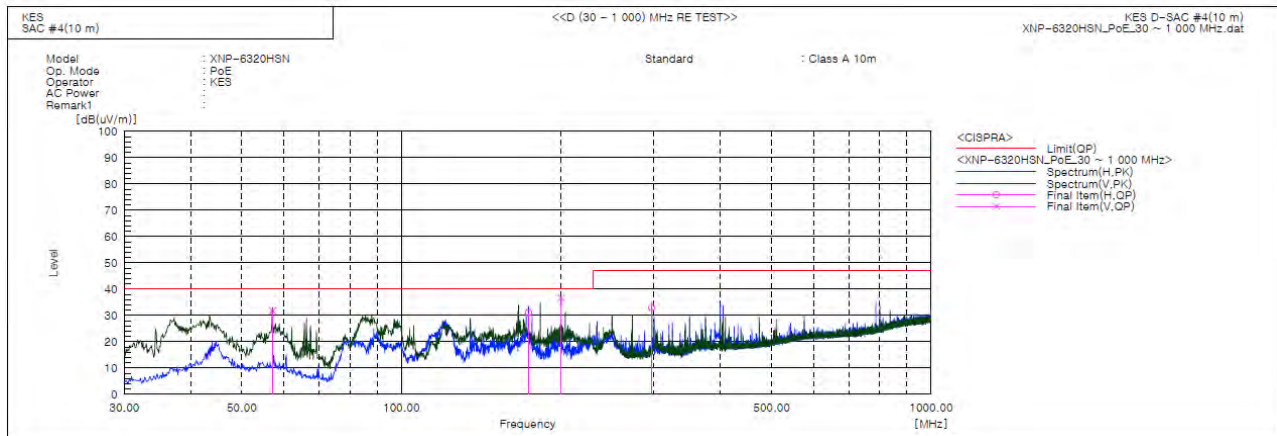

### Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	57.160	V	60.3	-28.5	31.8	40.0	8.2	114.0	293.0	
2	173.803	H	61.3	-30.2	31.1	40.0	8.9	400.0	242.0	
3	200.114	V	63.3	-26.7	36.6	40.0	3.4	135.0	3.0	
4	296.993	H	57.0	-24.0	33.0	47.0	14.0	342.0	255.0	

### ◆ Calculation

Corrected Amplitude [dBuV] = Amplitude[dBuV] + Correction Factor [dB]


Corrected Amplitude : The Final Value, Amplitude : Reading Value,

Correction Factor : ANT FACTOR + Cable loss

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


## Radiated Electric Field Emissions(Above 1 GHz)

### ■ AC 24 V Mode

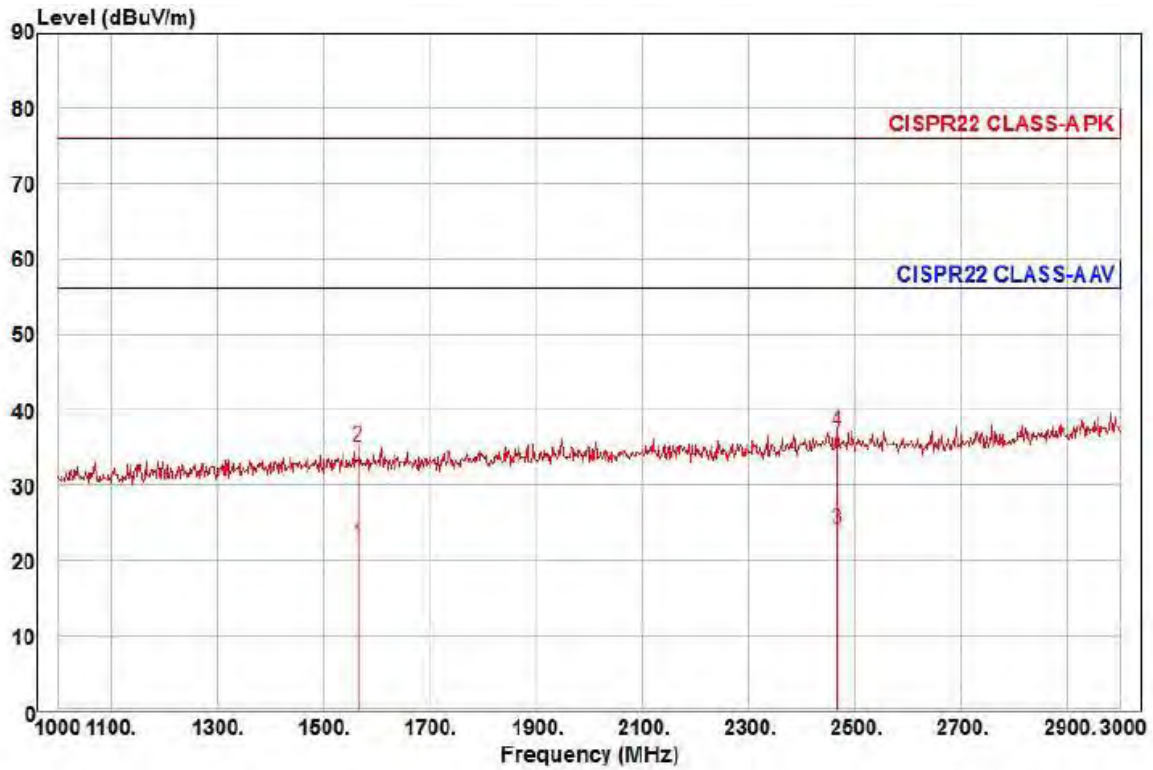

Site : YEOJU\_C 3 m SAC  
Condition: CISPR22 CLASS-A PK 3m BBHA 9120D(RRA 2019-09-04) horizontal  
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto  
Project :  
Model : XNP-6320HSN  
Mode : AC  
Memo : 1 ~ 3 GHz

	Read	Ant	Cable	Preamp	TPos	Limit	Over		
Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1566.00	23.74	25.65	8.41	35.56	298	56.00	-33.76	horizontal Average
2	1566.00	36.64	25.65	8.41	35.56	298	76.00	-40.86	horizontal Peak
3 pp	2468.00	21.61	27.14	10.75	35.35	36	56.00	-31.85	horizontal Average
4 pk	2468.00	34.46	27.14	10.75	35.35	36	76.00	-39.00	horizontal Peak

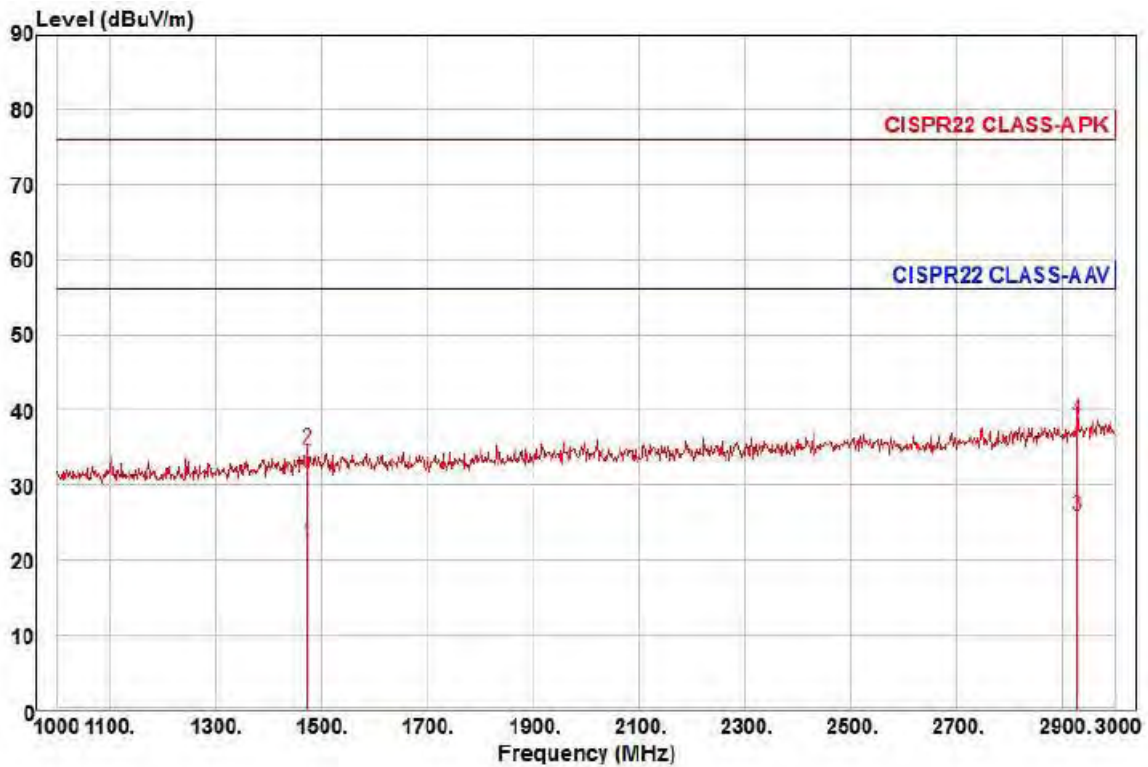

Site : YEOJU\_C 3 m SAC  
Condition: CISPR22 CLASS-A PK 3m BBHA 9120D(RRA 2019-09-04) vertical  
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto  
Project :  
Model : XNP-6320HSN  
Mode : AC  
Memo : 1 ~ 3 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1474.00	24.12	25.49	8.14	35.64	26	56.00	-33.89	vertical	Average
2	1474.00	36.76	25.49	8.14	35.64	26	76.00	-41.25	vertical	Peak
3 pp	2930.00	21.12	28.33	11.96	35.53	329	56.00	-30.12	vertical	Average
4 pk	2930.00	33.91	28.33	11.96	35.53	329	76.00	-37.33	vertical	Peak






# KES Co., Ltd.

C-3701, Simin-daero 365-40,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr


Test report No.:  
KES-EI-17T0820  
Page (29) of (48)

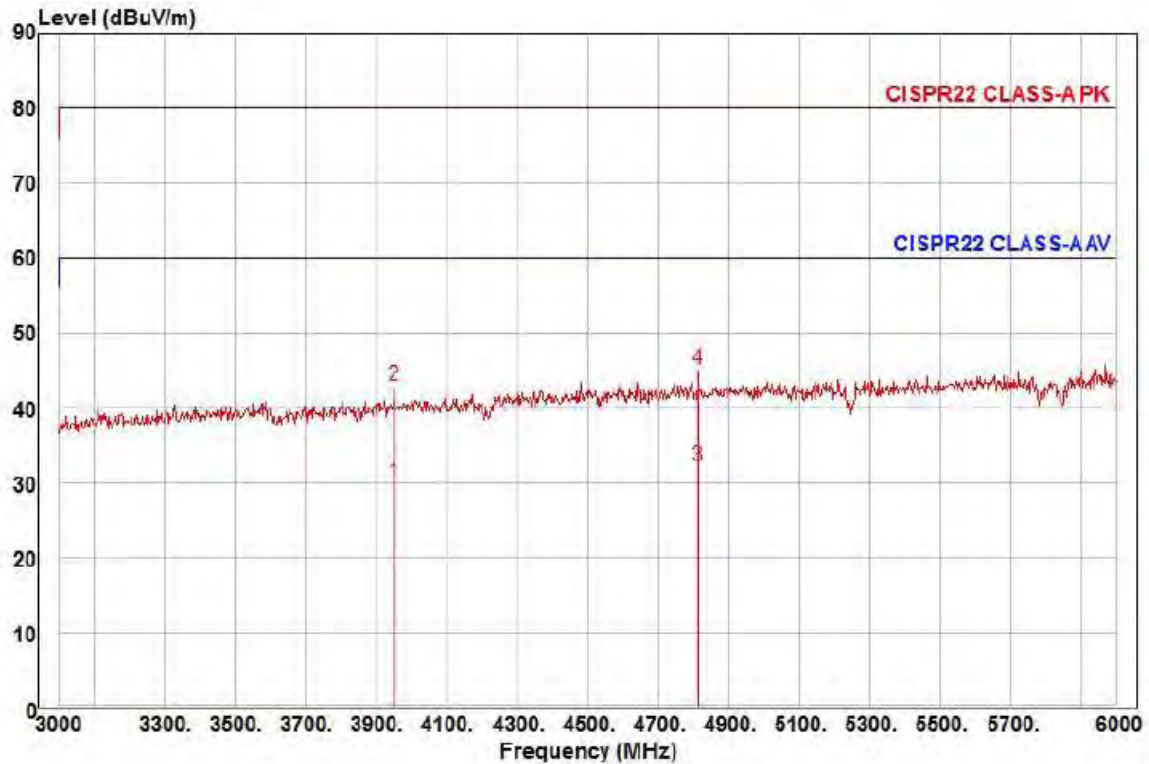

Site : YEOJU\_C 3 m SAC  
Condition: CISPR22 CLASS-A PK 3m BBHA 9120D(RRA 2019-09-04) horizontal  
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto  
Project :  
Model : XNP-6320HSN  
Mode : AC  
Memo : 3 ~ 6 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3951.00	21.59	29.74	13.96	35.29	152	60.00	-30.00	horizontal	Average
2	3951.00	34.60	29.74	13.96	35.29	152	80.00	-36.99	horizontal	Peak
3 pp	4815.00	20.87	31.27	15.53	35.57	79	60.00	-27.90	horizontal	Average
4 pk	4815.00	33.93	31.27	15.53	35.57	79	80.00	-34.84	horizontal	Peak

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

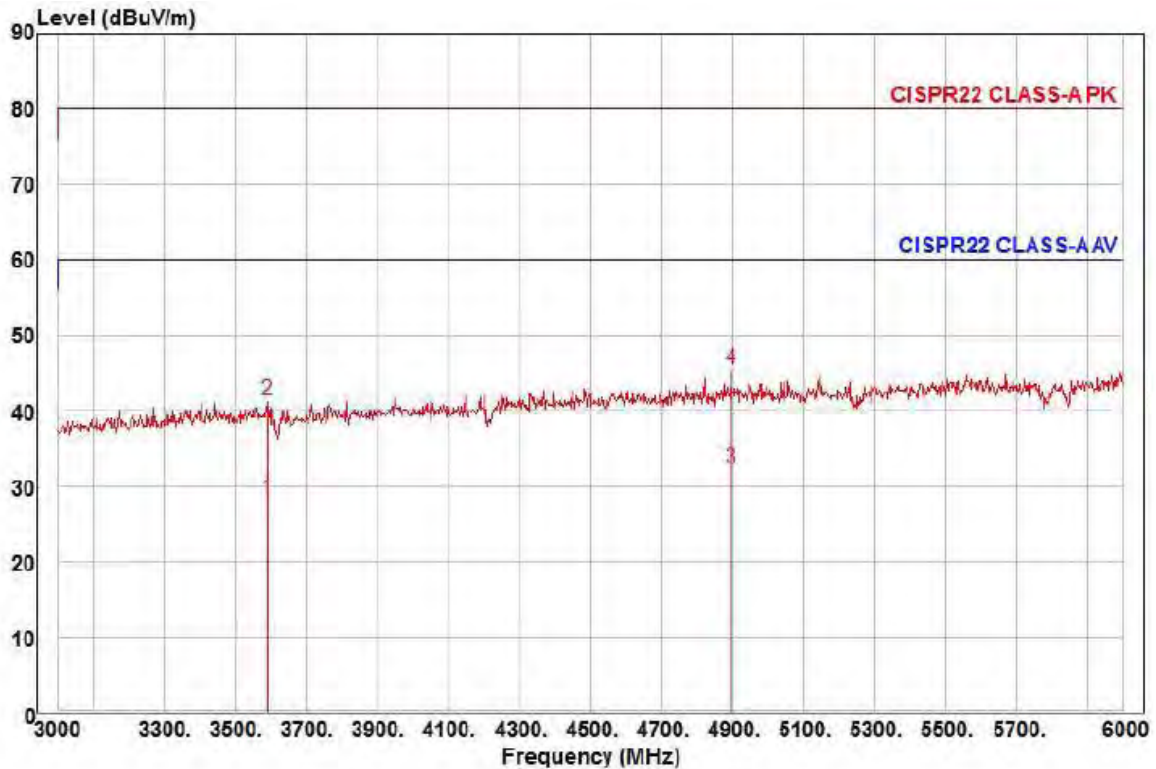

Site : YEOJU\_C 3 m SAC

Condition: CISPR22 CLASS-A PK 3m BBHA 9120D(RRA 2019-09-04) vertical

: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto

Project :


Model : XNP-6320HSN

Mode : AC

Memo : 3 ~ 6 GHz

	Read	Ant	Cable	Preamp	TPos	Limit	Over		
Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3588.00	21.27	29.04	13.26	35.40	40	60.00	-31.83	vertical
2	3588.00	34.46	29.04	13.26	35.40	40	80.00	-38.64	vertical
3 pp	4896.00	20.99	31.36	15.63	35.59	169	60.00	-27.61	vertical
4 pk	4896.00	34.05	31.36	15.63	35.59	169	80.00	-34.55	vertical

■ PoE Mode

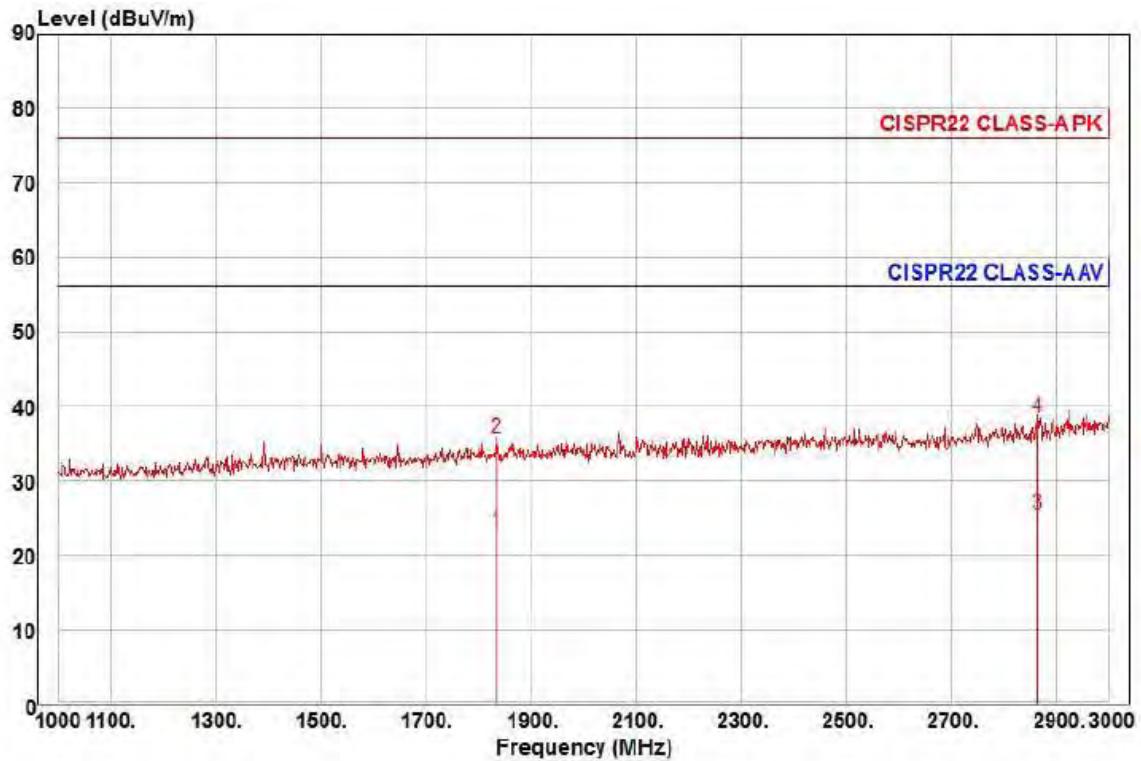

Site : YEOJU\_C 3 m SAC  
Condition: CISPR22 CLASS-A PK 3m BBHA 9120D(RRA 2019-09-04) horizontal  
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto  
Project :  
Model : XNP-6320HSN  
Mode : PoE  
Memo : 1 ~ 3 GHz


	Freq	Read Level	Ant Factor	Cable Loss	Preamplifier Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1834.00	23.27	25.96	9.19	35.32	311	56.00	-32.90	horizontal	Average
2	1834.00	35.83	25.96	9.19	35.32	311	76.00	-40.34	horizontal	Peak
3 pp	2864.00	21.06	28.16	11.78	35.51	172	56.00	-30.51	horizontal	Average
4 pk	2864.00	33.97	28.16	11.78	35.51	172	76.00	-37.60	horizontal	Peak



# KES Co., Ltd.

C-3701, Simin-daero 365-40,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-E1-17T0820  
Page (32) of (48)

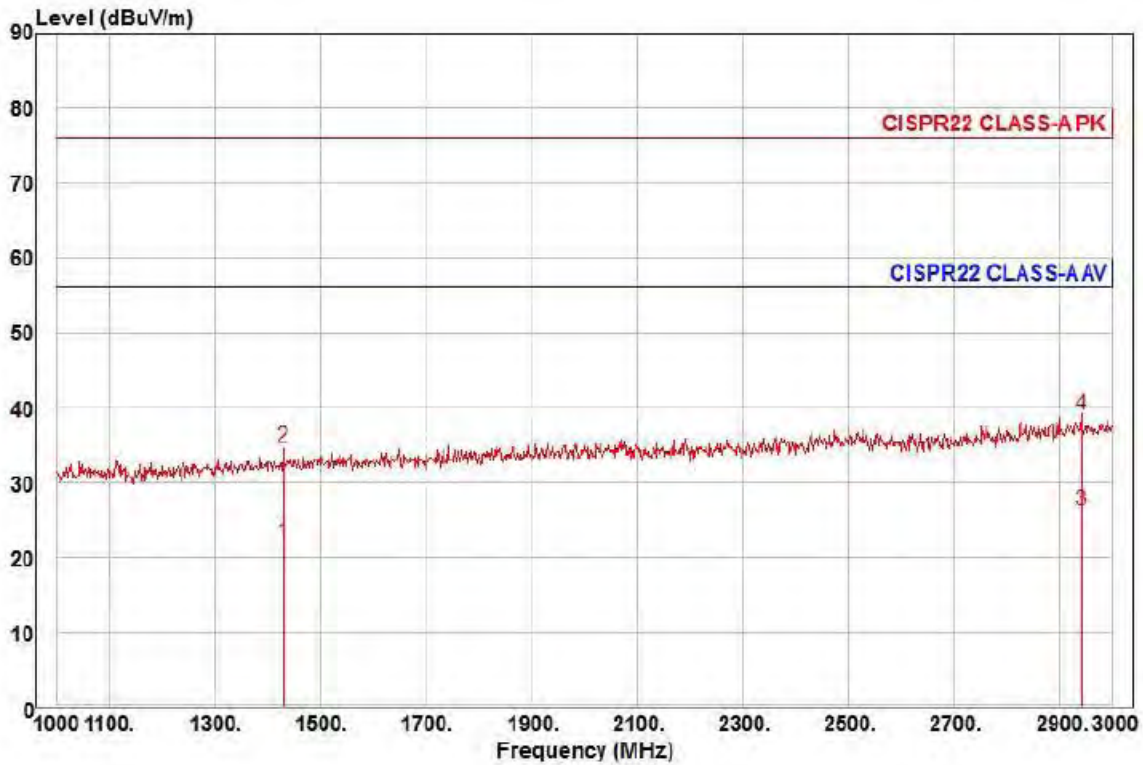


Site : YEOJU\_C 3 m SAC  
Condition: CISPR22 CLASS-A PK 3m BBHA 9120D(RRA 2019-09-04) vertical  
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto  
Project :  
Model : XNP-6320HSN  
Mode : PoE  
Memo : 1 ~ 3 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamplifier Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1428.00	24.24	25.36	8.01	35.68	136	56.00	-34.07	vertical	Average
2	1428.00	36.96	25.36	8.01	35.68	136	76.00	-41.35	vertical	Peak
3 pp	2942.00	21.40	28.36	11.99	35.54	64	56.00	-29.79	vertical	Average
4 pk	2942.00	34.16	28.36	11.99	35.54	64	76.00	-37.03	vertical	Peak

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



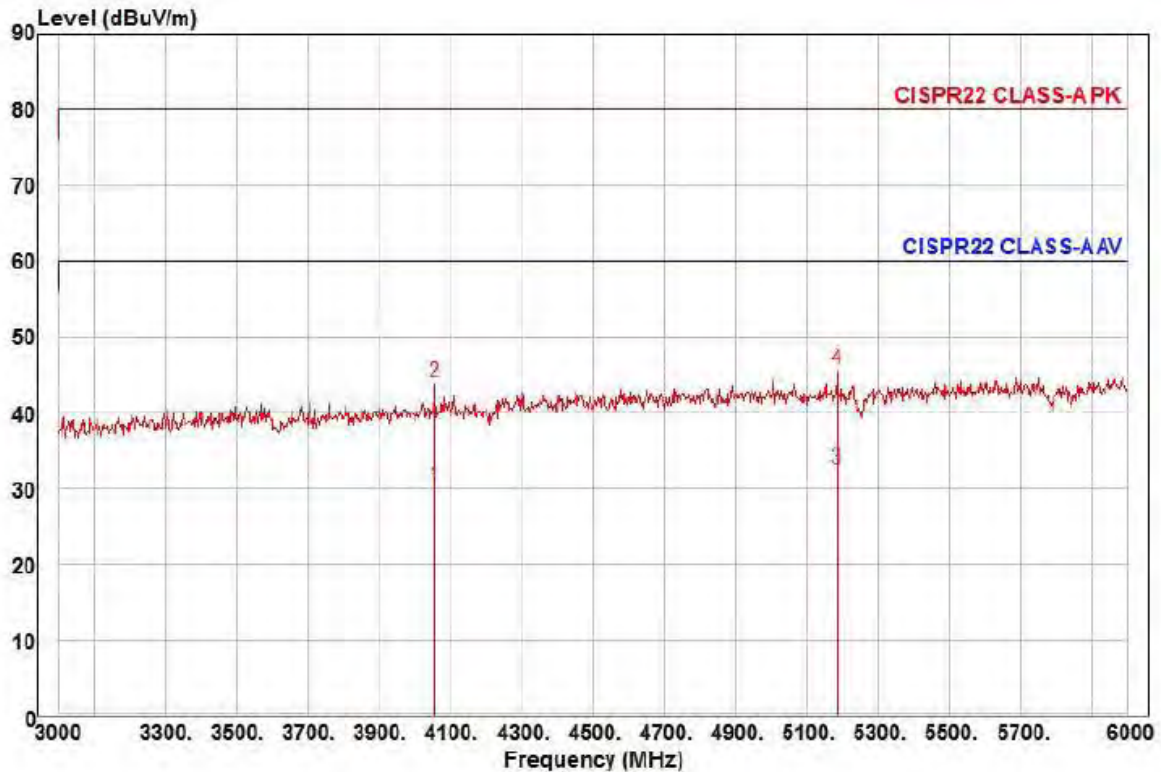

Site : YEOJU\_C 3 m SAC

Condition: CISPR22 CLASS-A PK 3m BBHA 9120D(RRA 2019-09-04) horizontal

: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto


Project :

Model : XNP-6320HSN

Mode : PoE

Memo : 3 ~ 6 GHz

	Read	Ant	Cable	Preamp	TPos	Limit	Over		
Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	4056.00	21.46	29.95	14.16	35.30	247	60.00	-29.73	horizontal Average
2	4056.00	35.08	29.95	14.16	35.30	247	80.00	-36.11	horizontal Peak
3 pp	5184.00	20.51	31.59	16.04	35.64	302	60.00	-27.50	horizontal Average
4 pk	5184.00	33.66	31.59	16.04	35.64	302	80.00	-34.35	horizontal Peak

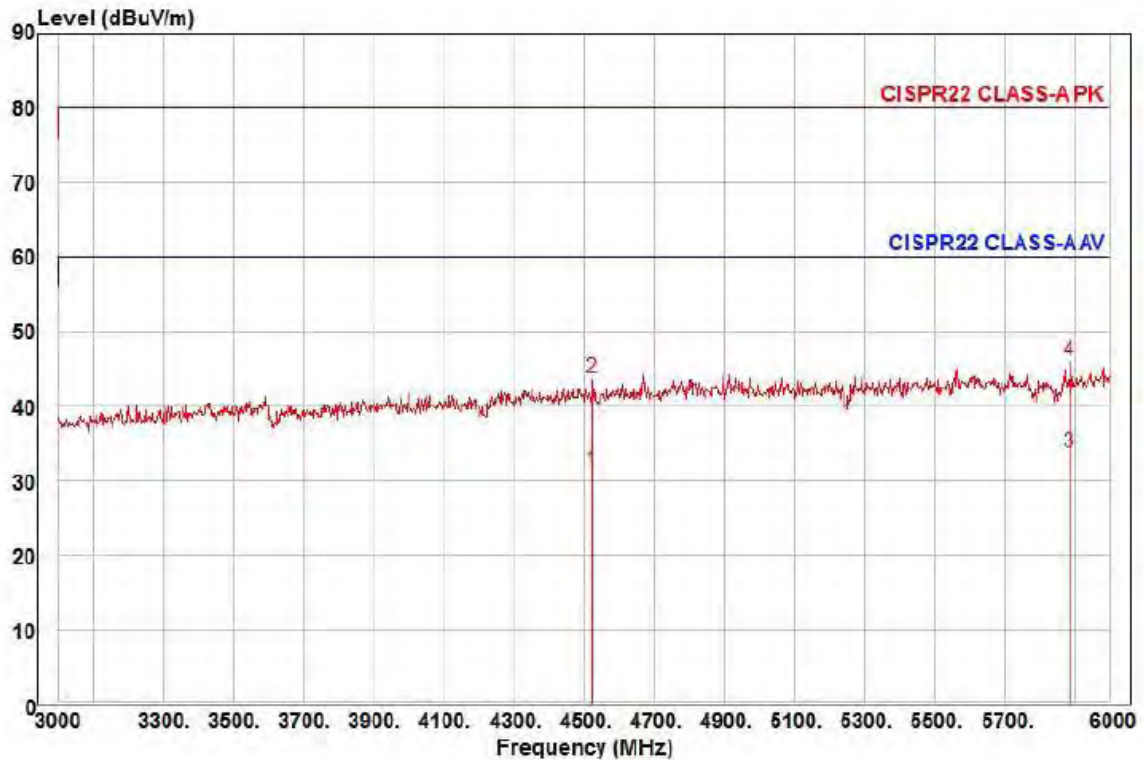

Site : YEOJU\_C 3 m SAC  
Condition: CISPR22 CLASS-A PK 3m BBHA 9120D(RRA 2019-09-04) vertical  
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto  
Project :  
Model : XNP-6320HSN  
Mode : PoE  
Memo : 3 ~ 6 GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	4524.00	21.00	30.93	15.00	35.46	29	60.00	-28.53	vertical	Average
2	4524.00	33.23	30.93	15.00	35.46	29	80.00	-36.30	vertical	Peak
3 pp	5886.00	19.68	32.41	17.30	35.68	187	60.00	-26.29	vertical	Average
4 pk	5886.00	32.03	32.41	17.30	35.68	187	80.00	-33.94	vertical	Peak

#### ◆ Calculation

Over Limit [dB] = (Read Level[ $\mu$ V] + Ant Factor[ $\mu$ V/m] + Cable Loss [dB] - Preamp Factor [dB])  
- Limit Line[ $\mu$ V]

Over Limit : Margin, Read Level : Reading value, Ant Factor : ANT Factor,

Cable Loss : Cable loss, Preamp Factor : Preamp Factor

## Test Setup Photos and Configuration

### Conducted Voltage Emissions



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.





## Conducted Telecommunication Emissions



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


## adiated Electric Field Emissions(Below 1 GHz)

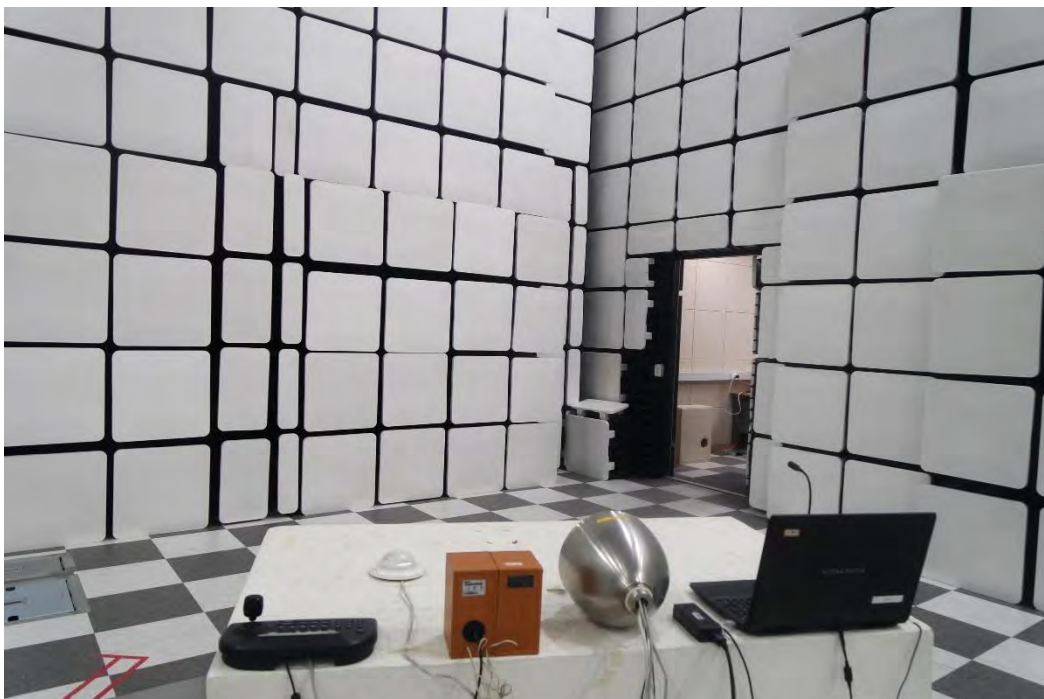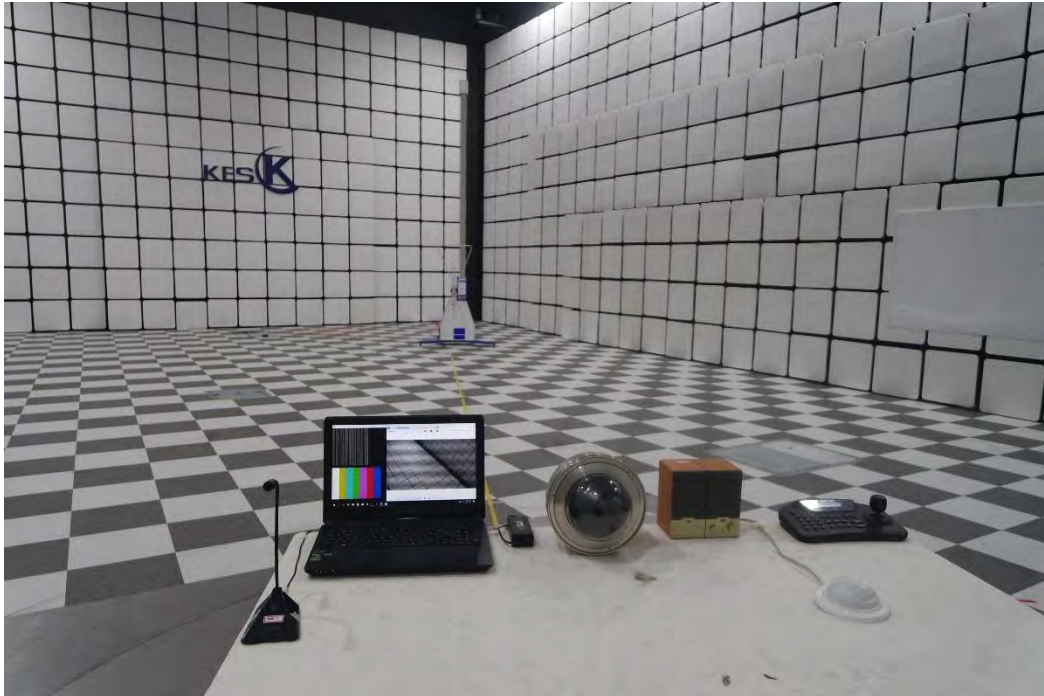

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



## Radiated Electric Field Emissions(Above 1 GHz)

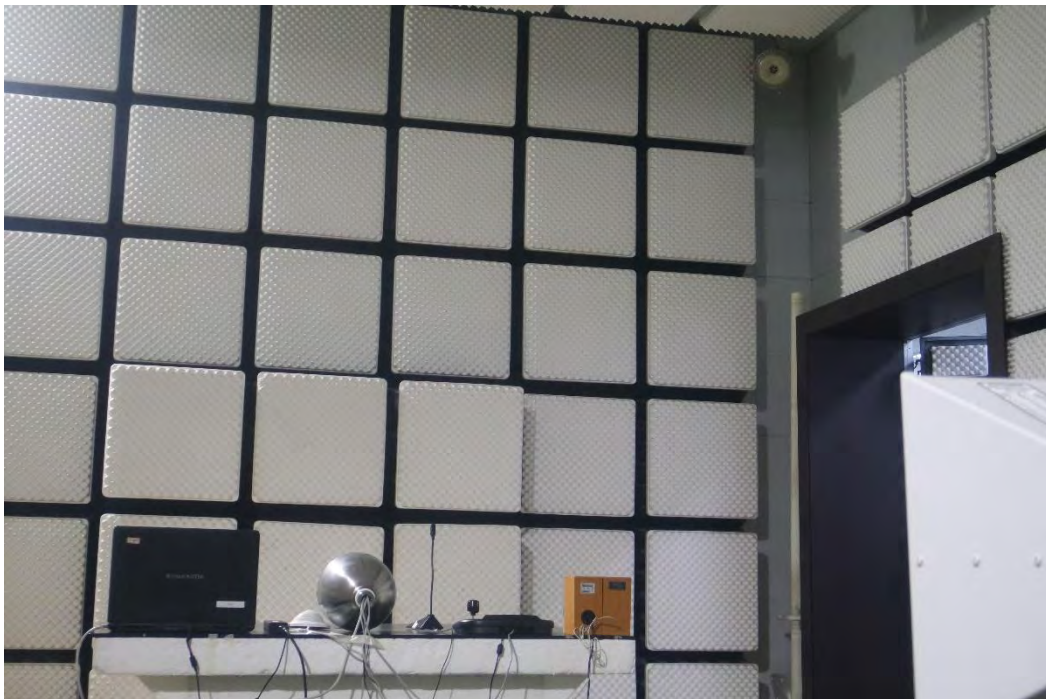

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



## EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

## EUT Internal Photographs


(Internal View)






## EUT Internal View – Main board

(Top)

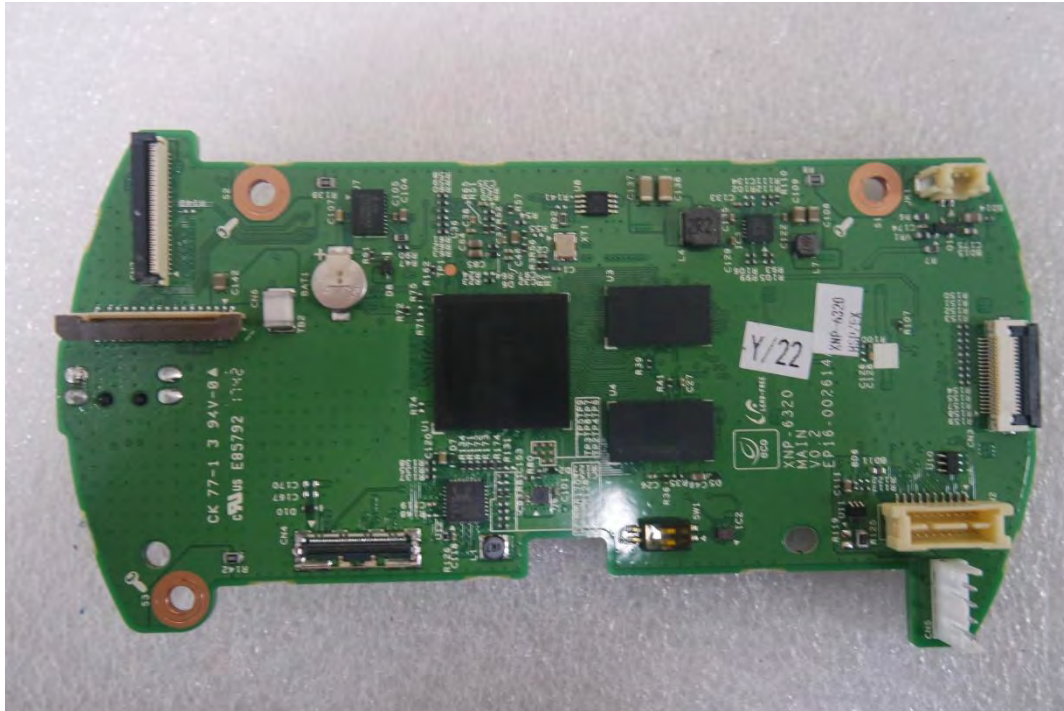


(Bottom)

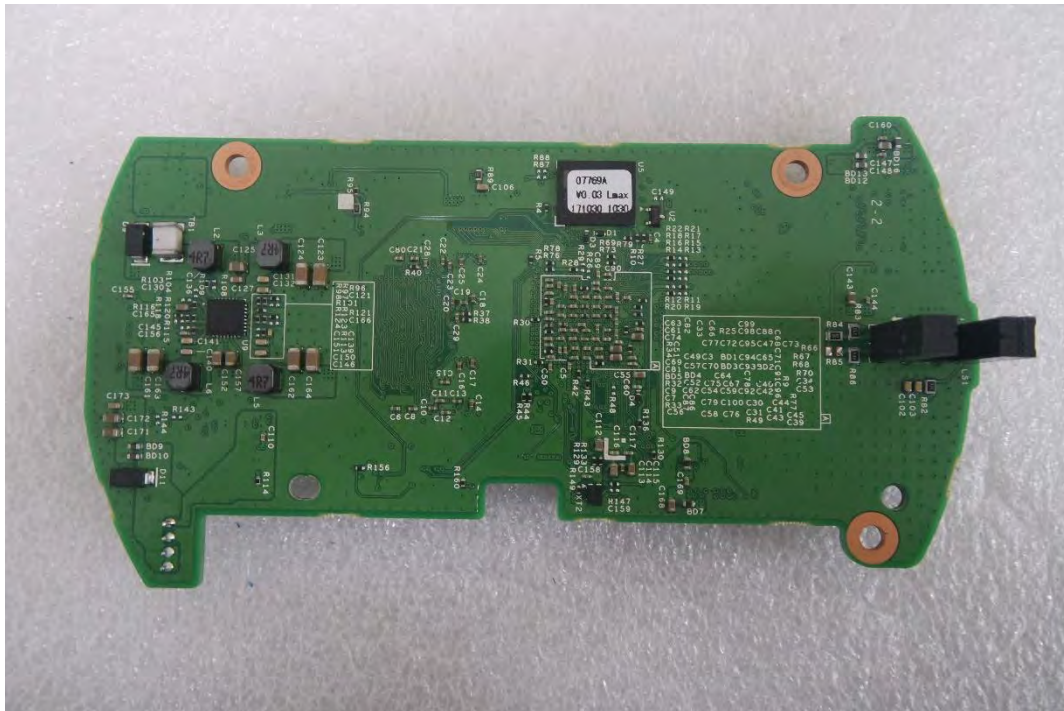


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

## EUT Internal View – Interface board

(Top)

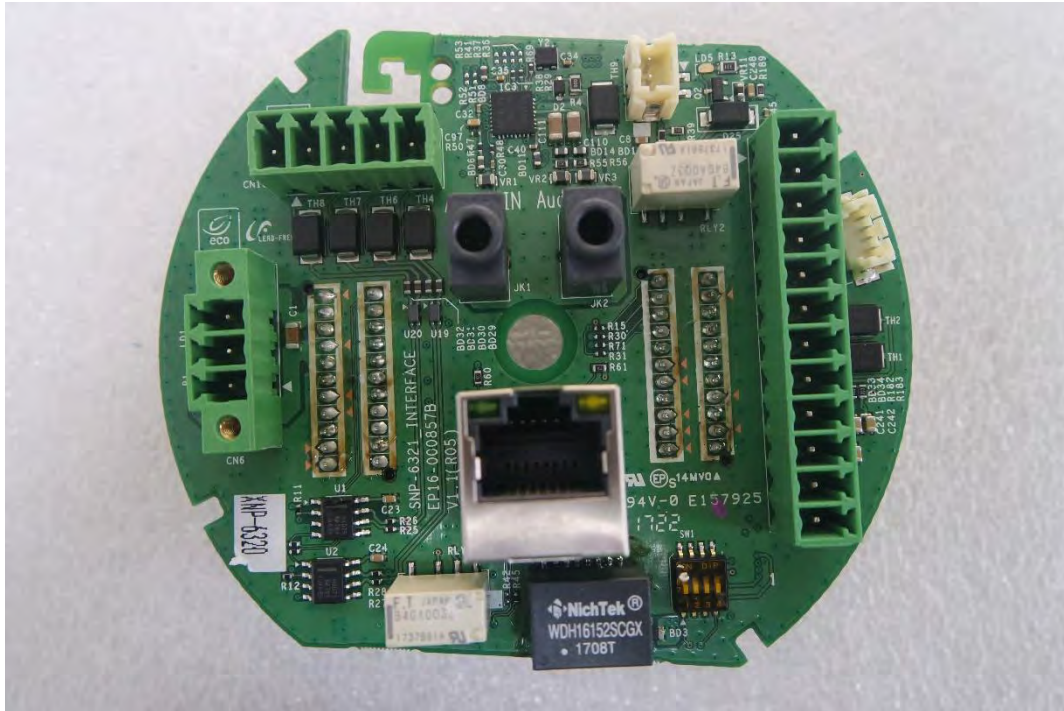

(Bottom)

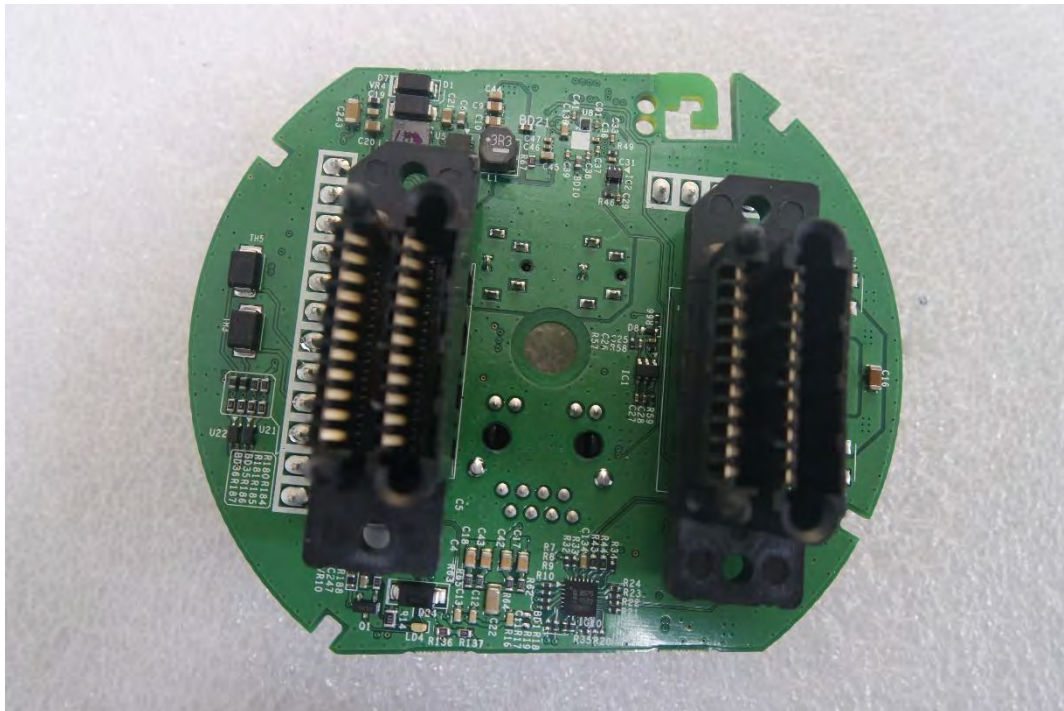


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.




## EUT Internal View – Drive board

(Top)

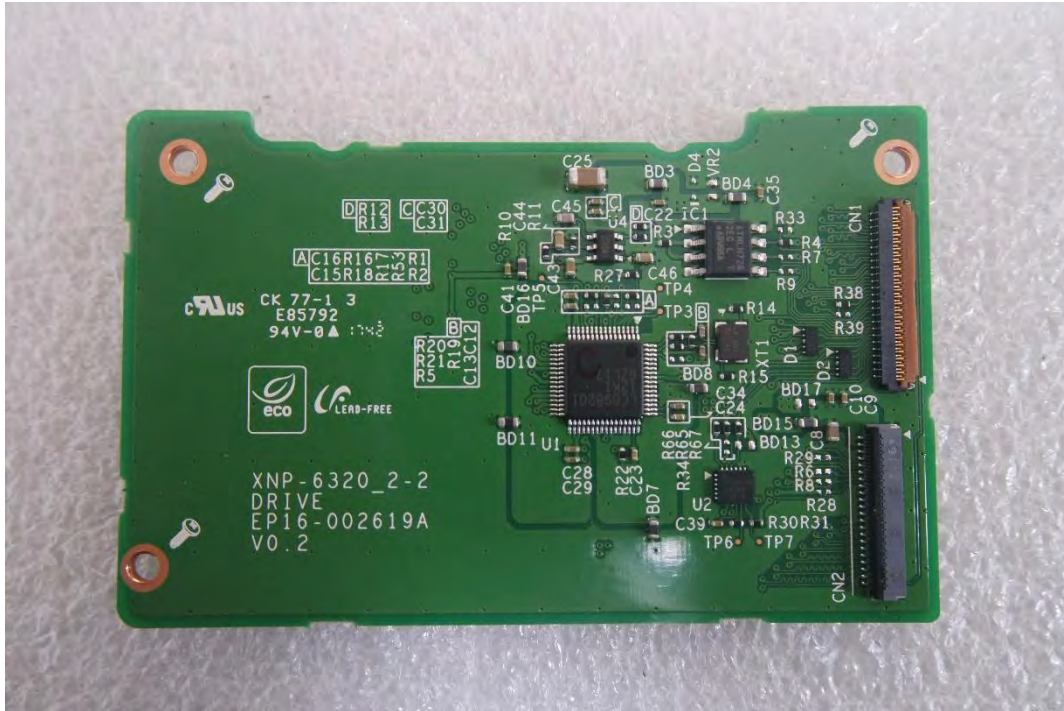


(Bottom)

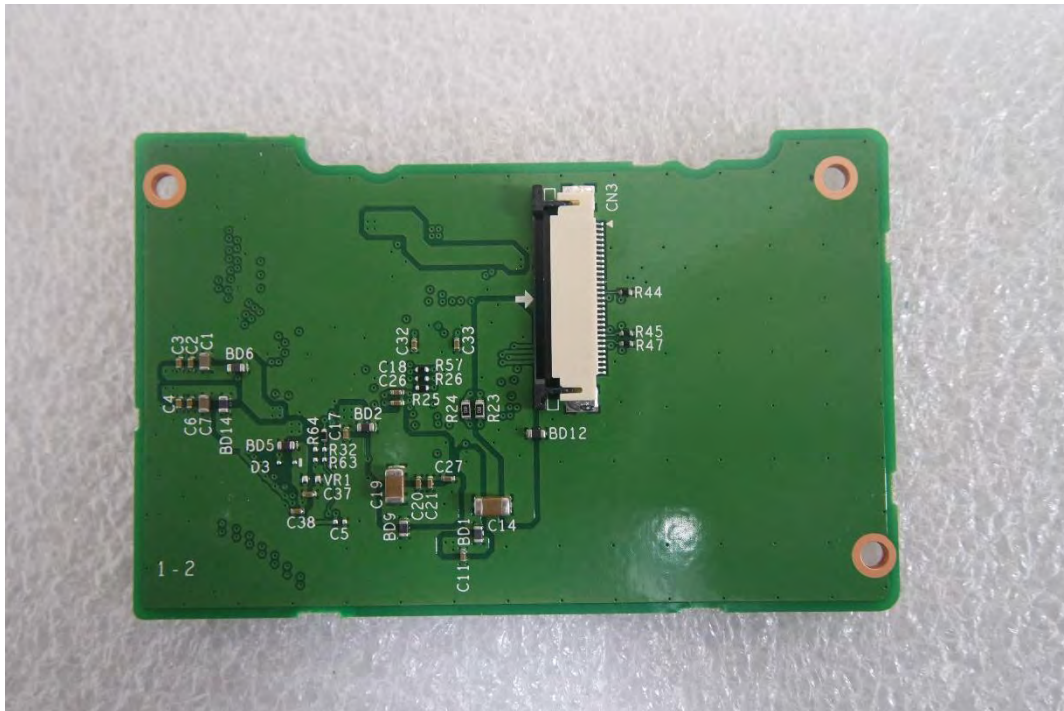

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

## EUT Internal View – CCD board

(Top)

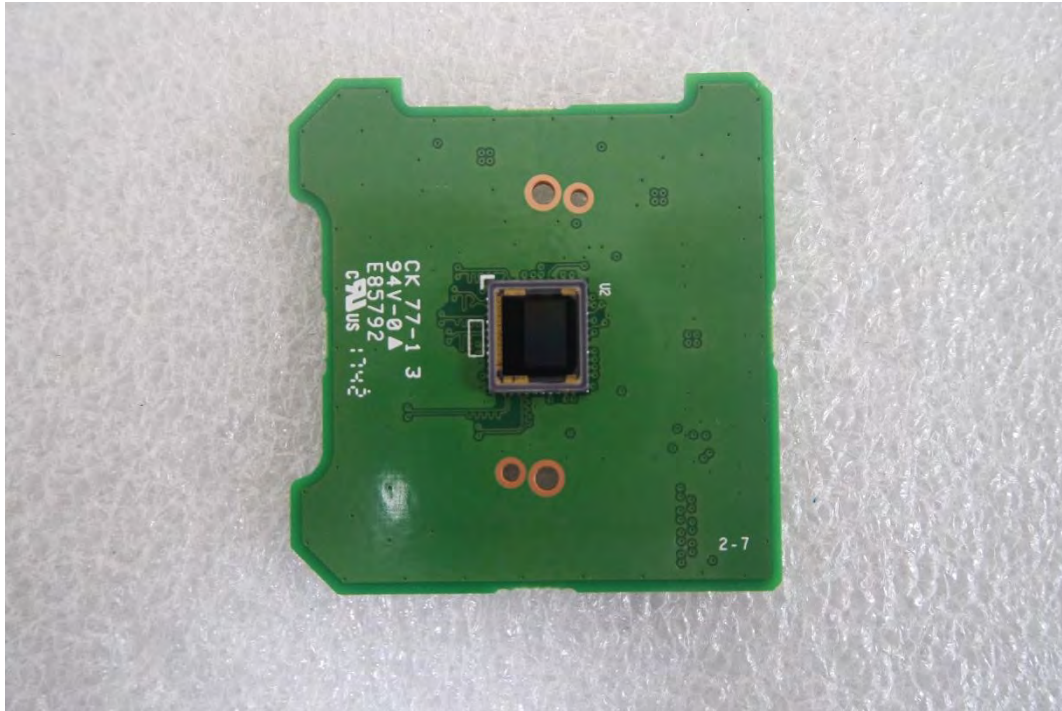

(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.




## EUT Internal View – SD board

(Top)

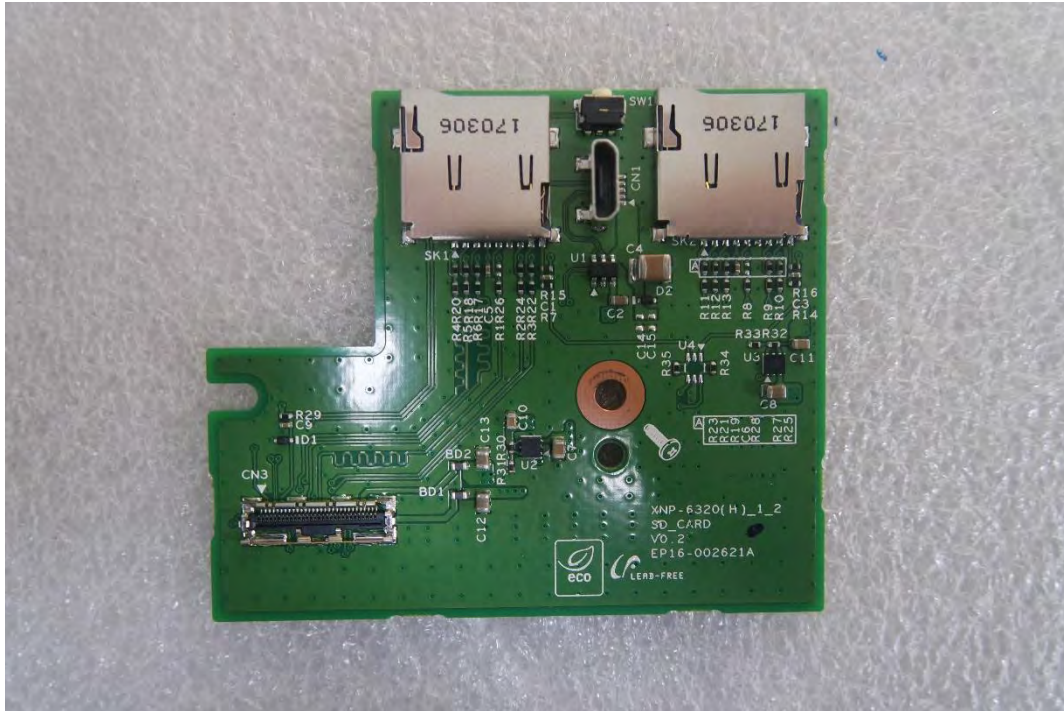


(Bottom)

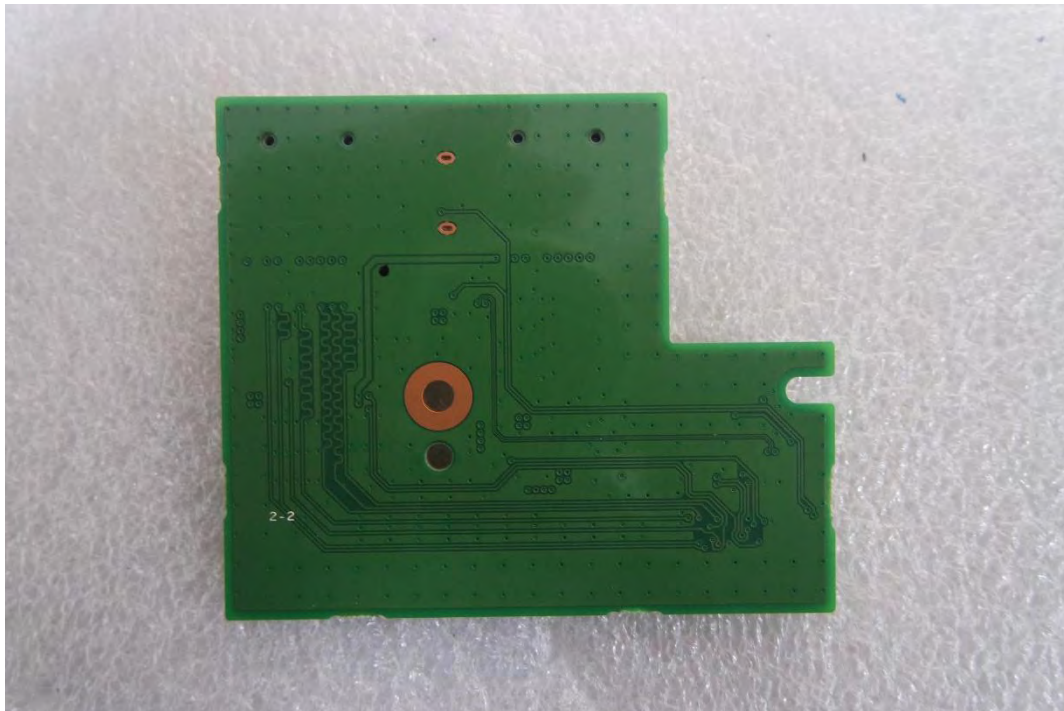


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

## EUT Internal View – Power board

(Top)

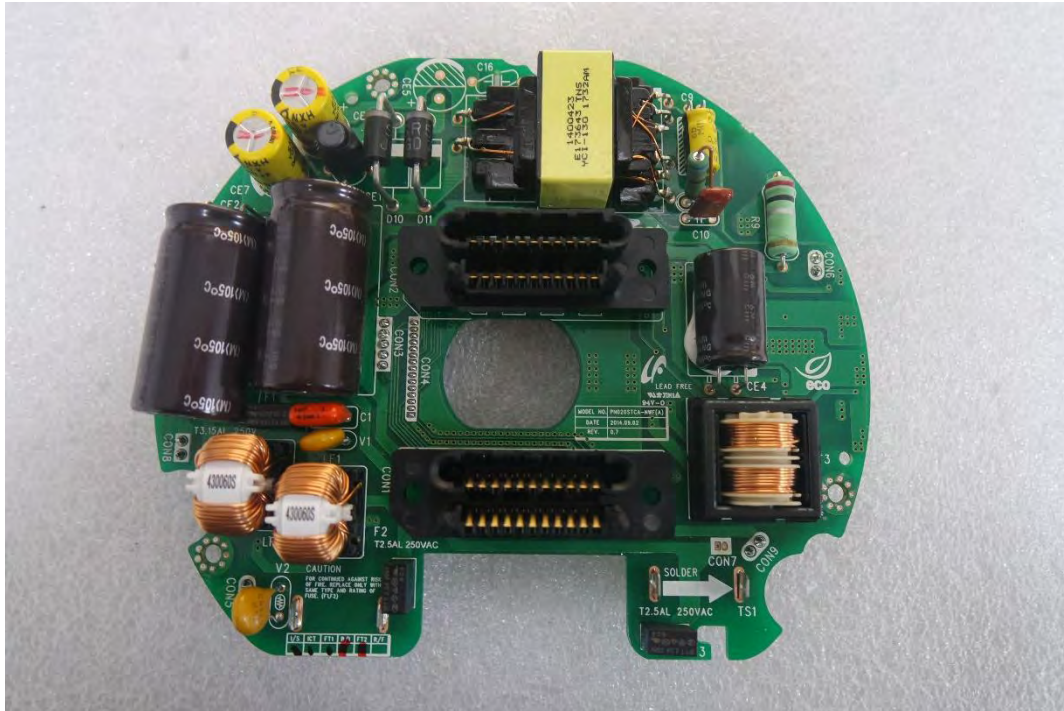

(Bottom)

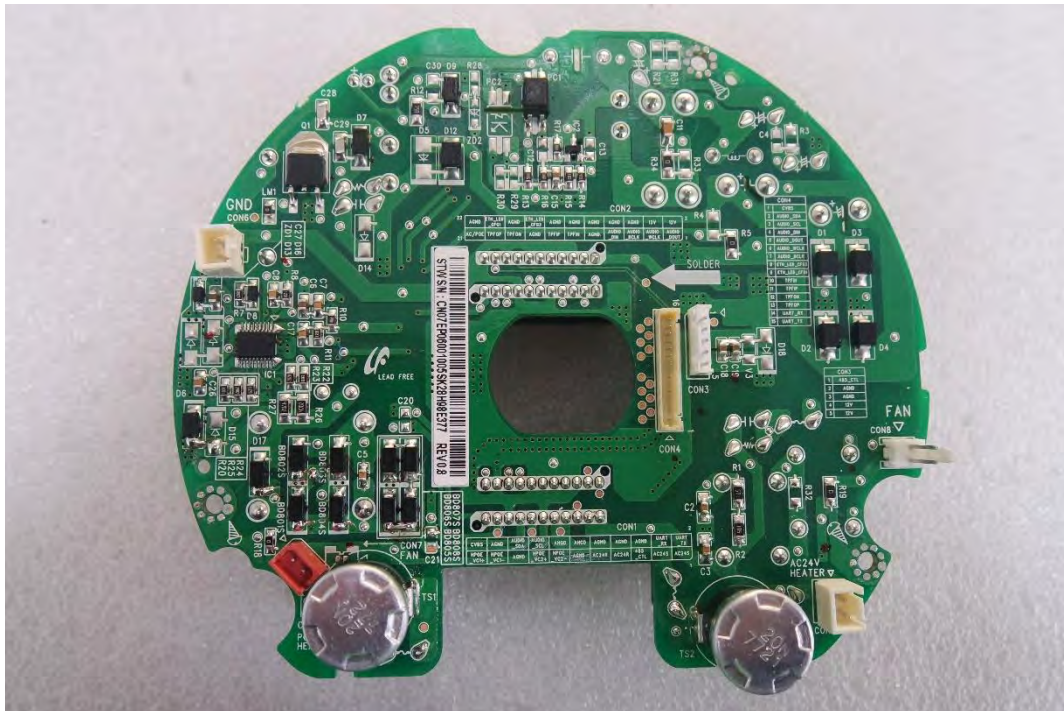


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.




## EUT Internal View – TILT board

(Top)

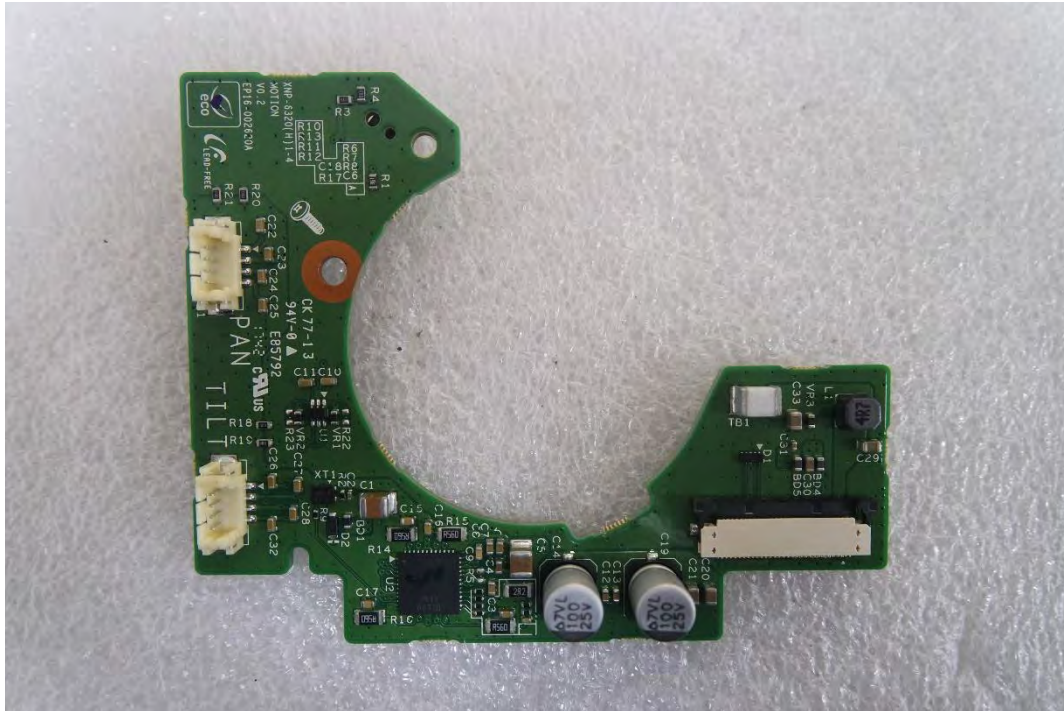


(Bottom)

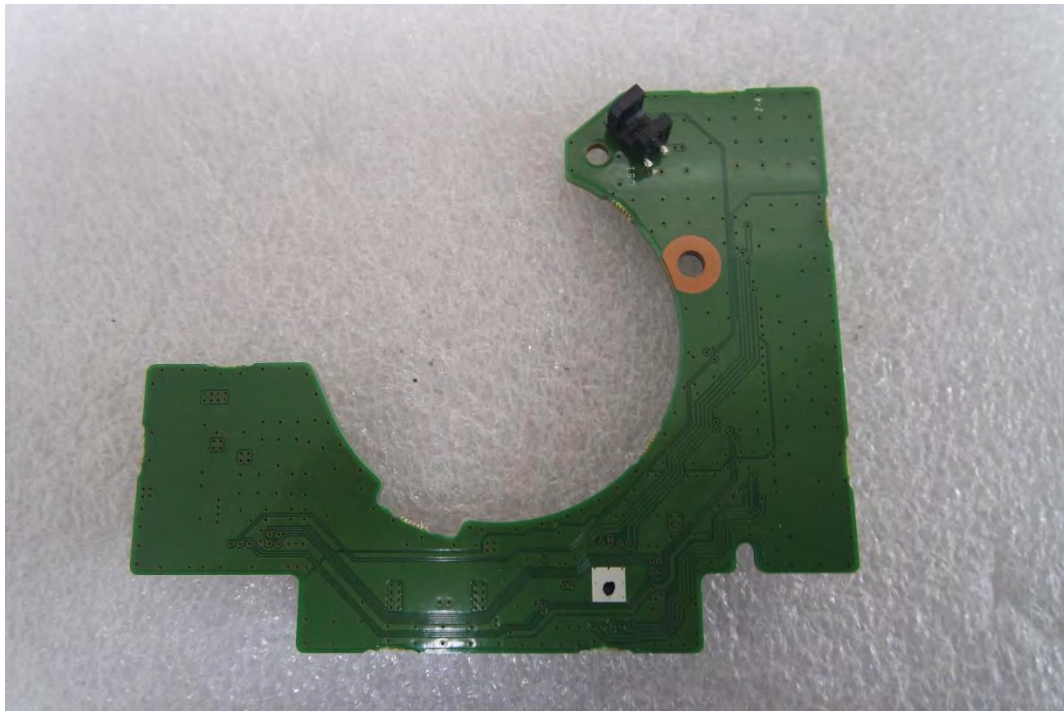


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

## EUT Internal View – Lens Module

(Top)

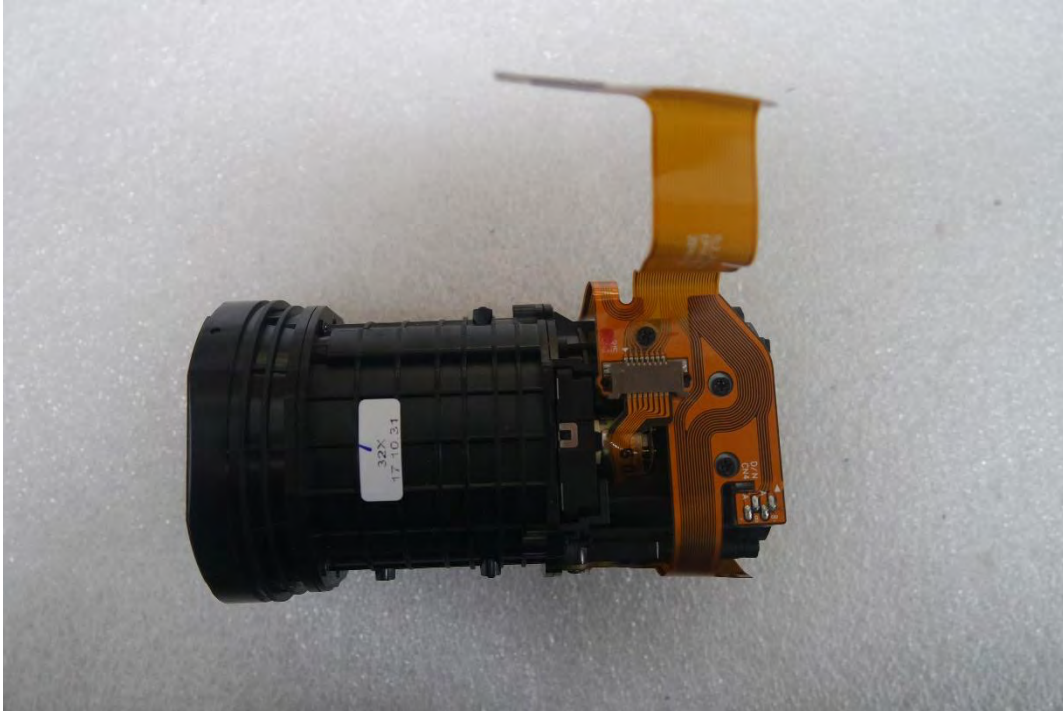

(Bottom)

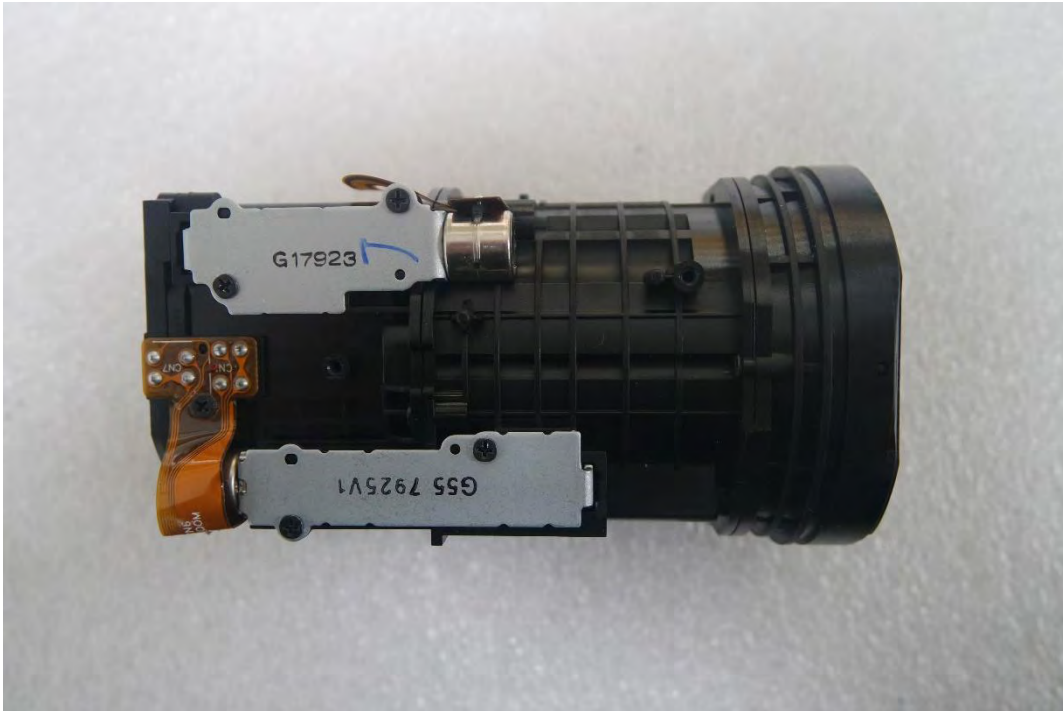

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.