

DECLARATION OF CONFORMITY

We; Hanwha Techwin Co., Ltd.

DECLARE UNDER OUR SOLE RESPONSIBILITY THAT THE PRODUCT;

Report No: KES-E1-16T0213

**Type of
equipment:** NETWORK CAMERA

Model Name: QNO-7030RP

Variant Model: QNO-7020RP, QNO-7010RP

Applicant: Hanwha Techwin Co., Ltd.

Address: 1204, Changwon-daero, Seongsan-gu,
Chang-won-si, Gyeongsangnam-do, Korea

Manufacturer : Tianjin Samsung Techwin Opto-
Electronic Co., Ltd.

Address: No.11 Weiliu Rd, Micro-Electronic
Industrial Park, TEDA, Tianjin, 300385,
People's Republic of China

Test standards : AS/NZS CISPR22:2009+A1:2010

Classification: C-Tick

The above equipment was tested by EMC compliance Testing Laboratory for with the requirements of C-tick Rules and Regulations. The results of testing in this report apply to the product / system which was tested only.

May. 17. 2016
(Date of issue)

(Name and signature of authorized person)



EMC TEST REPORT For C-TICK

Test Report No. : KES-E1-16T0213
Date of Issue : May. 17, 2016
Product name : NETWORK CAMERA
Model/Type No. : QNO-7030RP
Variant Model : QNO-7020RP, QNO-7010RP
Applicant : Hanwha Techwin Co., Ltd.
Applicant Address : 1204, Changwon-daero, Seongsan-gu, Changwon-si,
Gyeongsangnam-do, Korea
Manufacturer : Tianjin Samsung Techwin Opto-Electronic Co.,Ltd.
Manufacturer Address : No.11 Weiliu Rd, Micro-Electronic Industrial Park, TEDA, Tianjin,
300385, People's Republic of China
Date of Receipt : May. 02, 2016
Test date : May. 09, 2016
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Hyo Jin, Kim
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0213
Page (2) of (43)

REPORT REVISION HISTORY

Date	Revision	Page No
May. 17, 2016	KES-E1-16T0213	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency	4
1.2	Variant Model Differences.....	6
1.3	Device Modifications	6
1.4	Equipment Under Test.....	6
1.5	Support Equipments	6
1.6	External I/O Cabling	7
1.7	EUT Operating Mode(s)	7
1.8	Configuration.....	8
1.9	Calibration Details of Equipment Used for Measurement	9
1.10	Test Facility	9
1.11	Laboratory Accreditations and Listings	9
2.0	Test Regulations.....	10
2.1	Conducted Emissions at Mains Power Ports	12
2.2	Conducted Emissions at Telecommunication Ports.....	13
2.3	Radiated Electric Field Emissions(Below 1 GHz)	14
2.4	Radiated Electric Field Emissions(Above 1 GHz)	15
APPENDIX A – TEST DATA.....		16
Conducted Emissions at Mains Power Ports.....		16
Conducted Emissions at Telecommunication Ports		18
Radiated Electric Field Emissions(Below 1 GHz)		22
Radiated Electric Field Emissions(Above 1 GHz)		23
Test Setup Photos and Configuration		31
Conducted Voltage Emissions		31
Conducted Telecommunication Emissions		32
Radiated Electric Field Emissions(Below 1 GHz)		34
Radiated Electric Field Emissions(Above 1 GHz)		36
EUT External Photographs		38
EUT Internal Photographs		39



1.0 General Product Description

Main Specifications of EUT are:

	QNO-7030R
Video	
Imaging Device	1/3" 4M CMOS
Total Pixels	2720x1536
Effective Pixels	2688x1520
Scanning System	Progressive
Min. Illumination	Color : 0.3Lux, B/W : 0Lux
Lens	
Focal Length (Zoom Ratio)	Fixed 6mm (F2.2)
Max. Aperture Ratio	F2.2
Angular Field of View	D 62° / H 53° / V 31°
Min. Object Distance	-
Lens Type	Fixed
Mount Type	Board type
Pan / Tilt / Rotate	
Pan Range	0
Tilt Range	0
Rotate Range	0
Operational	
IR Viewable Length	30m
Camera Title	Off / On (Displayed up to 20 characters per line) - W/W : English/Numeric/Special Characters - China : English/Numeric/Special/Chinese Characters - Common : Multi-line (Max 5), Color (Grey/Green/Red/Blue/Black/White), Transparency, Auto Scale by Resolution
Day & Night	True Day & Night
Backlight Compensation	Off / BLC
Highlight Compensation	(미지원)
Wide Dynamic Range	120dB
Digital Noise Reduction	SSNR(Off / On)
Motion Detection	Off / On (4ea polygon zones)
Privacy Masking	Off / On (6ea rectangular zones)
Gain Control	Off / Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor
LDC(Lens distortion control)	On/Off (5 levels with Min/Max)
Electronic Shutter Speed	Minimum / Maximum / Anti flicker
Flip / Mirror	Flip / Mirror / Hallway view
Intelligent Video Analytics	Motion Detection with metadata, Tampering, Defocus
Alarm I/O	Input 1 / Output 1
Alarm Triggers	Motion detection, Tampering Detection, SD card error, NAS error, Alarm input, Defocus detection
Alarm Events	File upload via FTP and E-Mail Local storage recording at Event Notification via E-Mail External output
Network	
Ethernet	RJ-45 (10/100BASE-T)
Video Compression Format	H.265, H.264, MJPEG
Resolution	2592x1520, 2560x1440(16:9) / 2304x1296 / 1920x1080 / 1280x1024 / 1280x960 / 1280x720 / 1024x768 / 800x600 / 800x450 / 720x576 / 720x480 / 640x480 / 640x360 / 320x240
Max. Framerate	H.265 : Max 20fps at 4M, Max 30fps at 2M all resolutions H.264 : Max 20fps at 4M, Max 30fps at 2M all resolutions MJPEG : Max 15fps @ all resolution.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0213

Page (5) of (43)

Smart codec	Wise Stream
Video Quality Ajustment	H.265 : Target Bitrate Level Control H.264 : Target Bitrate Level Control MJPEG : Quality Level Control
Bitrate control method	H.265 : CBR or VBR H.264 : CBR or VBR MJPEG : VBR
Streaming Capability	Multiple Streaming(Up to 3 Profiles)
Audio I/O	Line in
Audio Compression Format	G.711 u-law /G.726 Selectable G.726(ADPCM) : 8KHz, G.711 : 8KHz G.726 : 16Kbps, 24Kbps, 32Kbps, 40Kbps
Audio Communication	Uni-directional
IP	IPv4, IPv6
Protocol	TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP,RTSP, NTP, HTTP, HTTPS, SSL/TSL, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour
Security	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access Log 802.1X Authentication
Streaming Method	Unicast / Multicast
Max. User Access	6 users at Unicast Mode
Edge storage	Micro SD/SDHC/SDXC Max 128G, NAS - Motion images recorded in the SD memory card can be downloaded - Manual recording at Local PC
Application Programming Inter	ONVIF Profile S, G SUNAPI(HTTP API)
Webpage Language	English, French, German, Spanish, Italian, Chinese, Korean, Russian, Japanese, Swedish, Danish, Portuguese, Turkish, Polish, Czech, Rumanian, Serbian, Dutch, Croatia, Hungary, Greek, Finnish, Norwegian
Web Viewer	Supported OS: Windows 7, 8, 10, Mac OS X 10.8, 10.9, 10.10, 10.11 [Non-plugin Webviewer] Supported Browser: Google Chrome 47, MS Edge 20 Support Codec : Video-H.264, MJPEG (Max. 1M 15fps), Audio-G.711 [Plug-in Webviewer] Supported Browser : MS Explore 11 , Mozilla Firefox 43, Apple Safari 9 * Mac OS X only
Central Management Software	SmartViewer
Pixel Counter	Support (plug-in viewer only)
Environmental	
Operating Temperature / Humi	-30°C ~ +55°C / Less than 90% RH * Start up should be done at above -20°C
Storage Temperature / Humidi	-30°C ~ +60°C (-22°F ~ +140°F) / Less than 90% RH
Ingress Protection	IP66
Vandal Resistance	IK10
Electrical	
Input Voltage / Current	PoE(IEEE802.3af, Class3), DC 12V
Power Consumption	Max.6.6W(PoE), Max.5.5W(DC12V)
Mechanical	
Color / Material	Gray / Metal
Dimension (WxHxD)	φ70.0x246mm
Weight	730g

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 100 Vac ☐ 110 Vac ☐ 230 Vac ☒ PoE ☒ 12 Vdc
Frequency ☐ 50 Hz ☐ 60 Hz ☐ Hz

1.2 Variant Model Differences

Variant Model	Differences
QNO-7020RP	Focus Length differences
QNO-7010RP	

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	QNO-7030RP	-	Tianjin Samsung Techwin Opto-Electronic Co., Ltd.	E.U.T

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
PoE	HICC-P-2100XIRV	15030100002	Honeywell	-
Notebook	NT630Z5J	JK9091EF400142M	Samsung Electronics Suzhou Computer Co., Ltd.	-
Notebook Adapter	A13-040N2A	CN60BA4400313ADON 843K0200	Chicony Power Technology (suzhou)Co., Ltd.	-
Alarm	SIE-0001 DO	C54167JB601268 F	SAMSUNG TECHWIN CO., LTD.	-
Micro SD card	-	-	Transcend	4 GB
MIC	CMK-303	-	CAMAC	-

1.6 External I/O Cabling

- DC 12 V Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (E.U.T)	Alarm IN	Alarm	Alarm IN	3.0	U
	RJ-45	Notebook	RJ-45	4.0	U
	Micro SD card SLOT	Micro SD card	Micro SD card SLOT	-	-
	Audio In	MIC	Audio In	1.9	U

- PoE Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (E.U.T)	Alarm IN	Alarm	Alarm IN	3.0	U
	RJ-45	PoE	RJ-45	4.0	U
	Micro SD card SLOT	Micro SD card	Micro SD card SLOT	-	-
	Audio In	MIC	Audio In	1.9	U
PoE	RJ-45	Notebook	RJ-45	4.0	U

* Unshielded=U, Shielded=S

1.7 EUT Operating Mode(s)

Equipment under test was operated during the measurement under the following conditions:


Test mode	Normal operating
OP	MONITORING Network ping test

- Input power condition during the measurements was 12 V (dc) , PoE


1.8 Configuration

■ AC Main
□ DC Main

- DC 12 V Mode

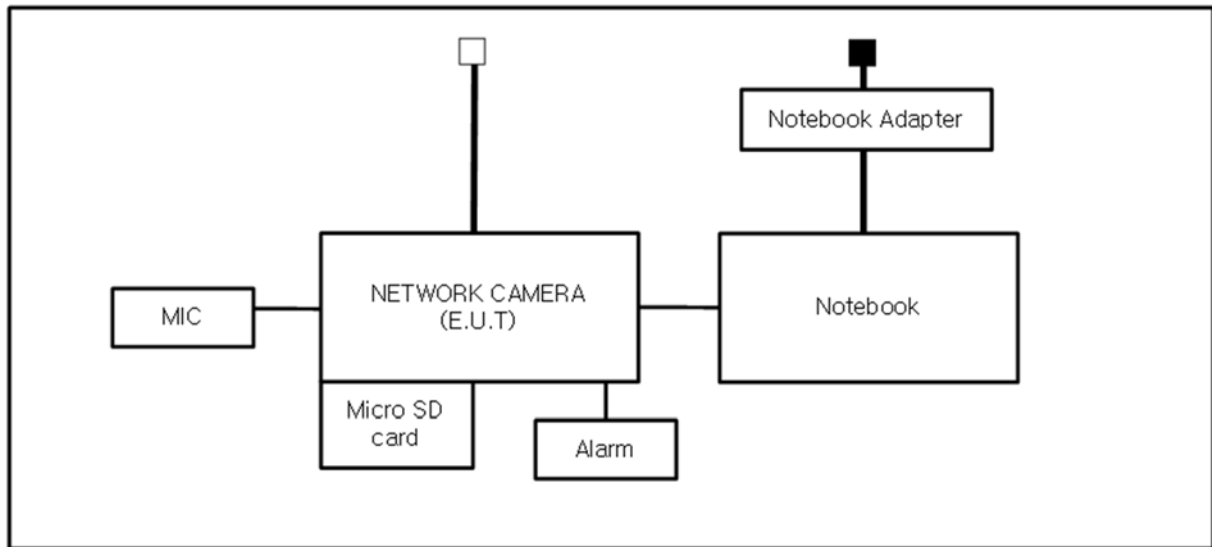

- PoE Mode

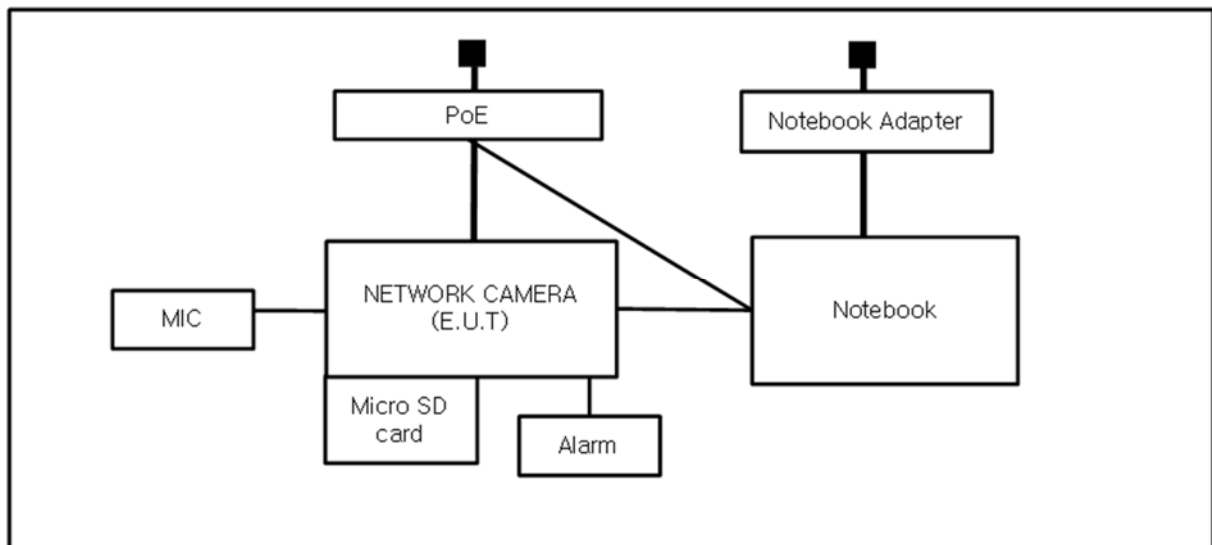







1.9 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.10 Test Facility

The measurement facility is located at 473-29 Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22.

1.11 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3 & 10 meter Open Area Test Sites and one conducted site to perform FCC Part 15/18 measurements.	
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-4308, C-4798, T-2311, G-914
KOREA	MSIP	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
Canada	IC	3 & 10 meter Open Area Test Sites and one conducted site	 4769B-1
Europe	CE	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	
International	KOLAS	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	

2.0 Test Regulations

The emissions tests were performed according to following regulations:

☐ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1
☐ Class A

☐ Group 2
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 55022:2010

☐ Class A

☐ Class B

☐ EN 55024:2010

☐ EN 50130-4:2011 +A1:2014

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013

☐ VCCI V-3/2013.04

☐ Class A

☐ Class B

☒ AS/NZS CISPR22:2009 +A1:2010

☒ Class A

☐ Class B

☐ 47 CFR Part 15, Subpart B / ANSI C63.4-2009

☐ Class A

☐ Class B

☐ IC Regulation ICES-003 : 2012
/ ANSI C63.4-2014

☐ Class A

☐ Class B

☐ CISPR 22:2009 +A1:2010

☐ Class A

☐ Class B



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0213
Page (11) of (43)

☐ **R&TTE- Directive 1999/5/EC**

☐ EN 301 489-1 V1.9.2

- ☐ Equipment for fixed use
- ☐ Equipment for vehicular use
- ☐ Equipment for portable use

☐ EN 301 489-3 V1.6.1

☐ EN 301 489-17 V2.2.1

☐ EN 60945:2002

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



2.1 Conducted Emissions at Mains Power Ports

Test Date

N/A

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input type="checkbox"/>	EMI Test Receiver	ESR3	R & S	101783	05, 03, 2017
<input type="checkbox"/>	LISN	ENV216	R & S	101137	02, 04, 2017
<input type="checkbox"/>	LISN	ENV216	R & S	101786	05, 02, 2017
<input type="checkbox"/>	Electro wave Shieldroom	-	AONE SHIELD	-	-

Test Conditions

Temperature: °C
Relative Humidity: %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

TestResults

The requirements are:

- ☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

Remarks

Beacause the E.U.T power is 12 V (dc) power and PoE, limits are not specified

2.2 Conducted Emissions at Telecommunication Ports

Test Date

May. 09, 2016

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test Receiver	ESR3	R & S	101783	05, 03, 2017
<input checked="" type="checkbox"/>	LISN	ENV216	R & S	101137	02. 04. 2017
<input checked="" type="checkbox"/>	LISN	ENV216	R & S	101786	05, 02, 2017
<input checked="" type="checkbox"/>	8-Wire ISN CAT3	CAT3 8158	Schwarzbeck Mess	8158-0019	04. 01. 2017
<input checked="" type="checkbox"/>	8-Wire ISN CAT5	CAT5 8158	Schwarzbeck Mess	8158-0030	04. 01. 2016
<input type="checkbox"/>	8-Wire ISN CAT6	NTFM 8158	Schwarzbeck Mess	8158-0029	08. 14. 2016
<input checked="" type="checkbox"/>	Electro wave Shieldroom	-	SEMITEC	-	-

Test Conditions

Temperature: 25,7 °C

Relative Humidity: 39,7 %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

May. 09, 2016

Test Location

☐ Open Area Test Site #1 ☒ Open Area Test Site #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test Receiver	ESR3	R&S	101781	05, 03, 2017
<input checked="" type="checkbox"/>	Trilog-Broadband Antenna	VULB 9163	SCHWARZBECK	9168-713	05, 15, 2017
<input checked="" type="checkbox"/>	Open Area Test Site	-	KES	-	-
<input checked="" type="checkbox"/>	Antenna Mast	-	DAEIL EMC	-	-
<input checked="" type="checkbox"/>	Turn Table	-	DAEIL EMC	-	-

Test Conditions

Temperature: 27,4 °C

Relative Humidity: 28,0 %

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

May. 09, 2016

Test Location

Semi Anchoic Chamber #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test Receiver	ESU26	R&S	100551	04, 18, 2016
<input checked="" type="checkbox"/>	Broadband Coaxial Preamplifier	BBV 9718	Schwarzbeck Mess - Elektronik	9718-246	10. 23. 2016
<input checked="" type="checkbox"/>	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	05. 07. 2017
<input checked="" type="checkbox"/>	Semi Anchoic Chamber #2	-	SEMITEC	-	-
<input checked="" type="checkbox"/>	Antenna Mast	-	AUDIX	-	-
<input checked="" type="checkbox"/>	Turn Table	-	AUDIX	-	-

Test Conditions

Temperature: 25,7 °C
Relative Humidity: 39,7 %

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

[HOT]

N/A



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0213
Page (17) of (43)

[NEUTRAL]

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Conducted Emissions at Telecommunication Ports

- DC 12 V Mode

[10 Mbps]

Common Information

Test Description:

Model No.:

Mode


Operator Name:

Telecommunication Emission

QNO-7030RP

10 Mbps_DC 12 V

KES

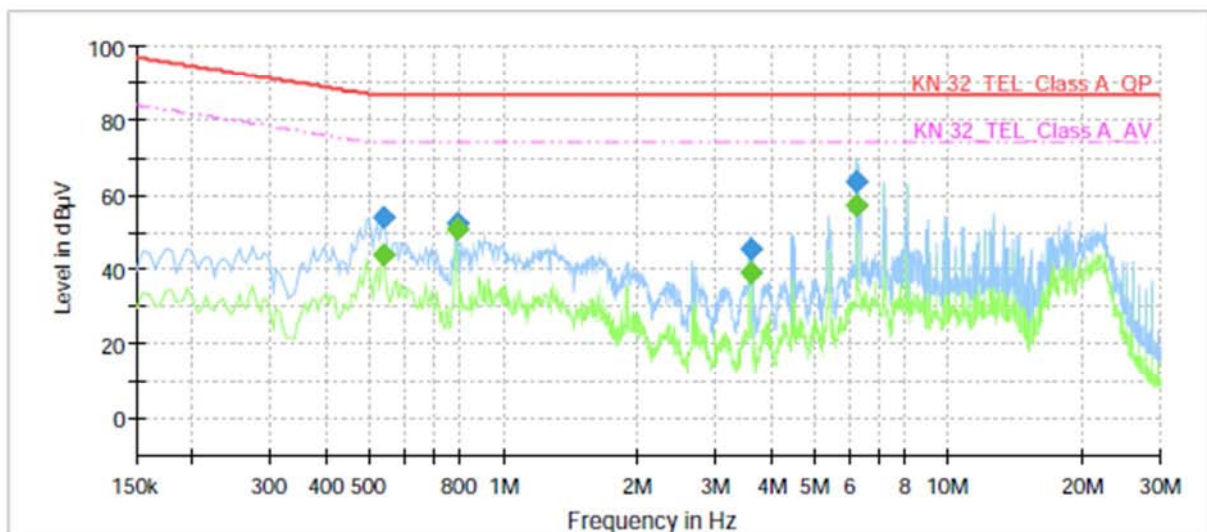


Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.540000	---	43.96	74.00	30.04	1000.0	9.000	Single Line	9.9
0.540000	54.05	---	87.00	32.95	1000.0	9.000	Single Line	9.9
0.785000	---	50.94	74.00	23.06	1000.0	9.000	Single Line	9.9
0.785000	52.50	---	87.00	34.50	1000.0	9.000	Single Line	9.9
3.585000	---	38.98	74.00	35.02	1000.0	9.000	Single Line	9.8
3.585000	45.72	---	87.00	41.28	1000.0	9.000	Single Line	9.8
6.250000	---	56.96	74.00	17.04	1000.0	9.000	Single Line	9.9
6.250000	63.36	---	87.00	23.64	1000.0	9.000	Single Line	9.9

[100 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	QNO-7030RP
Mode	100 Mbps_DC 12 V
Operator Name:	KES

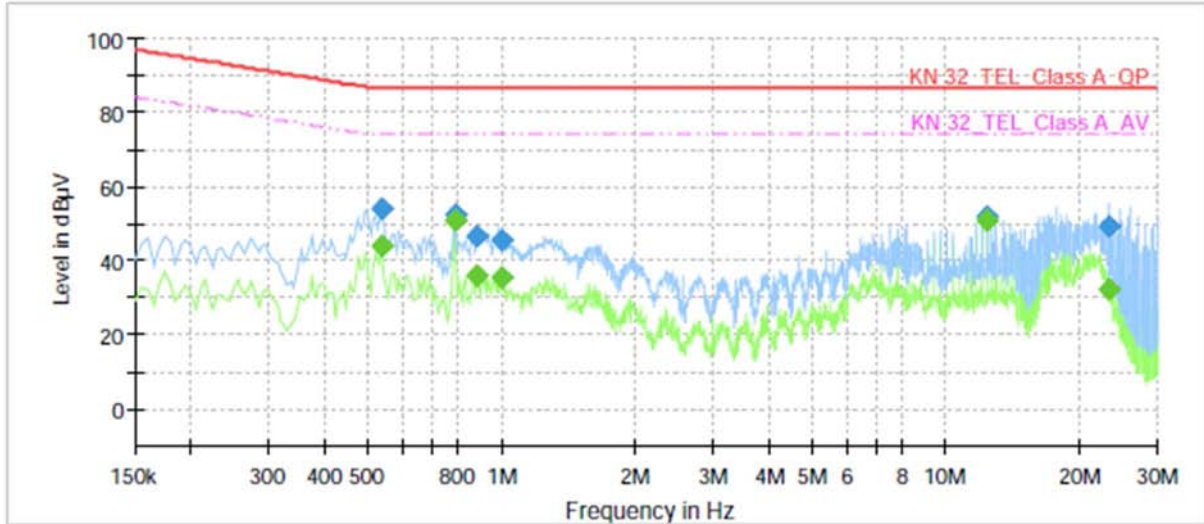

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.540000	---	43.98	74.00	30.02	1000.0	9.000	Single Line	9.5
0.540000	54.09	---	87.00	32.91	1000.0	9.000	Single Line	9.5
0.785000	---	50.67	74.00	23.33	1000.0	9.000	Single Line	9.4
0.785000	52.37	---	87.00	34.63	1000.0	9.000	Single Line	9.4
0.885000	---	36.12	74.00	37.88	1000.0	9.000	Single Line	9.4
0.885000	46.33	---	87.00	40.67	1000.0	9.000	Single Line	9.4
1.000000	---	35.61	74.00	38.39	1000.0	9.000	Single Line	9.4
1.000000	45.48	---	87.00	41.52	1000.0	9.000	Single Line	9.4
12.385000	---	51.07	74.00	22.93	1000.0	9.000	Single Line	9.6
12.385000	51.80	---	87.00	35.20	1000.0	9.000	Single Line	9.6
23.325000	---	32.39	74.00	41.61	1000.0	9.000	Single Line	9.5
23.325000	49.26	---	87.00	37.74	1000.0	9.000	Single Line	9.5

- PoE Mode

[10 Mbps]

Common Information

Test Description:

Model No.:

Mode


Operator Name:

Telecommunication Emission

QNO-7030RP

10 Mbps_PoE

KES

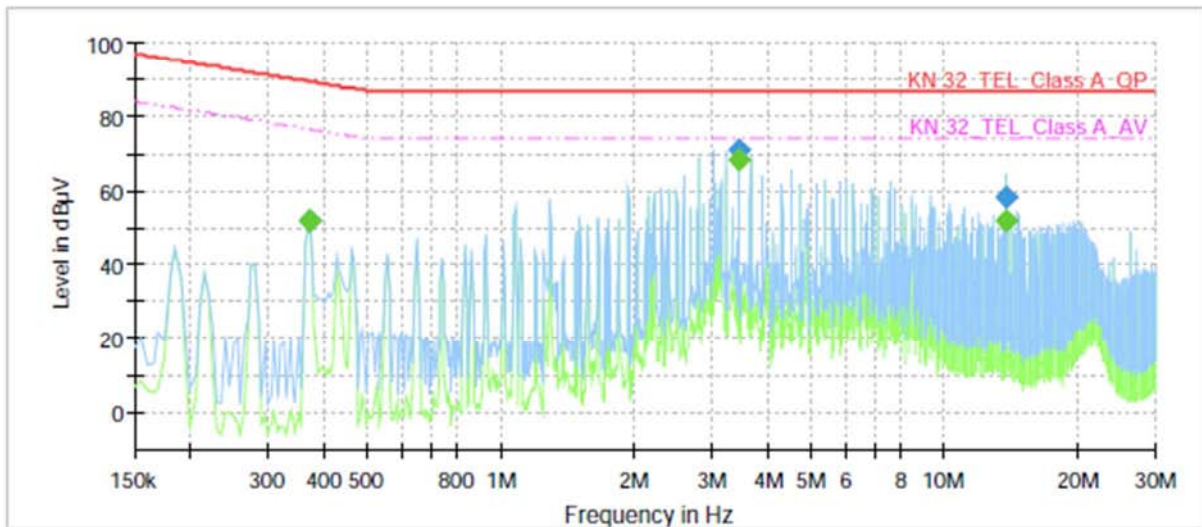


Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.370000	---	51.74	76.50	24.76	1000.0	9.000	Single Line	10.0
0.370000	51.79	---	89.50	37.71	1000.0	9.000	Single Line	10.0
3.450000	---	68.37	74.00	5.63	1000.0	9.000	Single Line	9.8
3.450000	70.76	---	87.00	16.24	1000.0	9.000	Single Line	9.8
13.750000	---	52.13	74.00	21.87	1000.0	9.000	Single Line	10.1
13.750000	58.19	---	87.00	28.81	1000.0	9.000	Single Line	10.1

[100 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	QNO-7030RP
Mode	100 Mbps_PoE
Operator Name:	KES

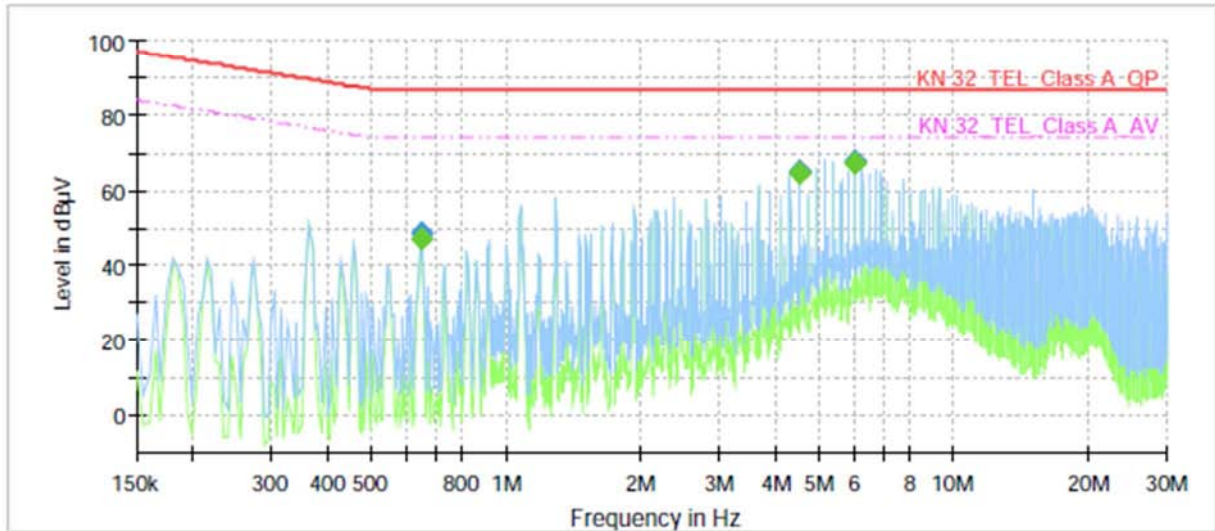

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.645000	---	47.20	74.00	26.80	1000.0	9.000	Single Line	9.4
0.645000	48.67	---	87.00	38.33	1000.0	9.000	Single Line	9.4
4.530000	---	64.63	74.00	9.37	1000.0	9.000	Single Line	9.3
4.530000	65.20	---	87.00	21.80	1000.0	9.000	Single Line	9.3
6.040000	---	67.40	74.00	6.60	1000.0	9.000	Single Line	9.4
6.040000	67.89	---	87.00	19.11	1000.0	9.000	Single Line	9.4

**Radiated Electric Field Emissions(Below 1 GHz)**

- DC 12 V Mode

Frequency	Amplitude	ANT	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin
[MHz]	[dB μ V]	Polar. (H/V)	[m]	ANT. [dB/m]	Cable [dB]	[dB μ V/m]	[dB μ V/m]	[dB]
230.44	6.81	H	4.00	11.98	3.59	22.38	47.00	24.62
250.44	6.53	V	1.12	12.42	3.80	22.75	47.00	24.25
264.22	7.14	H	3.90	12.69	3.92	23.75	47.00	23.25
309.54	6.75	V	1.10	13.60	4.30	24.65	47.00	22.35
408.12	8.43	H	4.00	15.81	5.10	29.34	47.00	17.66
448.71	6.78	V	1.20	16.38	5.39	28.55	47.00	18.45

* H : Horizontal, V : Vertical


- PoE Mode

Frequency	Amplitude	ANT	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin
[MHz]	[dB μ V]	Polar. (H/V)	[m]	ANT. [dB/m]	Cable [dB]	[dB μ V/m]	[dB μ V/m]	[dB]
168.48	6.78	V	1.20	8.92	2.93	18.63	40.00	21.37
270.49	7.16	H	4.00	12.81	3.97	23.94	47.00	23.06
408.46	6.52	H	3.90	15.82	5.10	27.44	47.00	19.56
448.22	6.10	V	1.00	16.38	5.38	27.86	47.00	19.14
456.77	7.24	H	4.00	16.49	5.44	29.17	47.00	17.83
594.89	7.33	V	1.10	19.19	6.29	32.81	47.00	14.19

* H : Horizontal, V : Vertical

Radiated Electric Field Emissions(Above 1 GHz)

- DC 12 V Mode

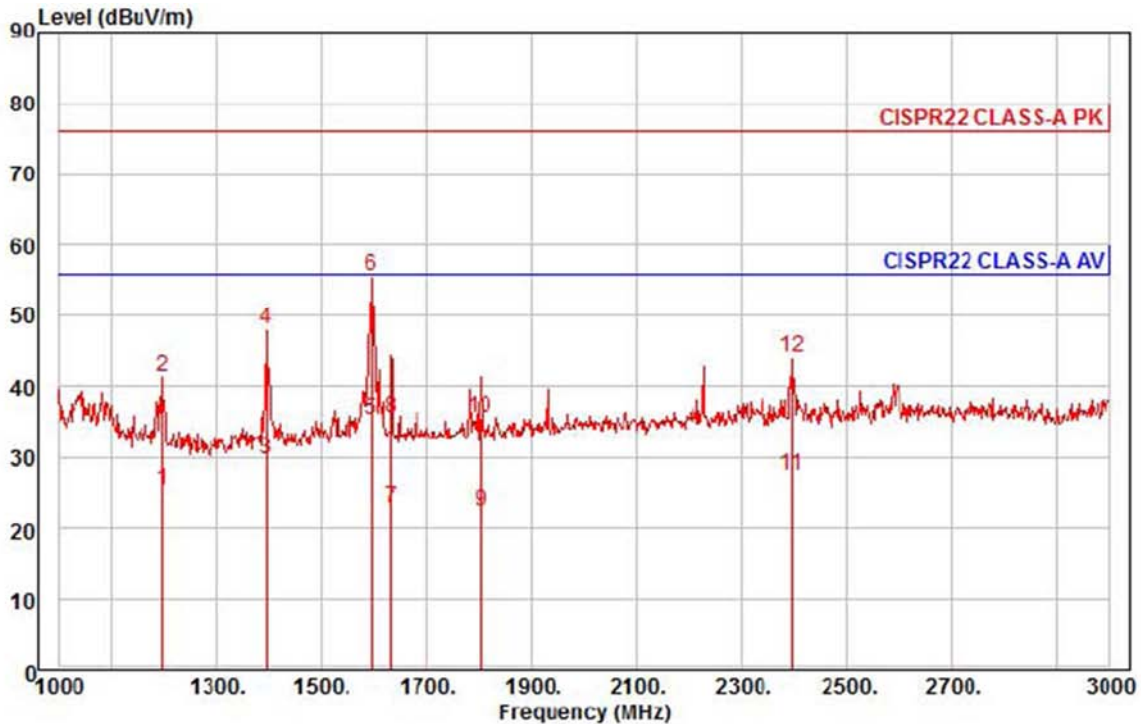

Site : chamber

Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal

: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto

Project :

Model : QNO-7030RP

Mode : DC 12 V

Memo :

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1198.00	33.73	24.70	7.08	40.02	138	56.00	-30.51	horizontal	Average
2	1198.00	49.63	24.70	7.08	40.02	138	76.00	-34.61	horizontal	Peak
3	1394.00	36.41	25.47	7.65	39.93	121	56.00	-26.40	horizontal	Average
4	1394.00	54.87	25.47	7.65	39.93	121	76.00	-27.94	horizontal	Peak
5 av	1596.00	40.73	26.28	8.24	39.83	92	56.00	-20.58	horizontal	Average
6 pp	1596.00	60.87	26.28	8.24	39.83	92	76.00	-20.44	horizontal	Peak
7	1632.00	28.10	26.42	8.34	39.81	161	56.00	-32.95	horizontal	Average
8	1632.00	40.61	26.42	8.34	39.81	161	76.00	-40.44	horizontal	Peak
9	1802.00	26.38	27.09	8.81	39.73	23	56.00	-33.45	horizontal	Average
10	1802.00	39.35	27.09	8.81	39.73	23	76.00	-40.48	horizontal	Peak
11	2396.00	28.54	28.85	9.96	39.86	124	56.00	-28.51	horizontal	Average
12	2396.00	45.23	28.85	9.96	39.86	124	76.00	-31.82	horizontal	Peak

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.




KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0213

Page (24) of (43)

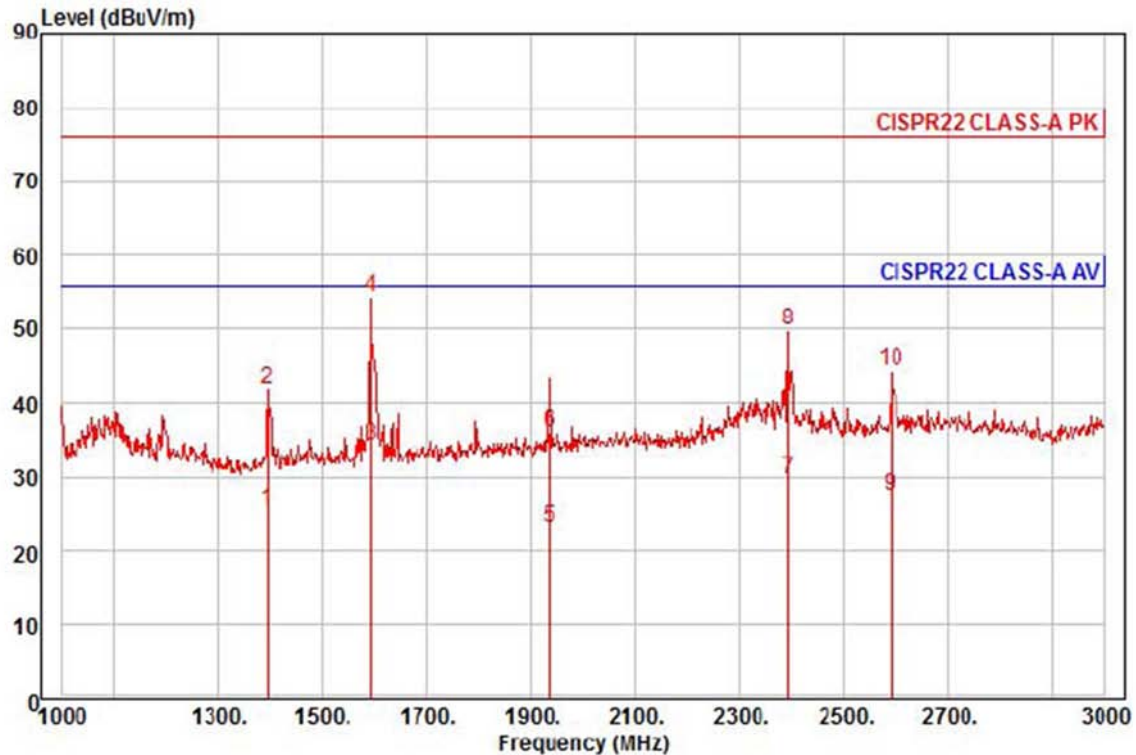

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : QNO-7030RP
Mode : DC 12 V
Memo :

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1394.00	32.25	25.47	7.65	39.93	221	56.00	-30.56	vertical	Average
2	1394.00	48.84	25.47	7.65	39.93	221	76.00	-33.97	vertical	Peak
3 av	1594.00	39.78	26.27	8.23	39.83	45	56.00	-21.55	vertical	Average
4 pp	1594.00	59.89	26.27	8.23	39.83	45	76.00	-21.44	vertical	Peak
5	1934.00	26.11	27.62	9.17	39.66	175	56.00	-32.76	vertical	Average
6	1934.00	38.90	27.62	9.17	39.66	175	76.00	-39.97	vertical	Peak
7	2394.00	30.85	28.85	9.95	39.86	224	56.00	-26.21	vertical	Average
8	2394.00	50.93	28.85	9.95	39.86	224	76.00	-26.13	vertical	Peak
9	2590.00	27.74	29.33	10.25	39.97	36	56.00	-28.65	vertical	Average
10	2590.00	44.79	29.33	10.25	39.97	36	76.00	-31.60	vertical	Peak


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0213
Page (25) of (43)

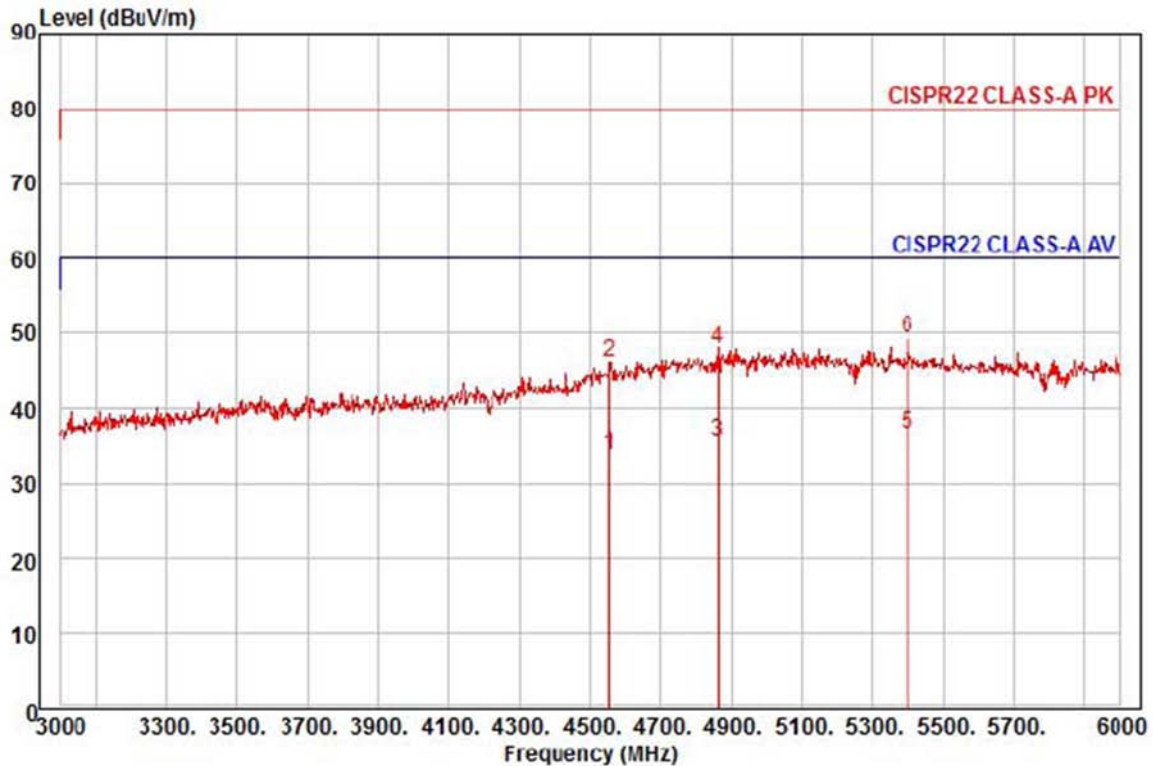

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : QNO-7030RP
Mode : DC 12 V
Memo :

	Freq	Read Level	Ant Factor	Cable Loss	Preamplifier Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	4554.00	24.62	35.17	14.53	40.41	354	60.00	-26.09	horizontal	Average
2	4554.00	36.88	35.17	14.53	40.41	354	80.00	-33.83	horizontal	Peak
3	4863.00	24.07	36.94	15.08	40.41	232	60.00	-24.32	horizontal	Average
4	4863.00	36.33	36.94	15.08	40.41	232	80.00	-32.06	horizontal	Peak
5 pp	5400.00	24.13	36.91	15.80	40.35	230	60.00	-23.51	horizontal	Average
6 pk	5400.00	36.83	36.91	15.80	40.35	230	80.00	-30.81	horizontal	Peak


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0213
Page (26) of (43)

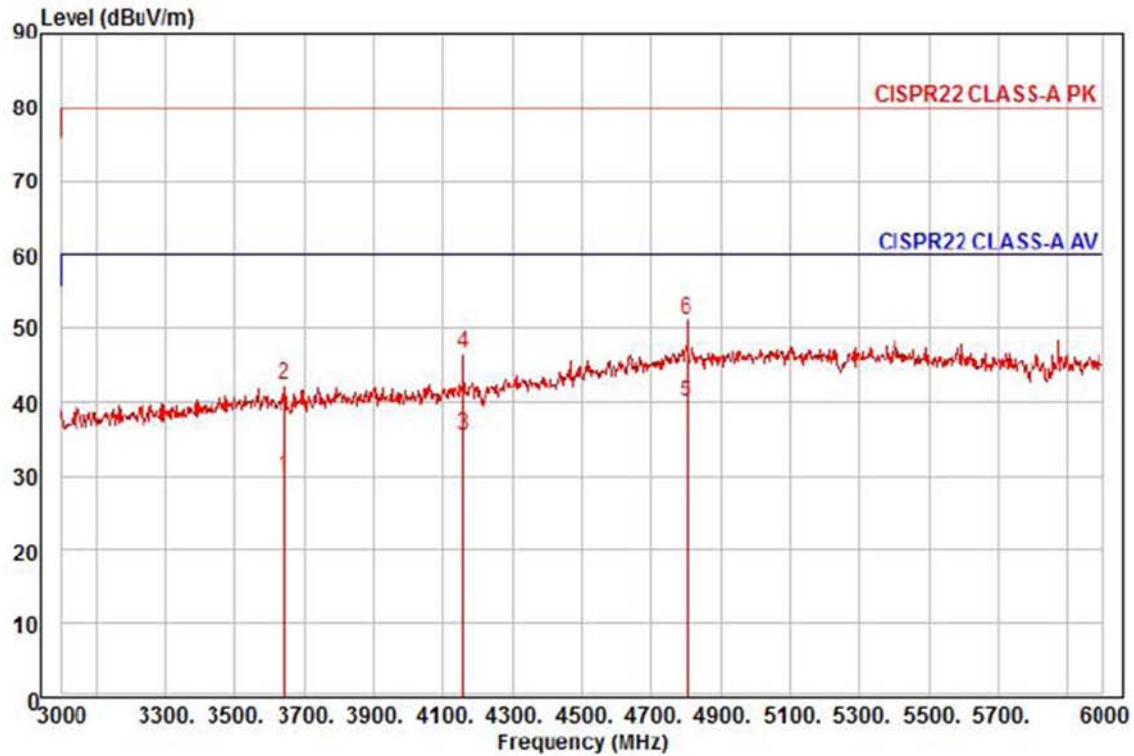


Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : QNO-7030RP
Mode : DC 12 V
Memo :

	Freq	Read Level	Ant Factor	Cable Loss	Preamplifier Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3642.00	25.99	31.41	12.79	40.34	245	60.00	-30.15	vertical	Average
2	3642.00	38.59	31.41	12.79	40.34	245	80.00	-37.55	vertical	Peak
3	4158.00	29.37	32.91	13.80	40.41	222	60.00	-24.33	vertical	Average
4	4158.00	40.33	32.91	13.80	40.41	222	80.00	-33.37	vertical	Peak
5 pp	4800.00	28.92	36.58	14.97	40.41	216	60.00	-19.94	vertical	Average
6 pk	4800.00	40.08	36.58	14.97	40.41	216	80.00	-28.78	vertical	Peak

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



- PoE Mode

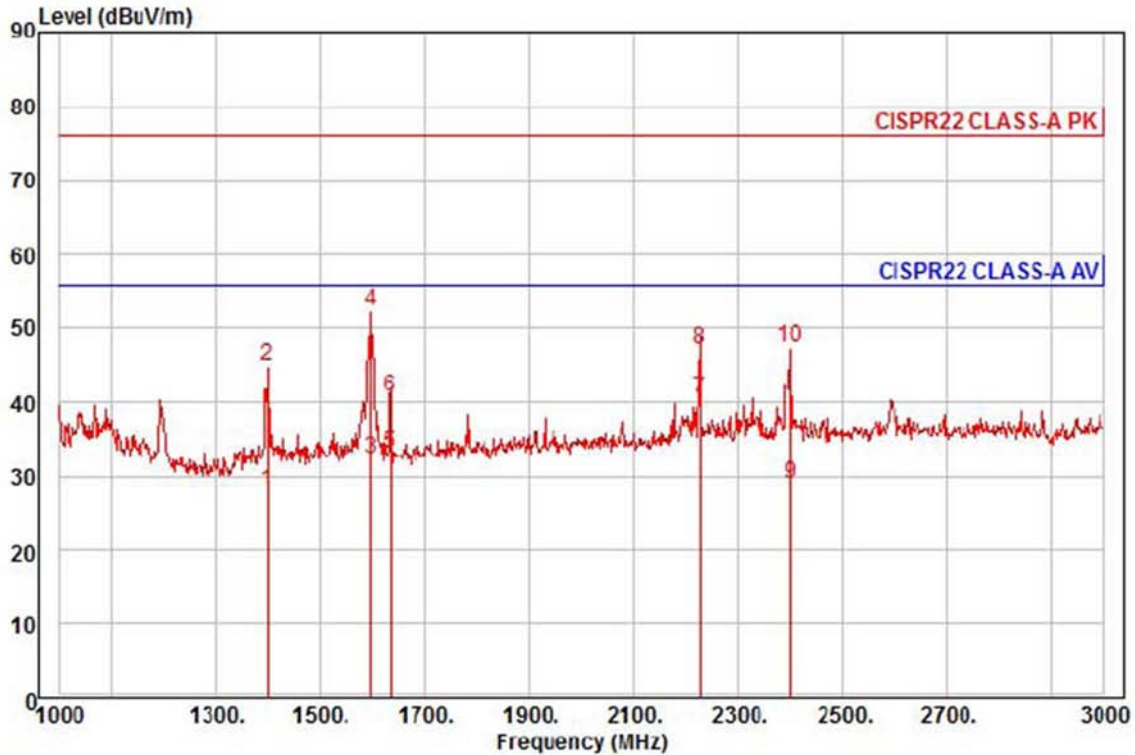

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : QNO-7030RP
Mode : PoE
Memo :


	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1398.00	34.63	25.49	7.66	39.92	111	56.00	-28.14	horizontal	Average
2	1398.00	51.72	25.49	7.66	39.92	111	76.00	-31.05	horizontal	Peak
3	1598.00	37.70	26.28	8.24	39.83	278	56.00	-23.61	horizontal	Average
4 pk	1598.00	57.67	26.28	8.24	39.83	278	76.00	-23.64	horizontal	Peak
5	1634.00	38.18	26.43	8.34	39.81	169	56.00	-22.86	horizontal	Average
6	1634.00	45.66	26.43	8.34	39.81	169	76.00	-35.38	horizontal	Peak
7 pp	2228.00	42.17	28.44	9.70	39.76	121	56.00	-15.45	horizontal	Average
8	2228.00	48.75	28.44	9.70	39.76	121	76.00	-28.87	horizontal	Peak
9	2400.00	30.08	28.86	9.96	39.86	95	56.00	-26.96	horizontal	Average
10	2400.00	48.49	28.86	9.96	39.86	95	76.00	-28.55	horizontal	Peak



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0213
Page (28) of (43)

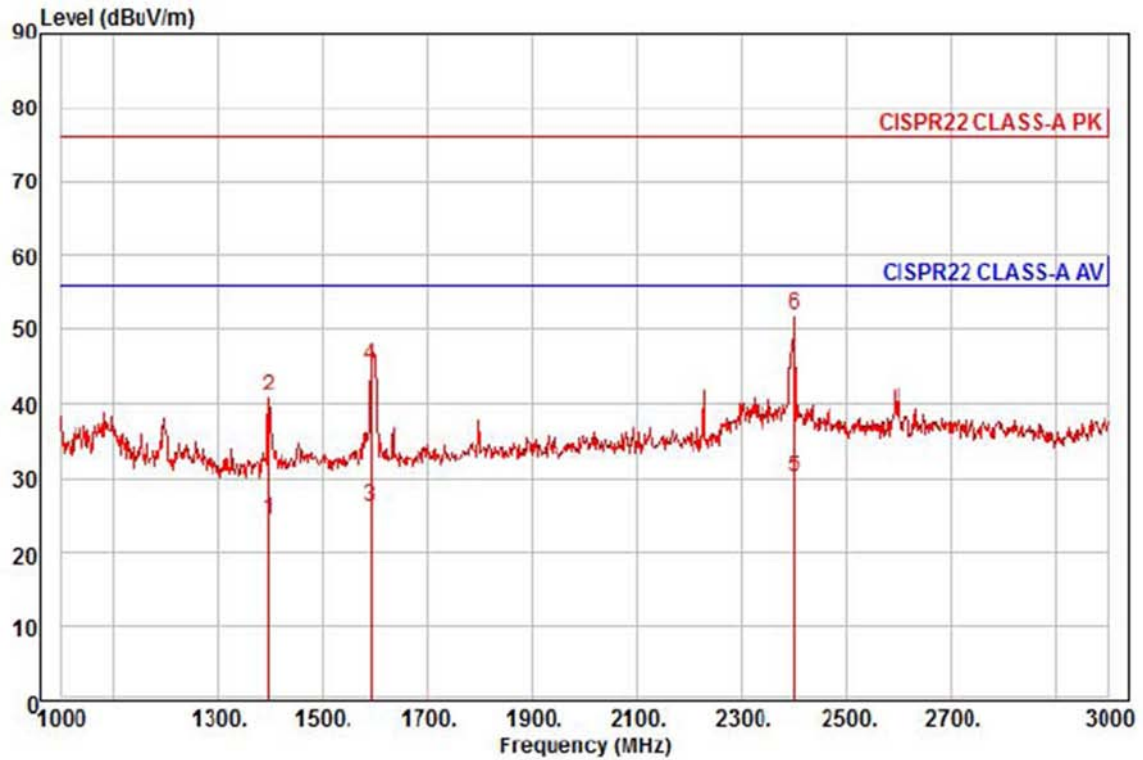

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : QNO-7030RP
Mode : PoE
Memo :

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1396.00	31.43	25.48	7.66	39.93	232	56.00	-31.36	vertical	Average
2	1396.00	47.79	25.48	7.66	39.93	232	76.00	-35.00	vertical	Peak
3	1592.00	31.63	26.26	8.23	39.83	53	56.00	-29.71	vertical	Average
4	1592.00	50.37	26.26	8.23	39.83	53	76.00	-30.97	vertical	Peak
5 av	2400.00	31.21	28.86	9.96	39.86	220	56.00	-25.83	vertical	Average
6 pp	2400.00	53.03	28.86	9.96	39.86	220	76.00	-24.01	vertical	Peak


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0213
Page (29) of (43)

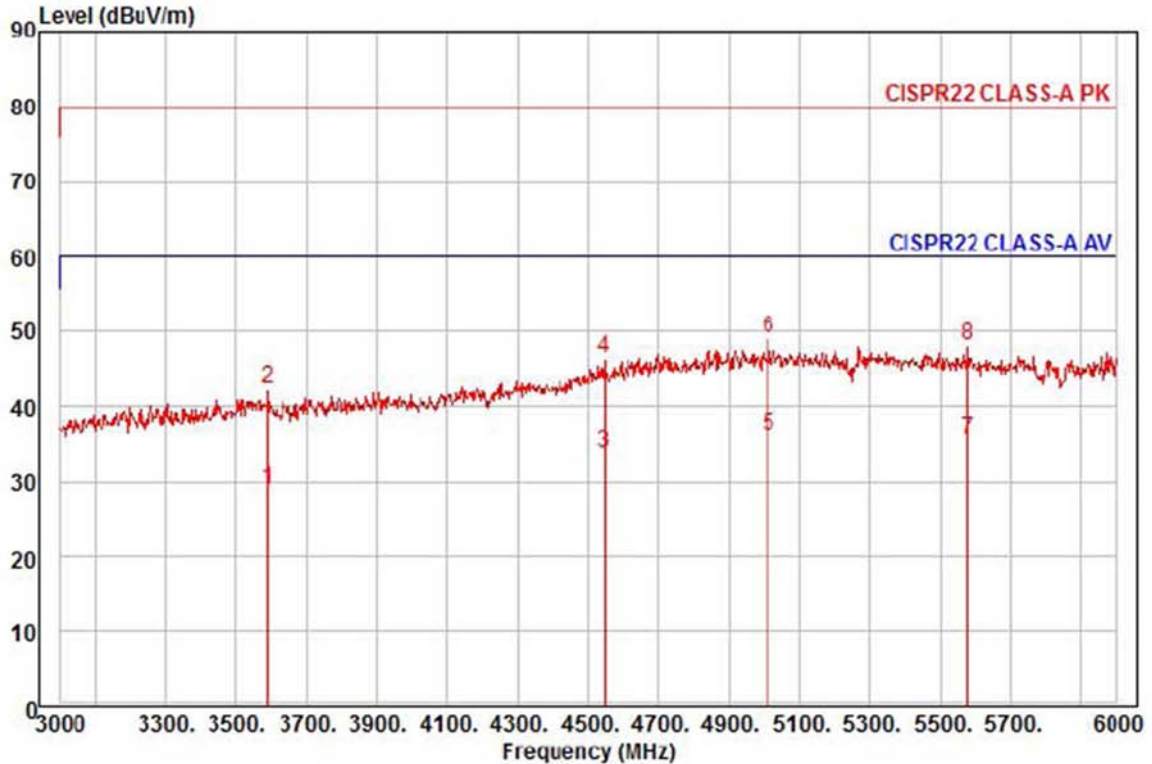

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : QNO-7030RP
Mode : PoE
Memo :

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3588.00	25.23	31.32	12.69	40.33	243	60.00	-31.09	horizontal	Average
2	3588.00	38.65	31.32	12.69	40.33	243	80.00	-37.67	horizontal	Peak
3	4545.00	24.72	35.12	14.51	40.41	79	60.00	-26.06	horizontal	Average
4	4545.00	37.10	35.12	14.51	40.41	79	80.00	-33.68	horizontal	Peak
5 pp	5013.00	23.50	37.69	15.35	40.41	116	60.00	-23.87	horizontal	Average
6 pk	5013.00	36.47	37.69	15.35	40.41	116	80.00	-30.90	horizontal	Peak
7	5577.00	23.16	36.55	16.06	40.33	56	60.00	-24.56	horizontal	Average
8	5577.00	35.75	36.55	16.06	40.33	56	80.00	-31.97	horizontal	Peak


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0213
Page (30) of (43)

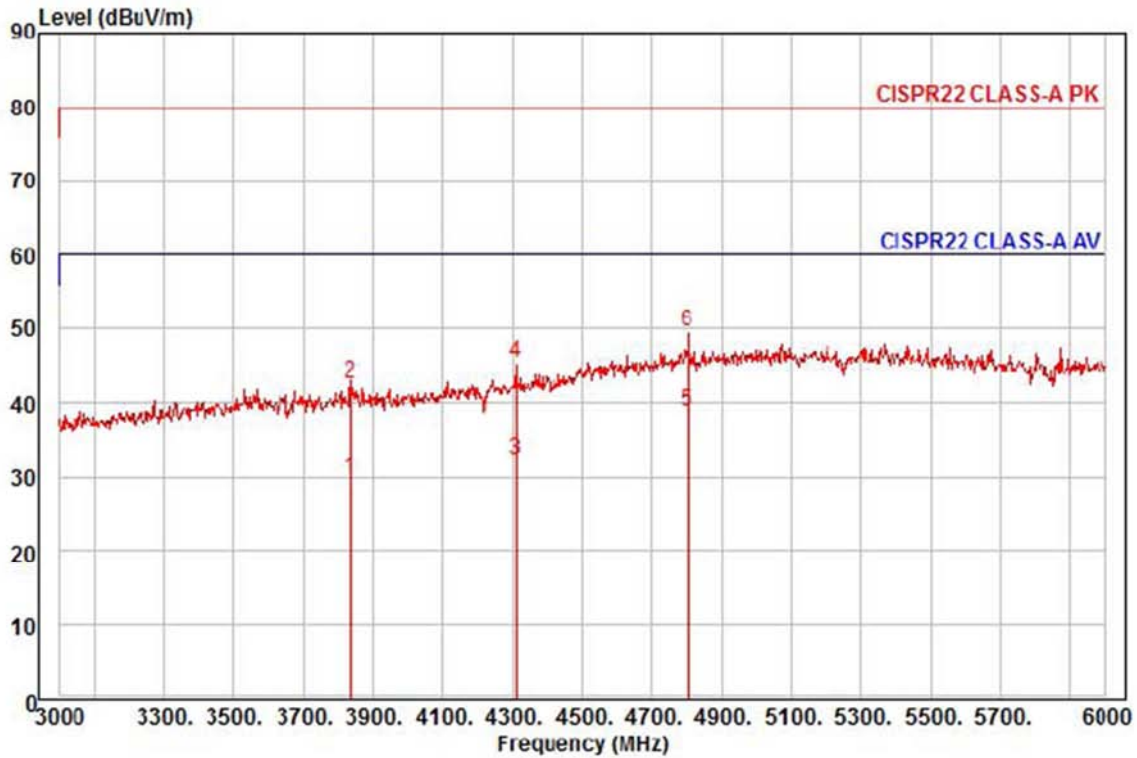

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project :
Model : QNO-7030RP
Mode : PoE
Memo :

	Freq	Read Level	Ant Factor	Cable Loss	Preamplifier Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3837.00	25.22	31.74	13.18	40.38	230	60.00	-30.24	vertical	Average
2	3837.00	38.07	31.74	13.18	40.38	230	80.00	-37.39	vertical	Peak
3	4311.00	24.81	33.79	14.08	40.41	311	60.00	-27.73	vertical	Average
4	4311.00	37.98	33.79	14.08	40.41	311	80.00	-34.56	vertical	Peak
5 pp	4800.00	27.50	36.58	14.97	40.41	198	60.00	-21.36	vertical	Average
6 pk	4800.00	38.48	36.58	14.97	40.41	198	80.00	-30.38	vertical	Peak

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



Test Setup Photos and Configuration


Conducted Voltage Emissions

N/A

N/A

Conducted Telecommunication Emissions

- DC 12 V Mode

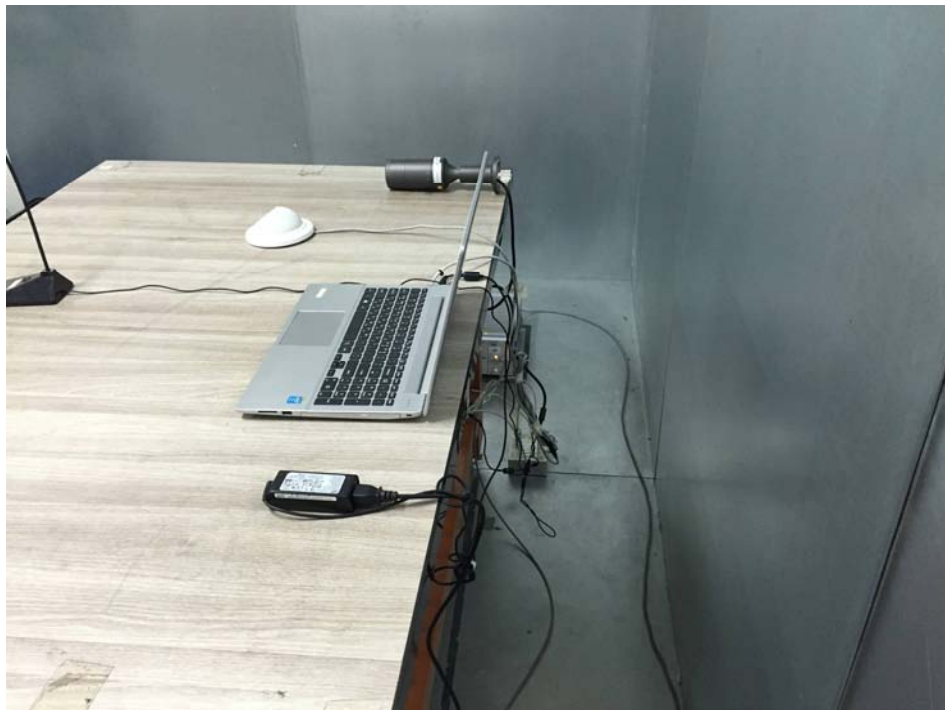

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


- PoE Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Radiated Electric Field Emissions(Below 1 GHz)

- DC 12 V Mode

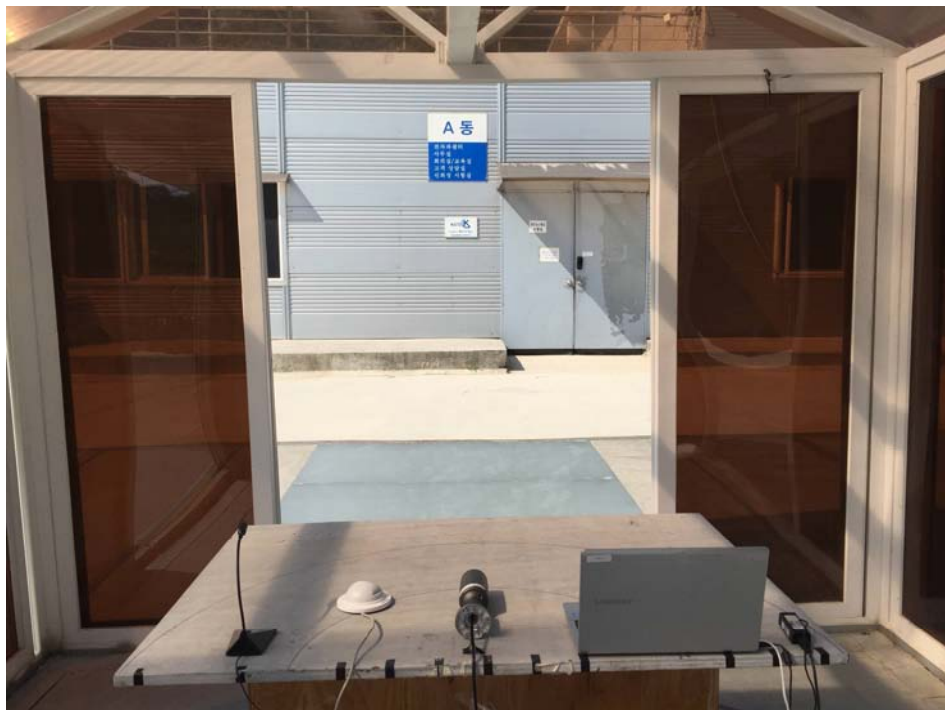

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


- PoE Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


Radiated Electric Field Emissions(Above 1 GHz)

- DC 12 V Mode

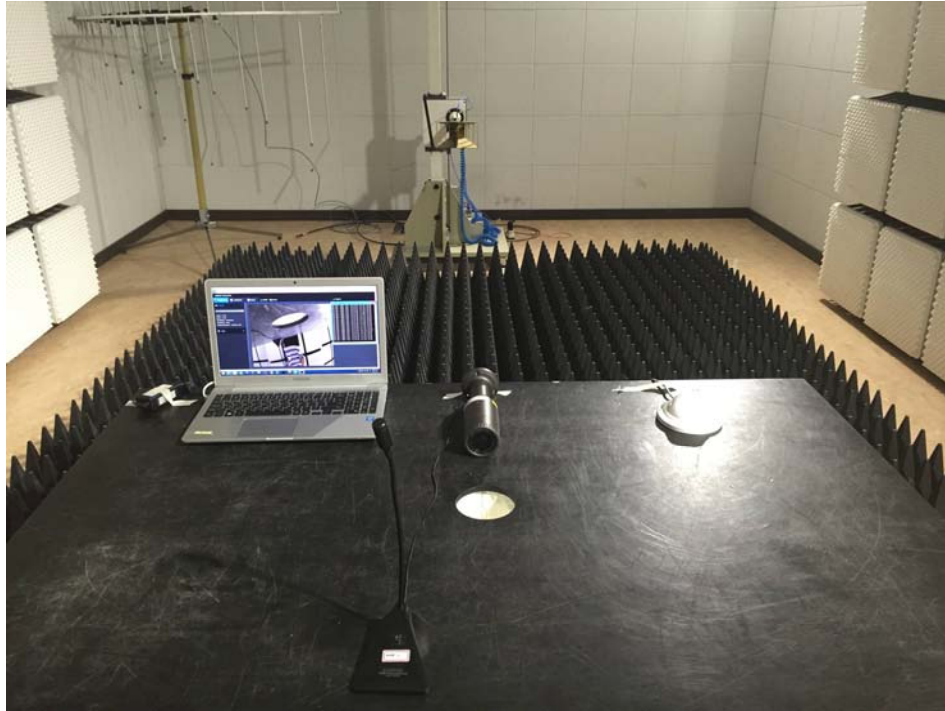

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- PoE Mode

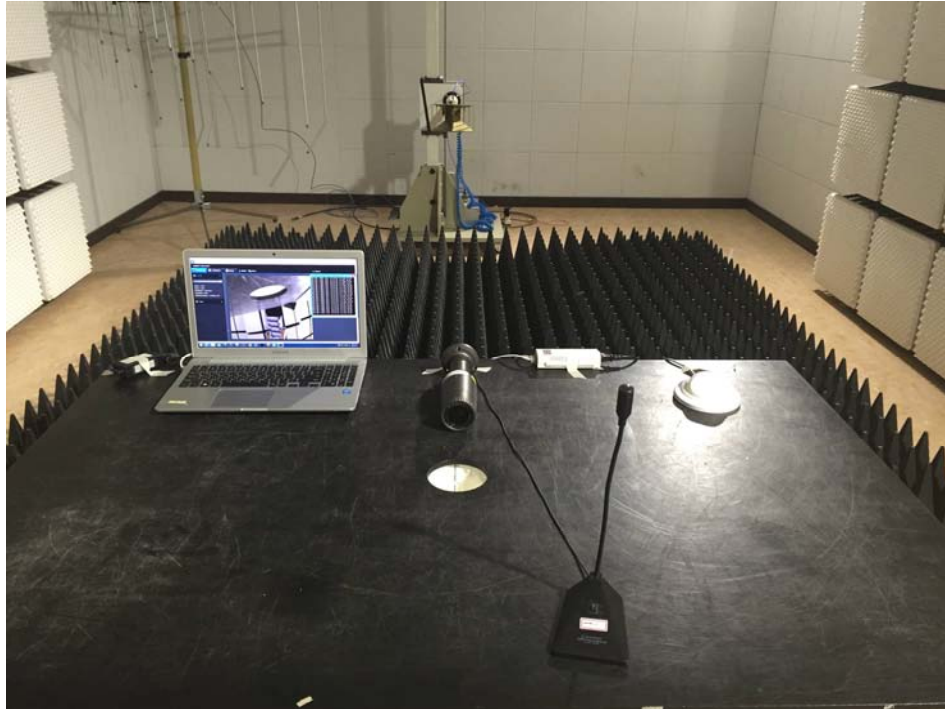

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal Photographs

(Internal View)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Main Board EUT Internal View – Main Board

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Main Board EUT Internal View – Sub Board1

(Top)



(Bottom)




Main Board EUT Internal View – Sub Board2

(Top)



(Bottom)

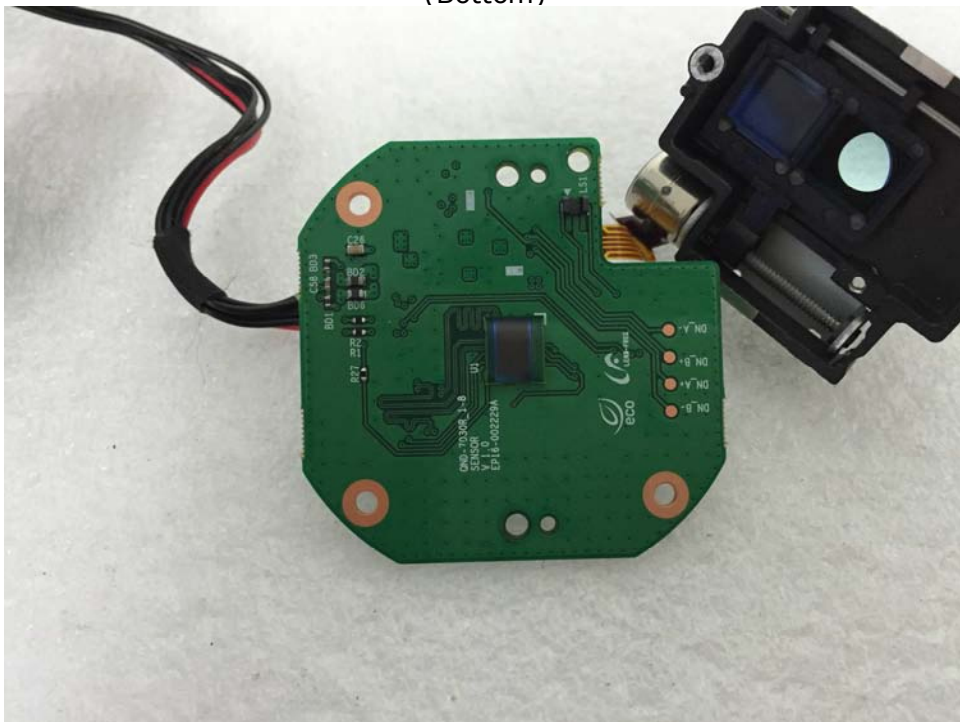


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Main Board EUT Internal View – Sub Board3

(Top)



(Bottom)

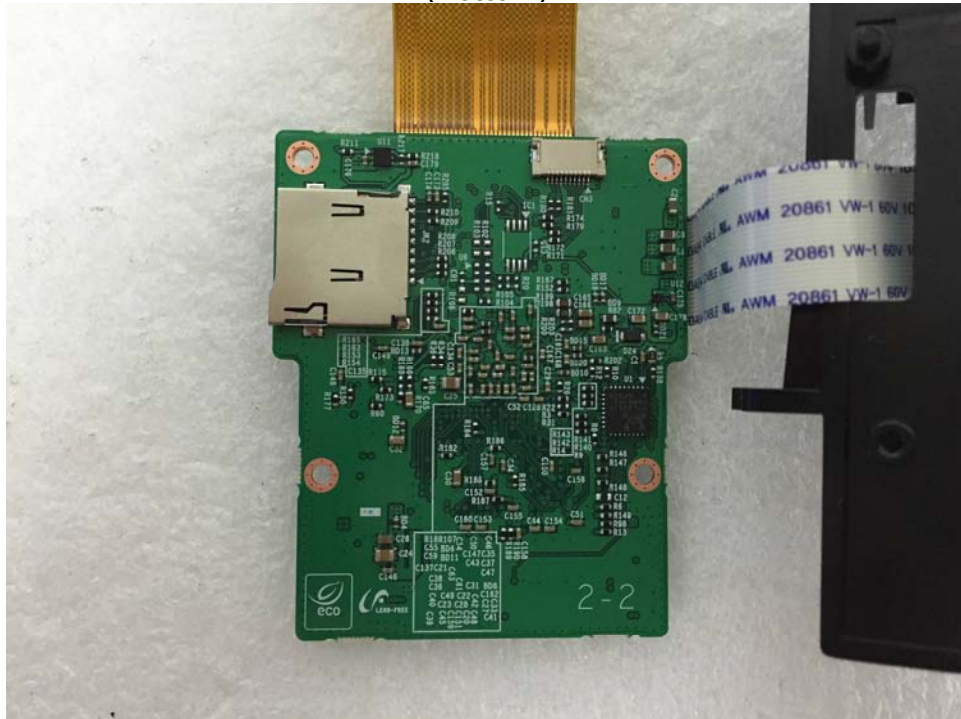

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.