



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-20T0857-R2

Page (1) of (65)

EMC TEST REPORT For CE

Test Report No. : KES-EM-20T0857-R2
Date of Issue : Feb. 24, 2023
Product name : NETWORK CAMERA
Model/Type No. : XNP-6400
Variant Model : -
Applicant : Hanwha Vision Co., Ltd
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,
Gyeonggi-do, Republic of Korea
Manufacturer : 1. HANWHA VISION VIETNAM COMPANY LIMITED
2. D-TECH CO.,LTD.
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,
Korea (Suwon Industrial Complex)
Date of Receipt : Nov. 04, 2020
Test date : Nov. 13, 2020 ~ Nov. 18, 2020
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Dong Hyun, Won
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-EM-20T0857-R2
Page (2) of (65)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Nov. 27, 2020	KES-EM-20T0857	Issued
Jan. 15, 2021	KES-EM-20T0857-R1	Issued
Feb. 24, 2023	KES-EM-20T0857-R2	Change the Applicant and Manufacturer at the request of the customer

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



TABLE OF CONTENTS

1.0	General Product Description	4
1.1	Test Voltage & Frequency	6
1.2	Variant Model Differences.....	6
1.3	Device Modifications	6
1.4	Equipment Under Test.....	6
1.5	Support Equipments	6
1.6	External I/O Cabling	7
1.7	EUT Operating Mode(s)	7
1.8	Configuration.....	8
1.9	Remarks when standards applied	9
1.10	Calibration Details of Equipment Used for Measurement	9
1.11	Test Facility	9
1.12	Laboratory Accreditations and Listings	9
2.0	Test Regulations.....	10
2.1	Conducted Emissions at Mains Power Ports	11
2.2	Conducted Emissions at Telecommunication Ports	12
2.3	Radiated Electric Field Emissions(Below 1 GHz)	13
2.4	Radiated Electric Field Emissions(Above 1 GHz)	14
2.5	Harmonic Current Emissions	15
2.6	Voltage Fluctuations and Flicker	16
3.0	Criteria for compliance	17
3.1	Electrostatic Discharge.....	19
3.2	Radiated Electric Field Immunity	23
3.3	Electrical Fast Transients/Bursts	26
3.4	Surge Transients	28
3.5	Conducted Disturbance	31
3.6	Voltage Dips and Short Interruptions	33
APPENDIX A – TEST DATA.....		35
Conducted Emissions at Mains Power Ports.....		35
Conducted Emissions at Telecommunication Ports		37
Radiated Electric Field Emissions(Below 1 GHz)		38
Radiated Electric Field Emissions(Above 1 GHz)		39
Harmonic Current Emissions and Voltage Fluctuations and Flicker		40
Test Setup Photos and Configuration		43
Conducted Emissions at Mains Power Ports.....		43
Conducted Emissions at Telecommunication Ports		44
Radiated Electric Field Emissions(Below 1 GHz)		45
Radiated Electric Field Emissions(Above 1 GHz)		46
Harmonic Current Emissions and Voltage Fluctuations and Flicker		47
Electrostatic Discharge		48
Radiated Electric Field Immunity		48
Electrical Fast Transients/Bursts		49
Surge Transients.....		49
Conducted Disturbance.....		50
Voltage Dips and Short Interruptions.....		50
EUT External Photographs		51
EUT Internal Photographs		52



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-20T0857-R2

Page (4) of (65)

1.0 General Product Description

Main Specifications of EUT are:

Video	
Imaging Device	1/2.8" 2MP CMOS
Effective Pixels	1944(H)x1212(V)
Min. Illumination	Color: 0.05Lux(F1.6, 1/30sec) BW: 0.005Lux(F1.6, 1/30sec)
Video Out	None
Lens	
Focal Length (Zoom Ratio)	4.25~170mm(40x) zoom
Max. Aperture Ratio	F1.6(Wide)~F4.95(Tele)
Angular Field of View	H: 65.66°(Wide)~1.88°(Tele) / V: 39.40°(Wide)~1.09°(Tele)
Min. Object Distance	5m(16.4ft)
Focus Control	Oneshot AF, Focus save
Lens Type	DC auto iris
Pan / Tilt / Rotate	
Pan Range	360° Endless
Pan Speed	Max. 700°/sec, Manual: 0.024°/sec~250°/sec
Tilt Range	110°(-20°~90°)
Tilt Speed	Max. 500°/sec, Manual: 0.024°/sec~250°/sec
Sequence	Preset(300ea), Swing, Group(6ea), Trace, Tour, Auto Run, Schedule, Preset trace recording
Preset Accuracy	±0.1°(±20°C by temperature at preset setting) / ±0.2°(other temperature)
Azimuth	Support
Auto Tracking	Object auto tracking(Person/Vehicle)
Operational	
IR Viewable Length	None
Camera Title	Displayed up to 85 characters, Direction Indicator
Day & Night	Auto(ICR)/Color/BW/Schedule
Backlight Compensation	BLC, HLC, WDR
Wide Dynamic Range	150 dB
Digital Noise Reduction	SSNRV
Digital Image Stabilization	Support(built-in gyro sensor)
Defog	Support
Motion Detection	8ea, 8point polygonal zones
Privacy Masking	32ea, polygonal Support - Color: Grey/Green/Red/Blue/Black/White - Mosaic
Gain Control	Manual / Max
White Balance	ATW, NARROW ATW, Manual, AWC, OUTDOOR, INDOOR, MERCURY, SODIUM
LDC	None
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (2~1/12,000sec)
Video Rotation	Flip&Mirror
Analytics	Directional detection, Fog detection, Face detection, Motion detection, Appear/Disappear, Enter/Exit, Loitering, Tampering, Virtual line, Shock detection * Audio detection, Sound classification(with NW I/O Box)
Business Intelligence	None
Serial Interface	None
Alarm I/O	None
Alarm Triggers	Analytics, Network disconnect * Alarm input(with NW I/O Box)
Alarm Events	File upload via FTP and e-mail Notification via e-mail SD/SDHC/SDXC or NAS recording at event triggers PTZ Preset * Alarm output(with NW I/O Box)
Audio In	None
Audio Out	None
Wiper / Waterdrop removal	Spinning Dry, Heat film

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-20T0857-R2

Page (5) of (65)

Network	
Ethernet	RJ-45(10/100BASE-T)
Video Compression	H.265/H.264,MJPEG
Resolution	1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240
Max. Framerate	H.265/H.264: Max. 60fps/50fps(60Hz/50Hz) MJPEG: Max. 30fps/25fps(60Hz/50Hz)
Smart Codec	Manual(Sea area), WiseStreamII
Video Quality Adjustment	H.264/H.265: Target bitrate level control MJPEG: Target bitrate level control
Bitrate Control	H.264/H.265: CBR or VBR MJPEG: VBR
Streaming	Unicast(20 users) / Multicast (128 user) Multiple streaming(Up to 10 profiles)
Audio Compression	None
Protocol	IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP,RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour,LLDP, SRTP
Security	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access log 802.1X Authentication(EAP-TLS, EAP-LEAP) Device certificate(Hanwha Techwin Root CA)
Edge Storage	Micro SD/SDHC/SDXC 2slot 1TB
Application Programming Interface	ONVIF Profile S/G/T SUNAPI(HTTP API) Wisenet open platform
Webpage Language	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek
Web Viewer	Supported OS: Windows 7, 8.1, 10, Mac OS X 10.10, 10.11, 10.12 Recommended Browser: Google Chrome Supported Browser: MS Explore11, MS Edge, Mozilla Firefox(Window 64bit only), Apple Safari(Mac OS X only)
Memory	4GB RAM, 512MB Flash
Environmental	
Operating Temperature / Humidity	-40°C~+50°C (-40°F ~ +122°F) / Less than 95% RH(Non-condensing) Start up should be done at above -30°C Maximum Temperature : +55°C(+131°F), intermittent Absolute maximum(According to NEMA TS2, 2.2.7) : +74°C
Storage Temperature / Humidity	-50°C~+60°C (-58°F~+140°F) / Less than 95% RH(Non-condensing)
Certification	IP66, IK10(Body only), NEMA4X, NEMA TS 2.2.8, NEMA TS 2.2.9
Electrical	
Input Voltage	PoE+(IEEE802.3at, Class4, Type 2)
Power Consumption	HPoE Max. 25W, Typ. 20W
Mechanical	
Color / Material	White / body(Aluminum),dome(PC)
RAL Code	None
Product dimensions / weight	Ø158x293mm, 3.1Kg
Conduit hole	None
Hanging mount(Dome)	None
Skin cover(Dome)	None
Weather cap(Dome)	None
Power module	None
Backbox	None

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☒ 230 Vac ☐ 100 Vac ☐ 24 Vac ☐ 12 Vdc ☐ PoE

Frequency ☒ 50 Hz ☐ 60 Hz ☐ Hz

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	XNP-6400	-	HANWHA VISION VIETNAM COMPANY LIMITED	EUT
PoE Adapter 1	PT-PSE109GBRO- AH-S	-	Dongguan PROCET Network Technology Co.,Ltd	EUT

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
PoE Adapter 2	GS728TPP V1H1	-	-	-
Notebook 1	P95G001	8KM8HT2	Wistron Infocom (Chengdu) Company Limited	-
Notebook 1 Adapter	LA65NS2-01	-	LITE-ON TECHNOLOGY (CHANGZHOU)CO.,LTD.	-
Notebook 2	LG15N54	410NZXE015458	LG Electronics	-
Notebook 2 Adapter	ADP-90WH B	84ZW19F1747	DELTA ELECTRONICS (JIANGSU) LTD.	-
Micro SD Card	-	-	-	16 GB



1.6 External I/O Cabling

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (EUT)	RJ-45	PoE Adapter 1 (EUT)	RJ-45	2.5	S
	Slot	Micro SD Card	Slot	-	-
PoE Adapter 1 (EUT)	Optical	PoE Adapter 2	Optical	5.0	U
	RJ-45	Notebook 1	RJ-45	4.0	S
PoE Adapter 2	RJ-45	Notebook 2	RJ-45	2.0	U

* Unshielded=U, Shielded=S


1.7 EUT Operating Mode(s)

Test Mode	operating
Operation mode	EUT Monitoring, Ping Test

EUT Test operating S/W		
Name	Version	Manufacture Company
Web Viewer	-	Hanwha Vision Co., Ltd

1.8 Configuration

■ AC Main
 □ DC Main

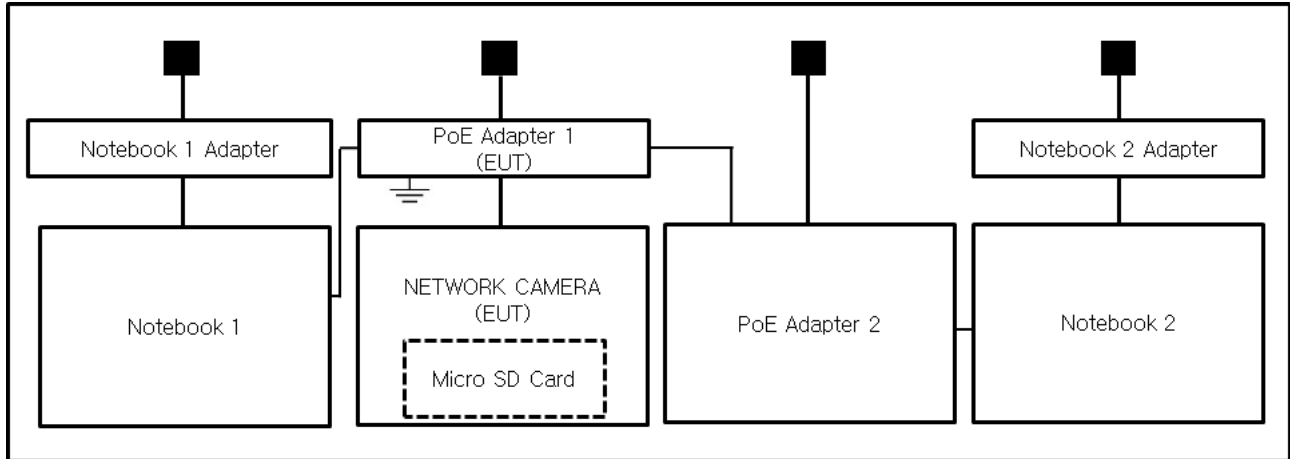

1.9 Remarks when standards applied

N/A







1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.11 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004



2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **EMC – Directive 2014/30/EU**

☒ EN 55032:2015/A11:2020

☒ Class A

☐ Class B

☒ EN 50130-4:2011

☒ EN 61000-3-2:2014

☒ EN 61000-3-3:2013

☒ **EMC – Regulations 2016**

☒ EN 55032:2015/A11:2020

☒ Class A

☐ Class B

☒ EN 50130-4:2011

☒ EN 61000-3-2:2014

☒ EN 61000-3-3:2013



2.1 Conducted Emissions at Mains Power Ports

Test Date

Nov. 13, 2020

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EMC32	R & S	9.12.00	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESR3	R & S	101783	01, 20, 2021
<input checked="" type="checkbox"/>	LISN	ENV216	R & S	101787	01, 02, 2021
<input checked="" type="checkbox"/>	LISN	ESH2-Z5	R & S	100450	01, 02, 2021
<input checked="" type="checkbox"/>	PULSE LIMITER	ESH3-Z2	R & S	101915	01, 02, 2021

Test Conditions

Temperature: 23,4 °C
Relative Humidity: 46,8 % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

2.2 Conducted Emissions at Telecommunication Ports

Test Date

Nov. 13, 2020

Test Location

Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EMC32	R & S	9.12.00	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESR3	R & S	101783	01, 20, 2021
<input checked="" type="checkbox"/>	LISN	ENV216	R & S	101787	01, 02, 2021
<input checked="" type="checkbox"/>	LISN	ESH2-Z5	R & S	100450	01, 02, 2021
<input checked="" type="checkbox"/>	PULSE LIMITER	ESH3-Z2	R & S	101915	01, 02, 2021
<input type="checkbox"/>	8-WIRE ISN CAT3,5	ENY81	R & S	100174	01, 07, 2021
<input type="checkbox"/>	8-WIRE ISN CAT6	ENY81-CAT6	R & S	101665	01, 07, 2021
<input checked="" type="checkbox"/>	ISN	ISN S8	SCHWARZBECK	ISN-S8-0019	03, 10, 2021

Test Conditions

Temperature: 23,4 °C
Relative Humidity: 46,8 % R.H.

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Nov. 13, 2020

Test Location

☐ OPEN AREA TEST SITE #2 ☒ SEMI ANECHOIC CHAMBER #4(10m)

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESU26	R & S	100551	04, 01, 2021
<input checked="" type="checkbox"/>	AMPLIFIER	SCU 01	R & S	100603	11, 25, 2021
<input checked="" type="checkbox"/>	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	11, 29, 2020
<input checked="" type="checkbox"/>	ATTENUATOR	8491A	HP	32173	03, 10, 2021

Test Conditions

Temperature: 23,3 °C
Relative Humidity: 47,1 % R.H.

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Nov. 16, 2020

Test Location

SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESR7	R & S	101190	08, 05, 2021
<input checked="" type="checkbox"/>	PREAMPLIFIER	8449B	AGILENT	3008A01967	04, 20, 2021
<input type="checkbox"/>	ATTENUATOR	8491A	HP	35496	03, 10, 2021
<input checked="" type="checkbox"/>	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	03, 11, 2021

Test Conditions

Temperature: 22,4 °C
Relative Humidity: 45,7 % R.H.

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.5 Harmonic Current Emissions

Test Date

Nov. 17, 2020

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	net.control	EM TEST	2.1.4	-
<input checked="" type="checkbox"/>	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	04, 06, 2021
<input checked="" type="checkbox"/>	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions

Temperature: 22,8 °C
Relative Humidity: 47,4 % R.H.

Classification of Equipment for Harmonic Current Emissions

- ☒ Class A
☐ Class B
☐ Class C(Below 25 W)
☐ Class C(Above 25 W)
☐ Class D

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.6 Voltage Fluctuations and Flicker

Test Date

Nov. 17, 2020

Test Location

Electro wave Shieldroom #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	net.control	EM TEST	2.1.4	-
<input checked="" type="checkbox"/>	DIGITAL POWER ANALYZER	DPA 500N	EM TEST	V1024106759	04, 06, 2021
<input checked="" type="checkbox"/>	POWER SOURCE	ACS 500N6	EM TEST	V1024106760	-

Test Conditions

Temperature: 22,8 °C
Relative Humidity: 47,4 % R.H.

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.

3.0 Criteria for compliance

Criteria for compliance was based on the following guidelines:

EN 50130-4:2011 Alarm systems-Part 4: Electromagnetic compatibility Product family
standard: Immunity requirements for components of fire, intruder and social alarm systems

The variety and the diversity of the apparatus within the scope of this document makes it difficult to define precise criteria for the evaluation of the immunity test results.

If as a result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe then the apparatus shall be deemed to have failed the test.

A functional description and a definition of performance by the manufacture and noted in the test report, based on the following criteria:

Electrostatic discharge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing that is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

Radiated electromagnetic fields

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing which could be interpreted by associated equipment as a change, and no such

Flickering of indicators occurs at a field strength of 3 V/m.

For components of CCTV systems, where the picture is allowed at 10 V/m, providing.

(a) there is no permanent damage or change to EUT

(e.g. no corruption of memory or changes to programmable setting etc.)

(b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used; and

(c) there is no observable deterioration of the picture at 1 V/m.

Fast transient burst / slow high energy voltage surge

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing
That there is no residual is permissible, providing that there is no residual change in the EUT or
any
change in outputs, which could be interpreted by associated equipment as a change.

Conducted RF immunity

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing
That there is no residual is permissible, providing that there is no residual change in the EUT or
any
change in outputs, which could be interpreted by associated equipment as a change,
and no such flickering of indicators oeuvres at $U = 130 \text{ dB}\mu\text{V}$.
For component of CCTV systems, where the status is monitored by observing the TV picture,
then deterioration of the picture is allowed at $U = 140 \text{ dB}\mu\text{V}$, providing:
(a) there is no permanent damage or change to the EUT
(e.g. no corruption of memory or changes to programmable settings etc.)
(b) at $U = 130 \text{ dB}\mu\text{V}$, any deterioration of the picture is so minor that the system could
still be used; and
(c) there in no observable deterioration of the picture at $U = 120 \text{ dB}\mu\text{V}$.

Voltage dip/interruption / Voltage variation

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the conditioning is permissible, providing that there is no
residual
change in the EUT or any change in outputs, which could be interpreted by associated
equipment
as a change. The EUT shall meet the acceptance criteria for the functional test, after the
conditioning.



3.1 Electrostatic Discharge

Reference Standard

EN 61000-4-2:2009

Test Date

Nov. 18, 2020

Test Location

EMS-ESD: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	ESD SIMULATOR	ESS-2000	Noise Ken	ESS05X4620	01, 28, 2021
<input checked="" type="checkbox"/>	HCP	-	KES	-	-
<input checked="" type="checkbox"/>	VCP	-	Noise Ken	-	-

Test Conditions

Temperature: 22,7 °C
Relative Humidity: 46,7 % R.H.
Atmospheric Pressure: 100,7 kPa

Test Specifications

Discharge Factor: ≥ 1 s

Discharge Impedance: 330 ohm / 150 pF

Kind of Discharge: Air, Contact (direct and indirect)

Polarity: Positive and Negative

Number of Discharge: 10 at all locations for Air discharge
10 at all locations for Contact discharge

Discharge Voltage:	Contact	Air	HCP	VCP
	<input type="checkbox"/> 2 kV	<input checked="" type="checkbox"/> 2 kV	<input type="checkbox"/> 2 kV	<input type="checkbox"/> 2 kV
	<input type="checkbox"/> 4 kV	<input checked="" type="checkbox"/> 4 kV	<input type="checkbox"/> 4 kV	<input type="checkbox"/> 4 kV
	<input checked="" type="checkbox"/> 6 kV	<input type="checkbox"/> 6 kV	<input checked="" type="checkbox"/> 6 kV	<input checked="" type="checkbox"/> 6 kV
	<input type="checkbox"/> 8 kV	<input checked="" type="checkbox"/> 8 kV	<input type="checkbox"/> 8 kV	<input type="checkbox"/> 8 kV
	<input type="checkbox"/> 15 kV	<input type="checkbox"/> 15 kV	<input type="checkbox"/> 15 kV	<input type="checkbox"/> 15 kV

Notes: HCP: Horizontal coupling plane
VCP: Vertical coupling plane


Required Performance Criteria: ☒ Complied

Location of Discharge:


Air
Contact



1

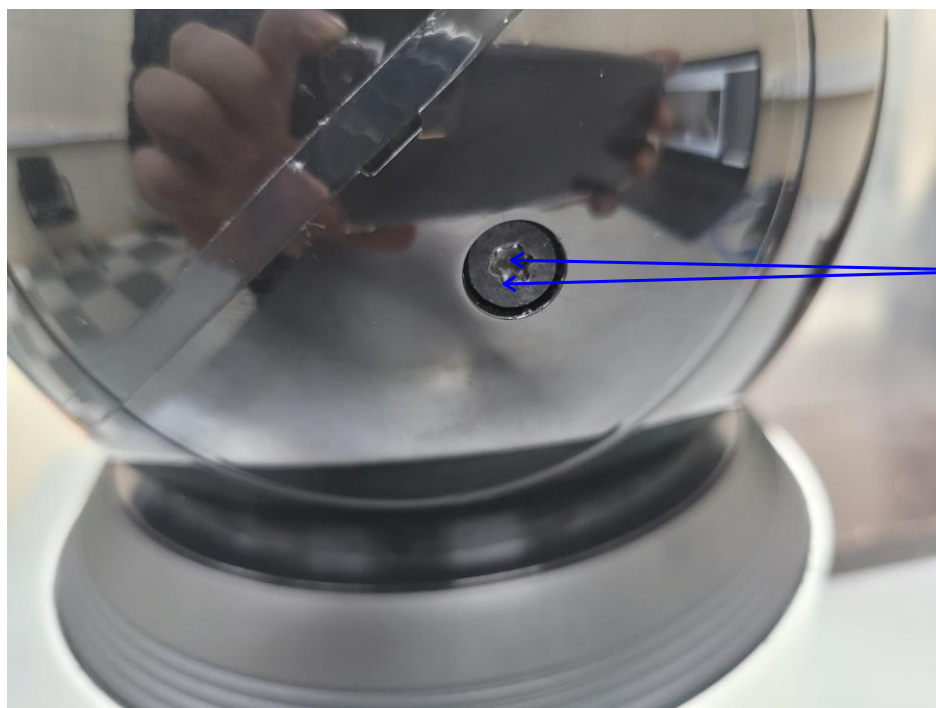

2

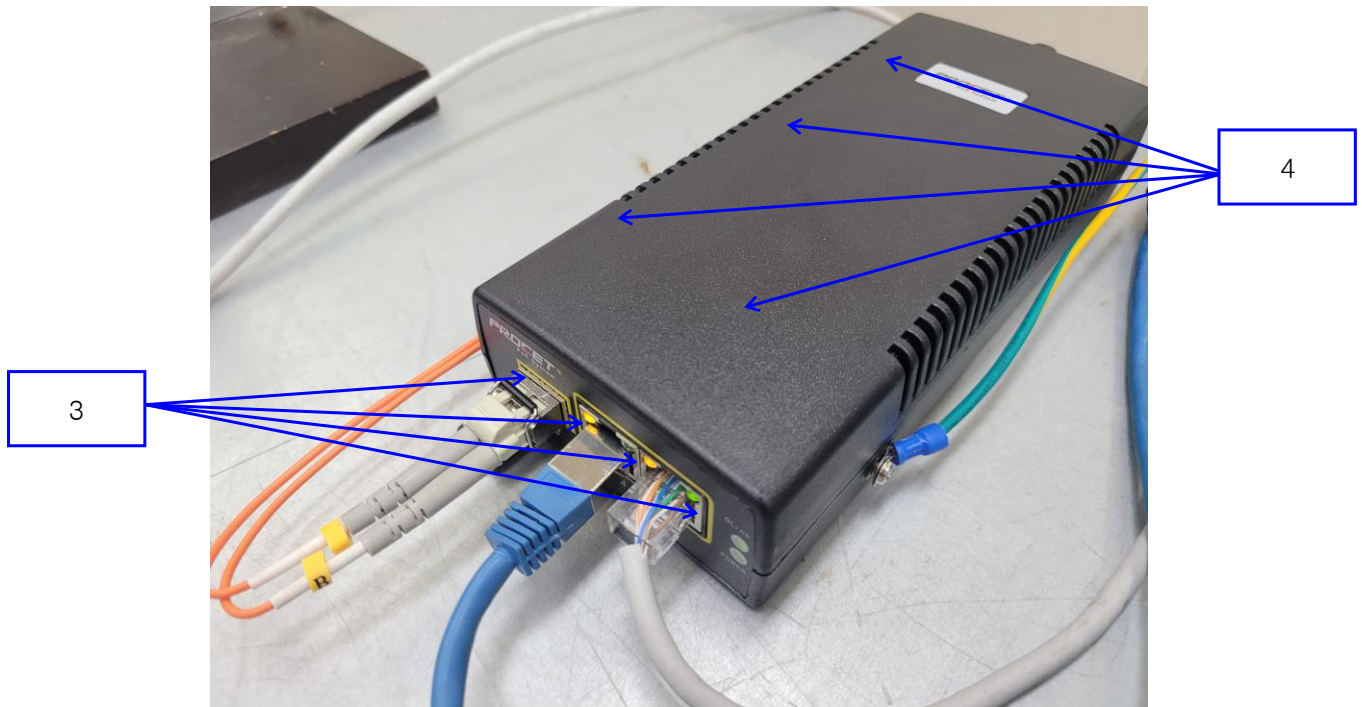

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-20T0857-R2

Page (22) of (65)

Test Data

Indirect Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Observations	Remarks
1	Enclosure	Air Discharge	Complied	-
2	Screw	Contact Discharge	Complied	-
3	Port	Contact Discharge	Complied	-
4	PoE Adapter	Contact Discharge	Complied	-

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

RemarksPASS Required Performance Criteria



3.2 Radiated Electric Field Immunity

Reference Standard

EN 61000-4-3:2006 +A2:2010

Test Date

Nov. 16, 2020

Test Location

EMS-RS: ☐ SEMI ANECHOIC CHAMBER #2 ☒ SEMI ANECHOIC CHAMBER #3

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMS Test S/W	EMC32	R & S	9.12.00	-
<input checked="" type="checkbox"/>	SIGNAL GENERATOR	SMB 100A	Rohde & Schwarz	108252	08, 05, 2021
<input checked="" type="checkbox"/>	HIGH POWER DUAL AMP	SSA532	SUNGSAN	SSA532-001	-
<input checked="" type="checkbox"/>	POWER METER	E4419B	Agilent	GB40203000	04, 20, 2021
<input checked="" type="checkbox"/>	CW POWER SENSOR	E4412A	Agilent	US38488240	04, 20, 2021
<input checked="" type="checkbox"/>	CW POWER SENSOR	E4412A	Agilent	MY41501662	04, 20, 2021
<input checked="" type="checkbox"/>	STACKED DOUBLE LOG-PER- ANTENNA	STPL9128 E	Schwarzbeck	9128ES-121	-
<input checked="" type="checkbox"/>	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	03, 11, 2021

Test Conditions

Temperature: 22,4 °C
Relative Humidity: 45,7 % R.H.
Atmospheric Pressure: 101,0 kPa



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-20T0857-R2

Page (24) of (65)

Test Specifications

Antenna Polarization: Horizontal & vertical unless indicated otherwise

Antenna Distance: ☒ 3 m

Field Strength: ☐ 1 V/m ☐ 3 V/m
☒ 10 V/m

Frequency Range: ☐ 80 MHz to 1 GHz ☐ 1,4 GHz to 2,7 GHz
☒ 80 MHz to 2,7 GHz

Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☐ 1 s ☒ 3 s

of Sides Radiated: ☒ 4

Required Performance Criteria: ☒ Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-20T0857-R2

Page (25) of (65)

Test Data

Side Exposed	Observations	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

RemarksPASS Required Performance Criteria

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

3.3 Electrical Fast Transients/Bursts

Reference Standard

EN 61000-4-4:2012

Test Date

Nov. 18, 2020

Test Location

EMS-EFT: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMS Test S/W	iec.control	EM TEST	5.4.7	-
<input checked="" type="checkbox"/>	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 27, 2020
<input checked="" type="checkbox"/>	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 27, 2020
<input checked="" type="checkbox"/>	CAPACITIVE COUPLING CLAMP	HFK	EM TEST	P1633183115	11, 27, 2020

Test Conditions

Temperature: 22,7 °C
Relative Humidity: 46,7 % R.H.
Atmospheric Pressure: 100,7 kPa

Test Specifications

Pulse Amplitude & Polarity: (AC Power Lines)	<input type="checkbox"/> ± 1.0 kV <input type="checkbox"/> ± 4.0 kV	<input checked="" type="checkbox"/> ± 2.0 kV
Pulse Amplitude & Polarity: (Other supply / Signal Lines)	<input type="checkbox"/> ± 0.5 kV <input type="checkbox"/> ± 2.0 kV	<input checked="" type="checkbox"/> ± 1.0 kV
Burst Period:	<input checked="" type="checkbox"/> 300 ms	<input type="checkbox"/> 2 s
Repetition Rate:	<input type="checkbox"/> 5 kHz	<input checked="" type="checkbox"/> 100 kHz
Duration of Test Voltage:	<input checked="" type="checkbox"/> ≥ 1 min	
Required Performance Criteria:	<input checked="" type="checkbox"/> Complied	

Test Data

☒ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
L	Complied	Complied
N	Complied	Complied
PE	Complied	Complied
L – N	Complied	Complied
L – PE	Complied	Complied
N – PE	Complied	Complied
L – N – PE	Complied	Complied

☐ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	Observations	
	(+) Burst (kV)	(-) Burst (kV)
RJ-45	Complied	Complied

Note: “Blank” = Not performed

Observations:

Complied – No degradation of function

Test Results

☒ PASS Required Performance Criteria

☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria



3.4 Surge Transients

Reference Standard

EN 61000-4-5:2014

Test Date

Nov. 18, 2020

Test Location

EMS-EFT: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMS Test S/W	iec.control	EM TEST	5.4.7	-
<input checked="" type="checkbox"/>	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 27, 2020
<input checked="" type="checkbox"/>	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 27, 2020
<input checked="" type="checkbox"/>	CDN	CNV 508N1	EM TEST	P1610176296	11, 27, 2020

Test Conditions

Temperature: 22,7 °C
Relative Humidity: 46,7 % R.H.
Atmospheric Pressure: 100,7 kPa



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-20T0857-R2

Page (29) of (65)

Test Specifications

AC Power Lines

Source Impedance: 12 ohm for common Mode and 2 ohm for differential Mode

Surge Amplitude :

Common Mode

☒ (0,5 / 1,0 / 2,0) kV

Differential Mode

☒ (0,5 / 1,0) kV

Number of Surges:

☒ 5 surges per angle

Angle:

☒ 0°, 90°, 180°, 270° (input a.c. power port)

Polarity:

☒ Positive & Negative

Repetition Rate:

☐ 1 surge per min ☒ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied

Other supply / Signal Lines

Source Impedance:

42 ohm for common Mode

Surge Amplitude:

Common Mode

☒ (0,5 / 1,0) kV

Number of Surges:

☒ 5 Surges

Polarity:

☒ Positive & Negative

Repetition Rate:

☐ 1 surge per min ☒ 1 surge per 30 sec.

Required Performance Criteria: ☒ Complied

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-20T0857-R2

Page (30) of (65)

Test Data☒ Line to Line – Differential Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – N	Complied	Complied

☒ Line to Earth – Common Mode

Mode of Application	Observations	
	(+) Surge (kV)	(-) Surge (kV)
L – PE	Complied	Complied
N – PE	Complied	Complied

Signal Lines☒ Line to Earth – Common Mode

Mode of Application	Coupling Method	Observations	
		(+) Surge (kV)	(-) Surge (kV)
RJ-45	CDN	Complied	Complied
	LINE	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria
☐ NOT APPLICABLE

RemarksPASS Required Performance Criteria

3.5 Conducted Disturbance

Reference Standard

EN 61000-4-6:2014

Test Date

Nov. 17, 2020

Test Location

EMS-CS: Electro wave Shieldroom #6

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMS Test S/W	icd.control	EM TEST	5.3.11	-
<input checked="" type="checkbox"/>	CONTINUOUS WAVE SIMULATOR	CWS 500N1.4	EM TEST	P1602169880	07, 22, 2021
<input checked="" type="checkbox"/>	ATTENUATOR	ATT 6/80	EM TEST	P1614178148	11, 25, 2021
<input checked="" type="checkbox"/>	CDN	CDN M016	TESEQ	43694	11, 25, 2021
<input checked="" type="checkbox"/>	CDN	CDN M016	TESEQ	43697	11, 25, 2021
<input checked="" type="checkbox"/>	CDN	CDN ST08A	TESEQ	43886	11, 25, 2021

Test Conditions

Temperature: 23,0 °C
Relative Humidity: 45,6 % R.H.
Atmospheric Pressure: 101,1 kPa

Test Specifications

Frequency range: ☒ 150 kHz to 100 MHz ☐ 150 kHz to 80 MHz

Voltage Level: ☐ 1 Vrms ☐ 3 Vrms
☒ 10 Vrms

Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % step

Dwell Time: ☐ 1 s ☒ 3 s

Required Performance Criteria: ☒ Complied

Test Data

☒ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
L – N – PE	CDN	Complied

☐ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observations
-	-	-

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observations
RJ-45	CDN	Complied

Notes: CDN = Coupling Decoupling Network
"blank" = Not performed

Observations:
Complied – No degradation of function

Test Results

☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria



3.6 Voltage Dips and Short Interruptions

Reference Standard

EN 61000-4-11:2004

Test Date

Nov. 18, 2020

Test Location

EMS-Voltage dip: Electro wave Shieldroom #7

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMS Test S/W	iec.control	EM TEST	5.4.7	-
<input checked="" type="checkbox"/>	ULTRA COMPACT SIMULATOR	UCS 500N7	EM TEST	P1608172950	11, 27, 2020
<input checked="" type="checkbox"/>	MOTOR VARIAC	MV2616	EM TEST	P1552169719	11, 27, 2020

Test Conditions

Temperature: 22,7 °C
Relative Humidity: 46,7 % R.H.
Atmospheric Pressure: 100,7 kPa

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-20T0857-R2

Page (34) of (65)

Test Specifications & Observations/Remarks**- Voltage Dips and Short Interruptions**

<u>Test Level</u>	<u>Duration [in period/ms (50 Hz)]</u>	<u>Results</u>
<input checked="" type="checkbox"/> 20 % dip	<input checked="" type="checkbox"/> 250 / 5 000	<u>Complied</u>
<input checked="" type="checkbox"/> 30 % dip	<input checked="" type="checkbox"/> 25 / 500	<u>Complied</u>
<input checked="" type="checkbox"/> 60 % dip	<input checked="" type="checkbox"/> 10 / 200	<u>Complied</u>
<input checked="" type="checkbox"/> 100 % dip	<input checked="" type="checkbox"/> 250 / 5 000	<u>Degradation</u>

- Voltage variations

<input checked="" type="checkbox"/> Unom + 10 %	<input checked="" type="checkbox"/> 253.0 V (ac)	<u>Complied</u>
<input checked="" type="checkbox"/> Unom - 15 %	<input checked="" type="checkbox"/> 195.5 V (ac)	<u>Complied</u>

Observations:

Complied – No degradation of function

Degradation - See "Remarks "

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria
☐ NOT APPLICABLE

Remarks

During the test(100%, 250cycle), EUT was turned off but after the test, it was recovered by no operator's intervention.


APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

[HOT]

Common Information

Test Description:	Conducted Emission
Model No.:	XNP-6400
Phase:	
Mode:	H
Operator Name:	KES

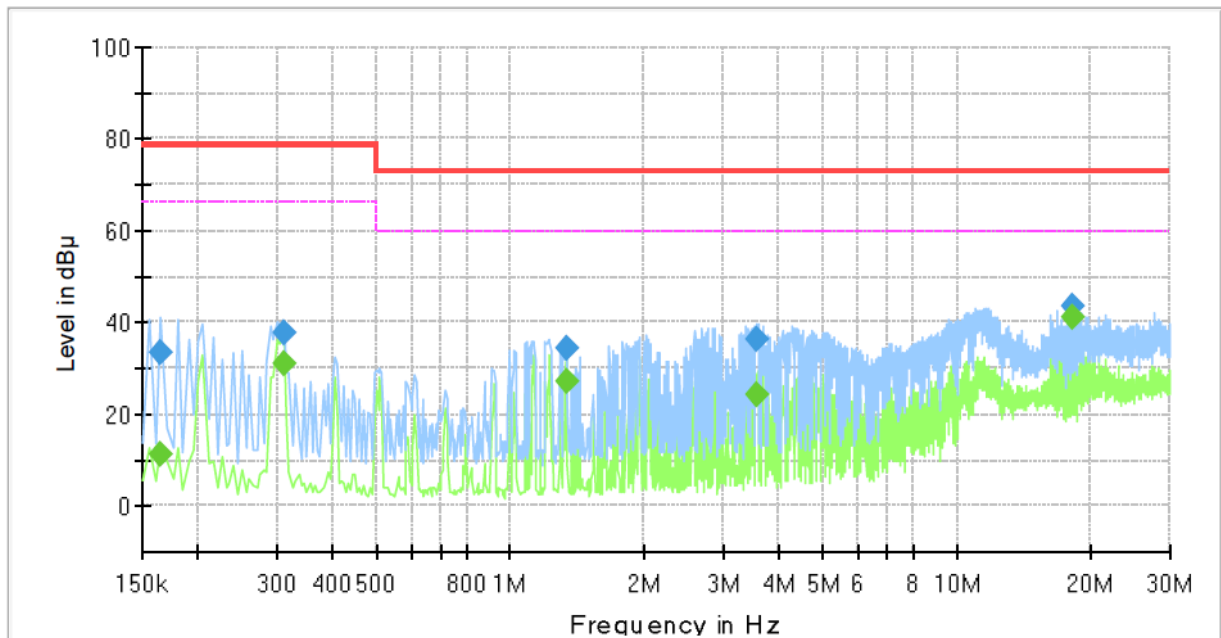

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.165000	---	11.19	66.00	54.81	1000.0	9.000	L1	19.5
0.165000	33.38	---	79.00	45.62	1000.0	9.000	L1	19.5
0.310000	---	30.90	66.00	35.10	1000.0	9.000	L1	19.6
0.310000	37.83	---	79.00	41.17	1000.0	9.000	L1	19.6
1.330000	---	27.07	60.00	32.93	1000.0	9.000	L1	20.1
1.330000	34.22	---	73.00	38.78	1000.0	9.000	L1	20.1
3.560000	---	24.48	60.00	35.52	1000.0	9.000	L1	19.9
3.560000	36.52	---	73.00	36.48	1000.0	9.000	L1	19.9
18.245000	---	41.08	60.00	18.92	1000.0	9.000	L1	20.2
18.245000	43.65	---	73.00	29.35	1000.0	9.000	L1	20.2

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.


The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr

[NEUTRAL]

Common Information

Test Description:	Conducted Emission
Model No.:	XNP-6400
Phase:	
Mode:	N
Operator Name:	KES

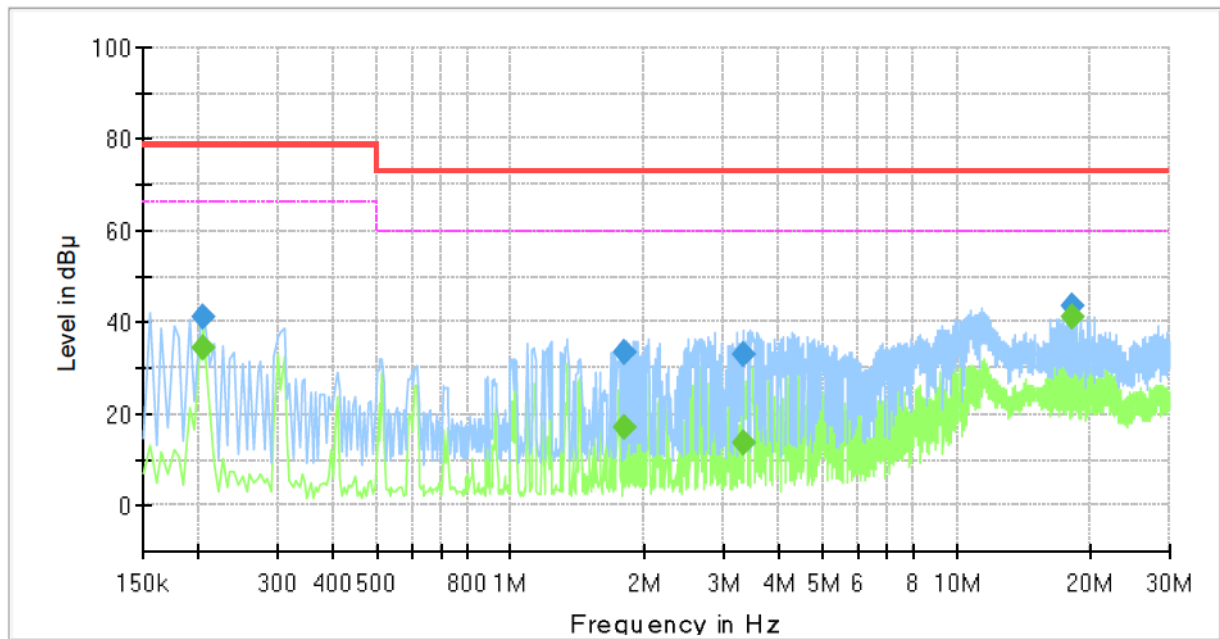

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.205000	---	34.40	66.00	31.60	1000.0	9.000	N	19.5
0.205000	41.28	---	79.00	37.72	1000.0	9.000	N	19.5
1.795000	---	17.15	60.00	42.85	1000.0	9.000	N	20.2
1.795000	33.25	---	73.00	39.75	1000.0	9.000	N	20.2
3.335000	---	13.66	60.00	46.34	1000.0	9.000	N	20.0
3.335000	32.76	---	73.00	40.24	1000.0	9.000	N	20.0
18.245000	---	41.29	60.00	18.71	1000.0	9.000	N	20.2
18.245000	43.79	---	73.00	29.21	1000.0	9.000	N	20.2

◆ Calculation

QuasiPeak[dBuV] / CAverage [dBuV] = Reading Value[dBuV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.


Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))

Conducted Emissions at Telecommunication Ports

[100 Mbps]

Common Information

Test Description: Telecommunication Emission
 Model No.: XNP-6400
 Mode : 100 Mbps
 Speed :
 Operator Name: KES

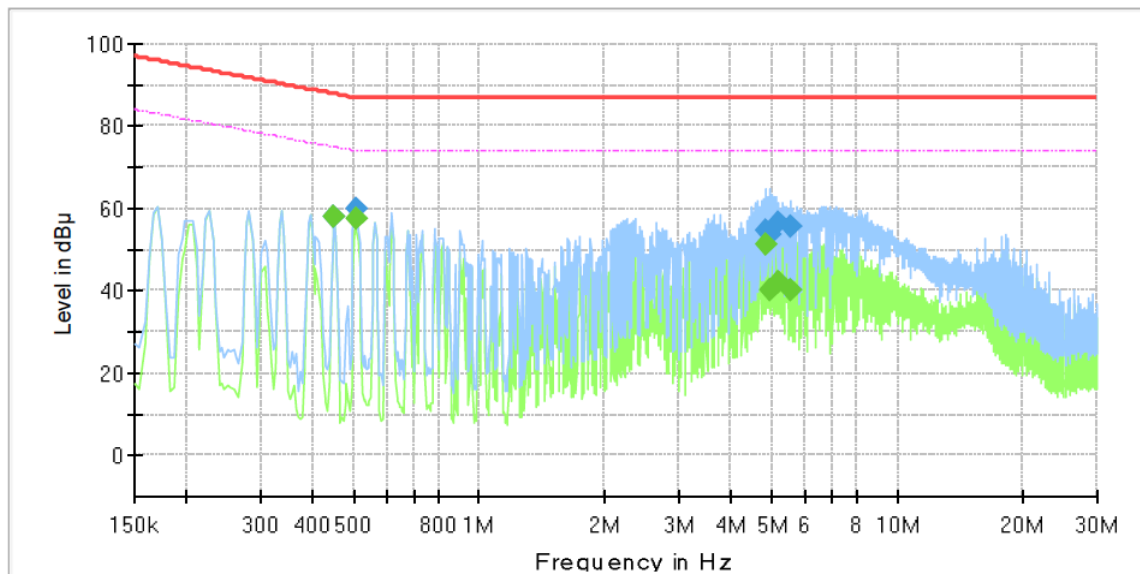

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.450000	---	58.06	74.88	16.82	1000.0	9.000	Single Line	19.7
0.450000	58.02	---	87.88	29.86	1000.0	9.000	Single Line	19.7
0.506000	---	57.39	74.00	16.61	1000.0	9.000	Single Line	19.7
0.506000	59.82	---	87.00	27.18	1000.0	9.000	Single Line	19.7
4.834000	---	51.07	74.00	22.93	1000.0	9.000	Single Line	19.5
4.834000	54.74	---	87.00	32.26	1000.0	9.000	Single Line	19.5
4.950000	---	39.99	74.00	34.01	1000.0	9.000	Single Line	19.4
4.950000	53.76	---	87.00	33.24	1000.0	9.000	Single Line	19.4
5.174000	---	42.23	74.00	31.77	1000.0	9.000	Single Line	19.4
5.174000	56.63	---	87.00	30.37	1000.0	9.000	Single Line	19.4
5.566000	---	40.27	74.00	33.73	1000.0	9.000	Single Line	19.4
5.566000	55.82	---	87.00	31.18	1000.0	9.000	Single Line	19.4

◆ Calculation

QuasiPeak [dBμV] / CAverage [dBμV] = Reading Value [dBμV] + Corr. [dB]

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (ISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-20T0857-R2

Page (38) of (65)

Radiated Electric Field Emissions(Below 1 GHz)

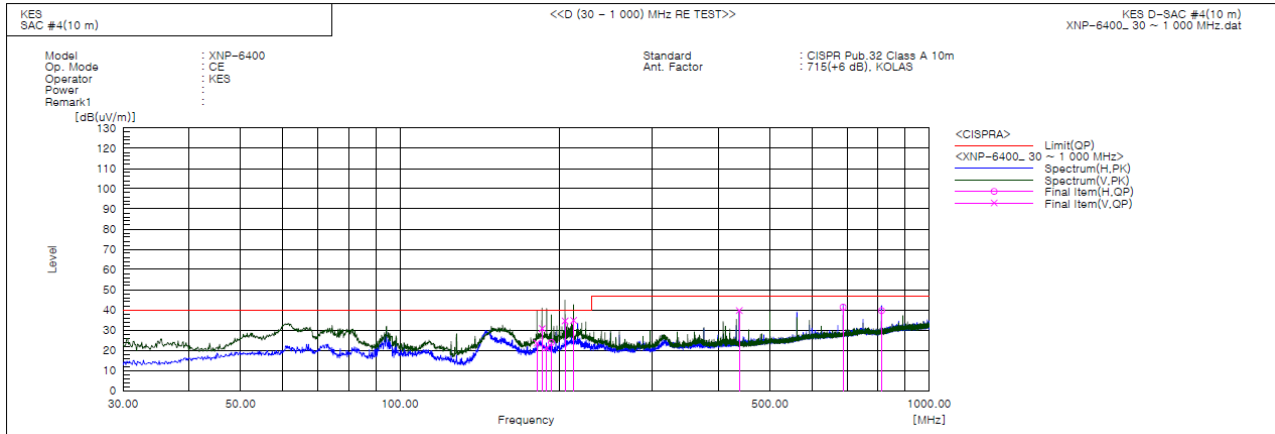

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	181.563	V	47.2	-23.7	23.5	40.0	16.5	103.0	25.0	
2	185.564	V	54.1	-23.3	30.8	40.0	9.2	124.0	21.0	
3	189.323	V	44.0	-22.9	21.1	40.0	18.9	120.0	21.0	
4	193.324	H	46.3	-22.5	23.8	40.0	16.2	385.0	131.0	
5	205.085	V	56.0	-21.4	34.6	40.0	5.4	150.0	310.0	
6	212.845	V	55.8	-21.0	34.8	40.0	5.2	154.0	335.0	
7	437.521	V	54.6	-14.9	39.7	47.0	7.3	115.0	343.0	
8	687.660	H	50.1	-8.7	41.4	47.0	5.6	120.0	61.0	
9	812.669	H	47.3	-7.7	39.6	47.0	7.4	364.0	168.0	

◆ Calculation – SEMI ANECHOIC CHAMBER #4(10 m)

Result(QP) [dB(μV/m)] = (Reading(QP)[dB(μV)] + c.f[dB(1/m)])

Margin(QP)[dB] = Limit[dB(μV/m)] - Result(QP) [dB(μV/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr



KES Co., Ltd.


3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-20T0857-R2

Page (39) of (65)

Radiated Electric Field Emissions(Above 1 GHz)

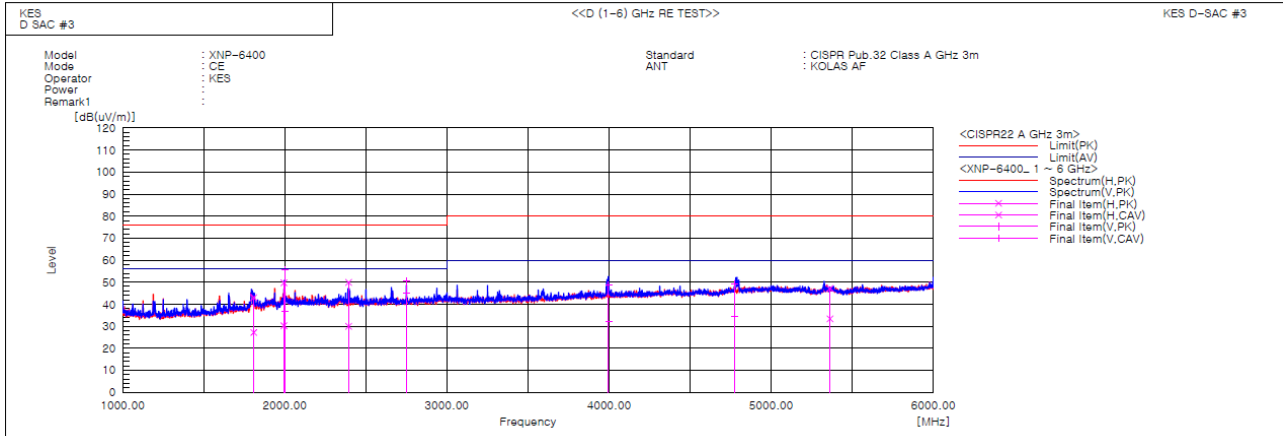

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1808.478	H	46.7	30.8	-3.7	43.0	27.1	76.0	56.0	33.0	28.9	100.0	143.0	
2	1994.220	H	52.1	32.5	-2.3	49.8	30.2	76.0	56.0	26.2	25.8	100.0	123.6	
3	1999.829	V	57.8	39.0	-2.3	55.5	36.7	76.0	56.0	20.5	19.3	100.0	1.3	
4	2393.280	H	50.6	30.6	-0.7	49.9	29.9	76.0	56.0	26.1	26.1	100.0	173.8	
5	2750.290	V	50.0	44.3	0.6	50.6	44.9	76.0	56.0	25.4	11.1	100.0	17.5	
6	3997.000	V	44.2	27.5	4.6	48.8	32.1	80.0	60.0	31.2	27.9	100.0	155.8	
7	4776.153	V	41.8	27.1	7.4	49.2	34.5	80.0	60.0	30.8	25.5	100.0	191.1	
8	5361.947	H	39.3	25.4	7.9	47.2	33.3	80.0	60.0	32.8	26.7	100.0	252.9	

◆ Calculation

Result(PK/CAV) [dB(μV/m)] = (Reading(PK/CAV)[dB(μV)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(μV/m)] - Result(PK/CAV) [dB(μV/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr



Harmonic Current Emissions and Voltage Fluctuations and Flicker

Average harmonic current results

Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	0.090			
2	0.003	0.268	1.080	n/a
3	0.081	3.501	2.300	PASS
4	0.004	1.012	0.430	n/a
5	0.078	6.844	1.140	PASS
6	0.003	1.076	0.300	n/a
7	0.075	9.762	0.770	PASS
8	0.003	1.287	0.230	n/a
9	0.070	17.619	0.400	PASS
10	0.004	1.924	0.184	n/a
11	0.066	19.891	0.330	PASS
12	0.003	1.813	0.153	n/a
13	0.061	28.963	0.210	PASS
14	0.002	1.771	0.131	n/a
15	0.055	36.809	0.150	PASS
16	0.002	1.791	0.115	n/a
17	0.049	36.983	0.132	PASS
18	0.002	1.857	0.102	n/a
19	0.042	35.712	0.118	PASS
20	0.002	1.756	0.092	n/a
21	0.036	22.279	0.161	PASS
22	0.001	1.546	0.084	n/a
23	0.030	20.304	0.147	PASS
24	0.001	1.396	0.077	n/a
25	0.024	17.808	0.135	PASS
26	0.001	1.366	0.071	n/a
27	0.019	14.841	0.125	PASS
28	0.001	1.885	0.066	n/a
29	0.013	11.498	0.116	PASS
30	0.001	1.929	0.061	n/a
31	0.009	8.277	0.109	PASS
32	0.001	1.951	0.058	n/a
33	0.005	5.291	0.102	PASS
34	0.001	2.163	0.054	n/a
35	0.003	2.671	0.096	n/a
36	0.001	1.934	0.051	n/a
37	0.002	2.462	0.091	n/a
38	0.001	1.997	0.048	n/a
39	0.003	3.835	0.087	n/a
40	0.001	1.811	0.046	n/a

Note: Harmonic currents less than 0.6 % of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

* Application of limits for average is 100% except for odd harmonics from 21 to 39, where 150% applies.



Test Data - Harmonics (continued)

Maximum harmonic current results				
Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	0.090			
2	0.003	0.202	1.620	n/a
3	0.081	2.337	3.450	PASS
4	0.005	0.772	0.645	n/a
5	0.078	4.571	1.710	PASS
6	0.004	0.796	0.450	n/a
7	0.075	6.518	1.155	PASS
8	0.003	0.971	0.345	n/a
9	0.071	11.817	0.600	PASS
10	0.004	1.444	0.276	n/a
11	0.066	13.423	0.495	PASS
12	0.003	1.377	0.230	n/a
13	0.061	19.358	0.315	PASS
14	0.003	1.375	0.197	n/a
15	0.055	24.657	0.225	PASS
16	0.002	1.415	0.173	n/a
17	0.049	24.736	0.199	PASS
18	0.002	1.495	0.153	n/a
19	0.042	23.898	0.178	PASS
20	0.002	1.387	0.138	n/a
21	0.036	22.402	0.161	PASS
22	0.002	1.243	0.125	n/a
23	0.030	20.427	0.147	PASS
24	0.001	1.142	0.115	n/a
25	0.024	17.954	0.135	PASS
26	0.001	1.147	0.106	n/a
27	0.019	15.021	0.125	PASS
28	0.001	1.429	0.099	n/a
29	0.014	11.645	0.116	PASS
30	0.001	1.469	0.092	n/a
31	0.009	8.439	0.109	PASS
32	0.001	1.500	0.086	n/a
33	0.006	5.477	0.102	PASS
34	0.001	1.660	0.081	n/a
35	0.003	2.797	0.096	n/a
36	0.001	1.484	0.077	n/a
37	0.002	2.686	0.091	n/a
38	0.001	1.478	0.073	n/a
39	0.003	4.002	0.087	n/a
40	0.001	1.346	0.069	n/a

Note: Harmonic currents less than 0.6 % of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

* Application of limits for average is 100% except for odd harmonics from 21 to 39, where 150% applies.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:

KES-EM-20T0857-R2

Page (42) of (65)

Test Data - Voltage Fluctuations

Maximum Flicker results

Flicker Measurements					
	Plt	Max Pst	Max Dc	Max Dmax	Max Tmax
Line 1:	0.028	0.028	0	< 0.2	0
Limits:	0.65	1	3.3	4	0.5
Results:	PASS	PASS	PASS	PASS	PASS

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


Test Setup Photos and Configuration

Conducted Emissions at Mains Power Ports





This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Conducted Emissions at Telecommunication Ports

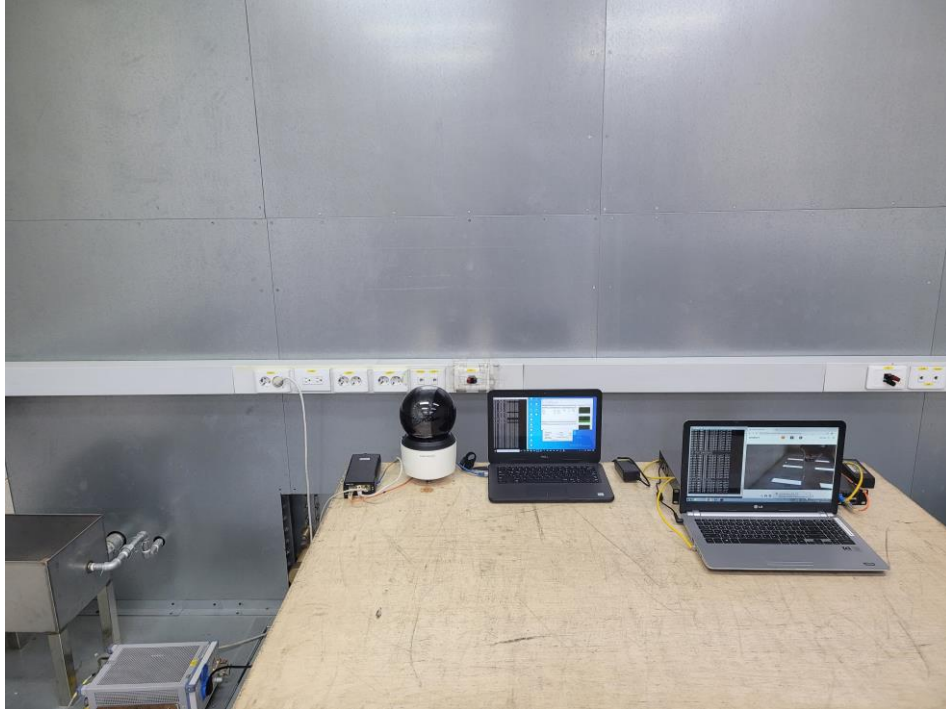


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Below 1 GHz)

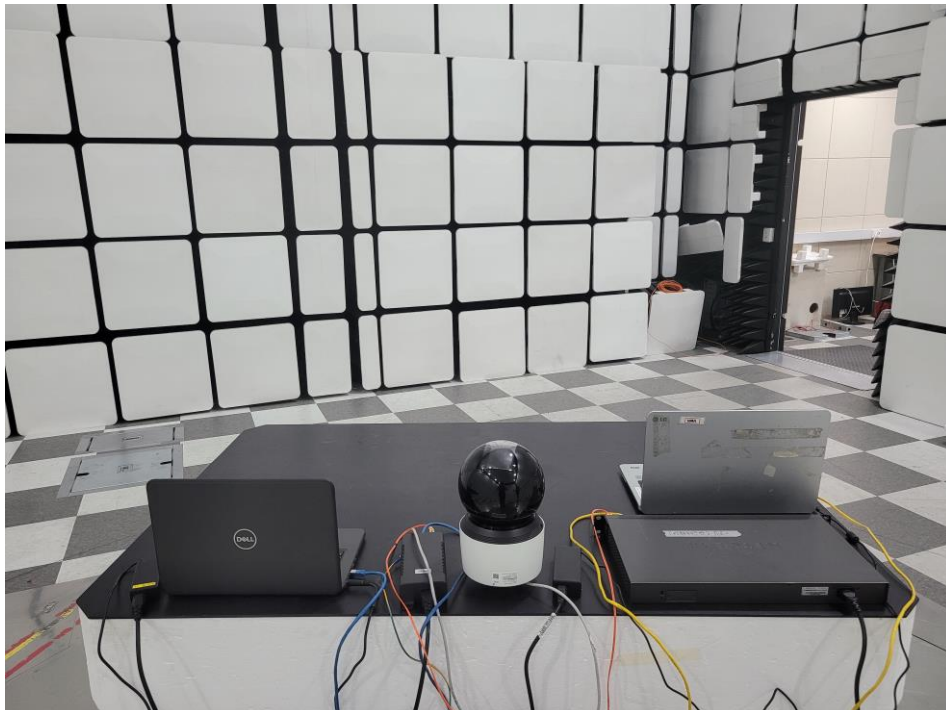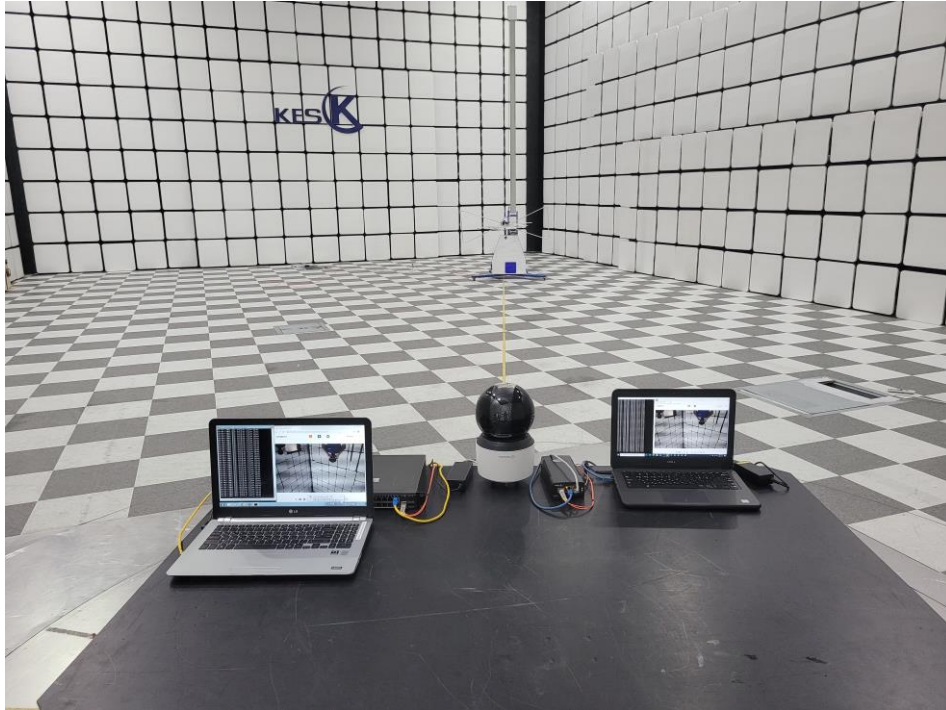

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Radiated Electric Field Emissions(Above 1 GHz)

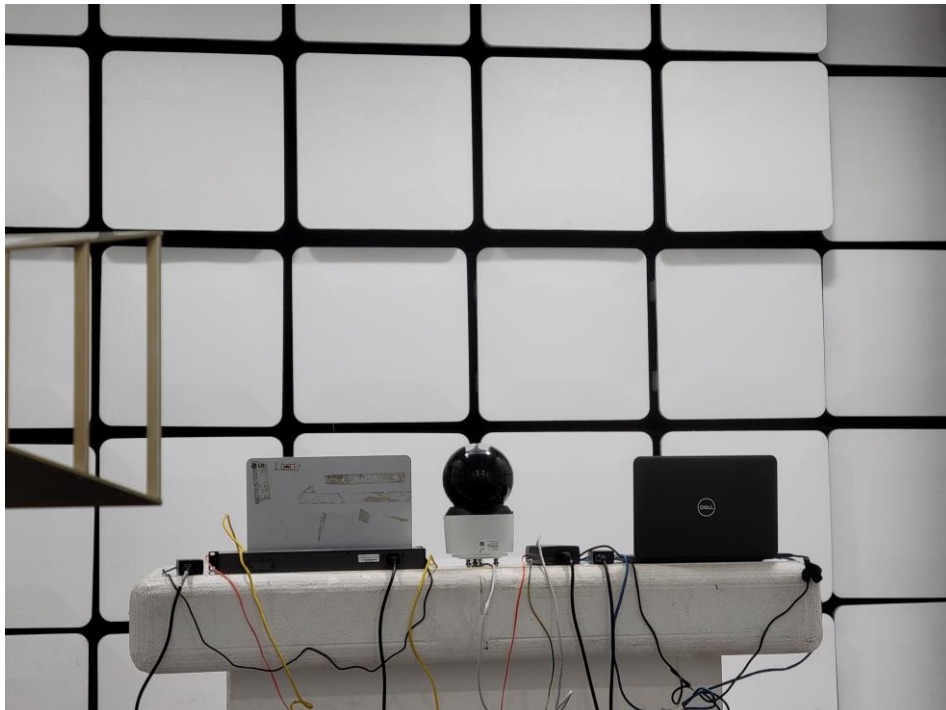

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


Harmonic Current Emissions and Voltage Fluctuations and Flicker



Electrostatic Discharge



Radiated Electric Field Immunity

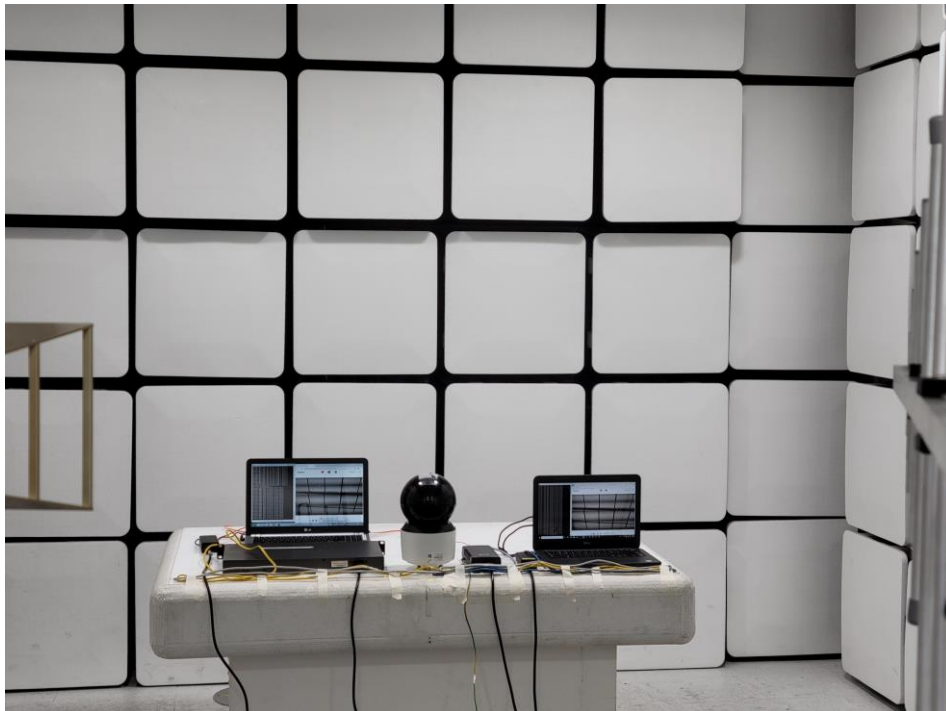

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Electrical Fast Transients/Bursts



Surge Transients



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Conducted Disturbance



Voltage Dips and Short Interruptions



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr


EUT Internal Photographs

(Internal View)




EUT Internal View – Main Board

(Top)

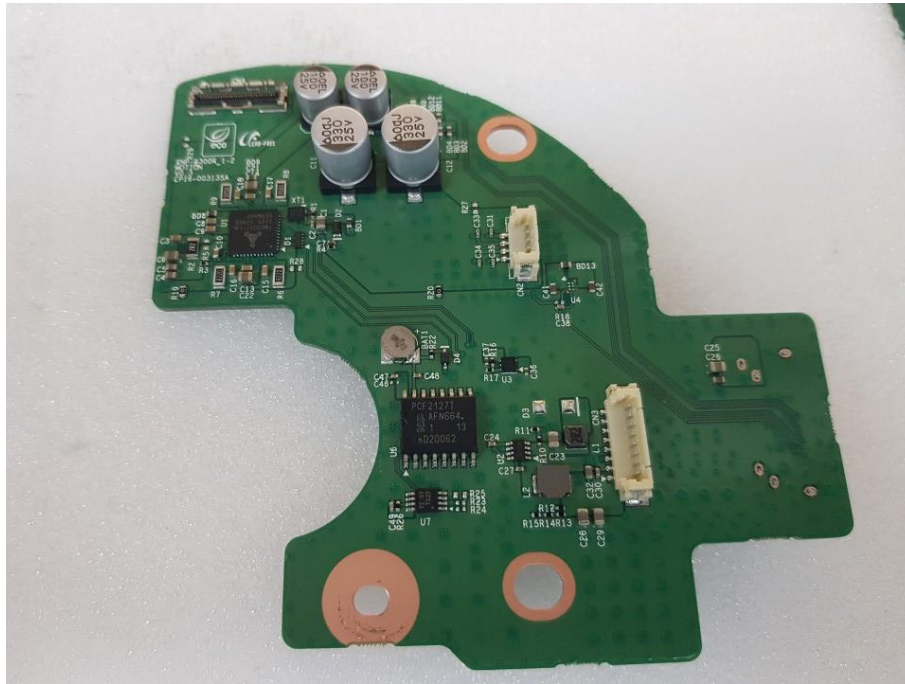

(Bottom)

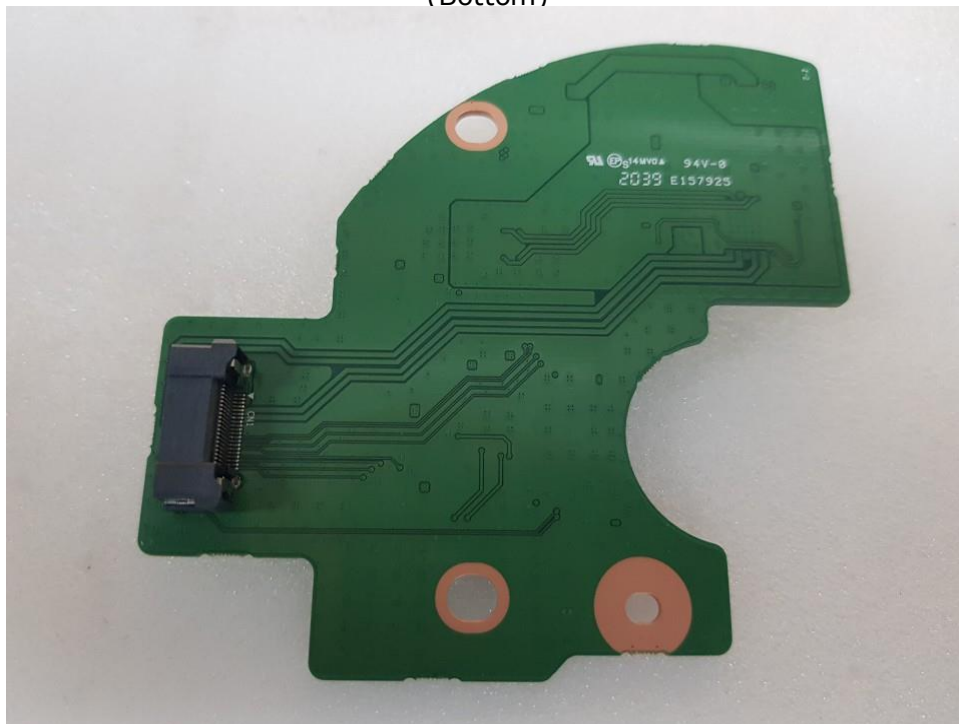

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Sub Board 1

(Top)




(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Sub Board 3

(Top)

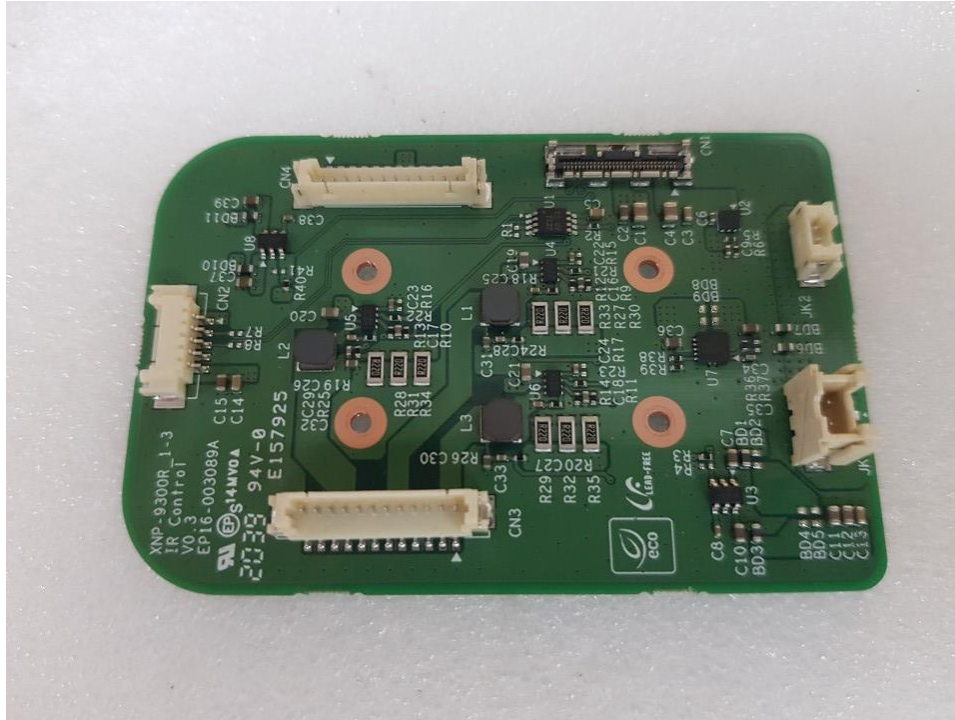


(Bottom)

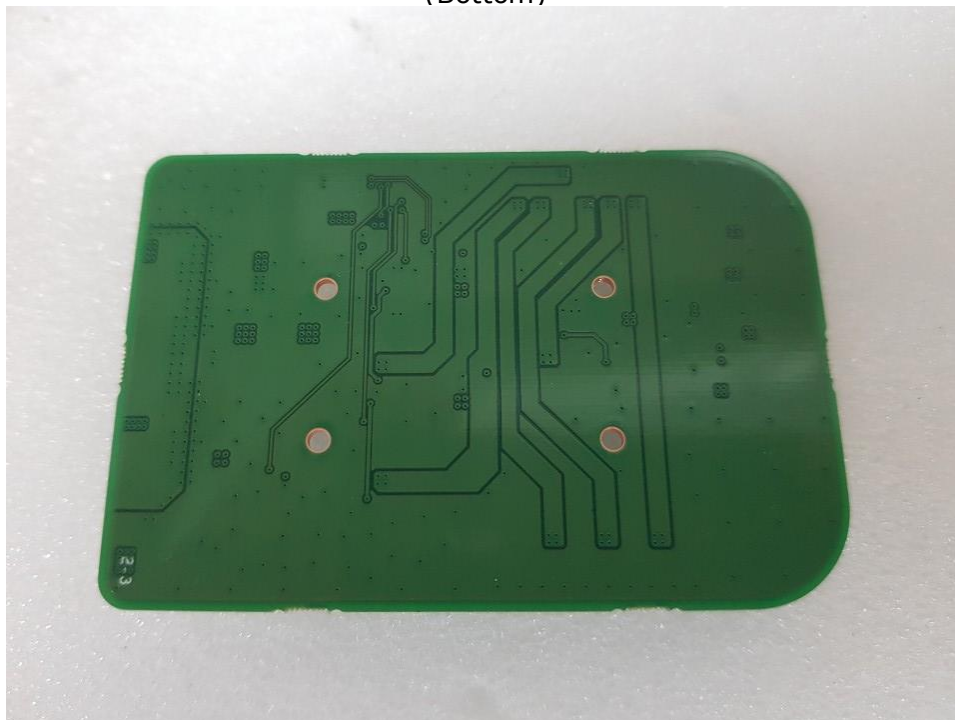

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Sub Board 4

(Top)

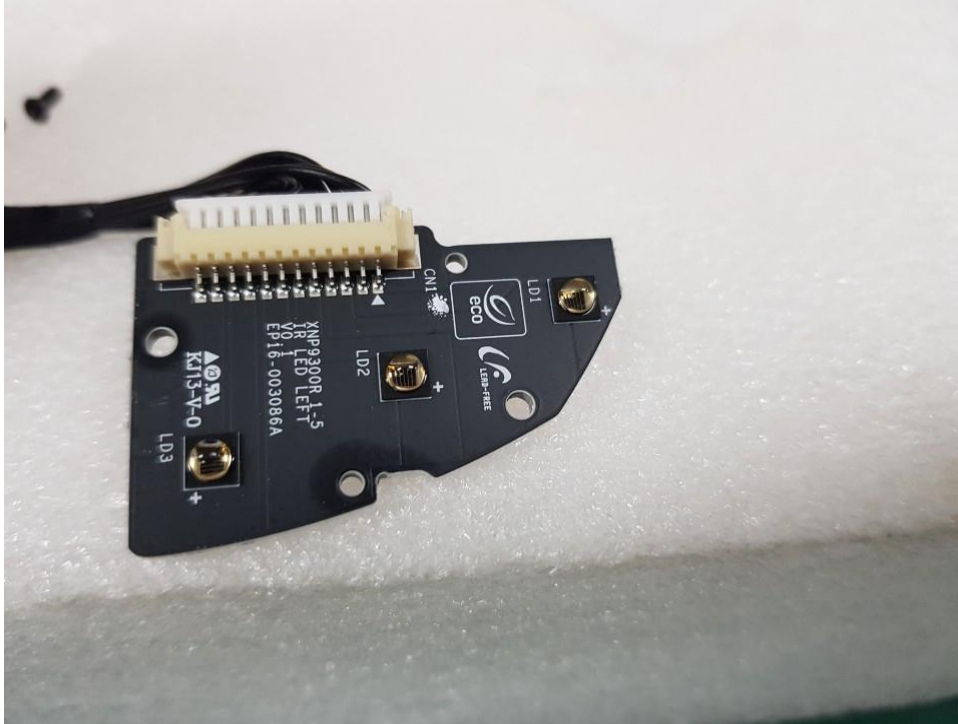


(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Sub Board 5

(Top)

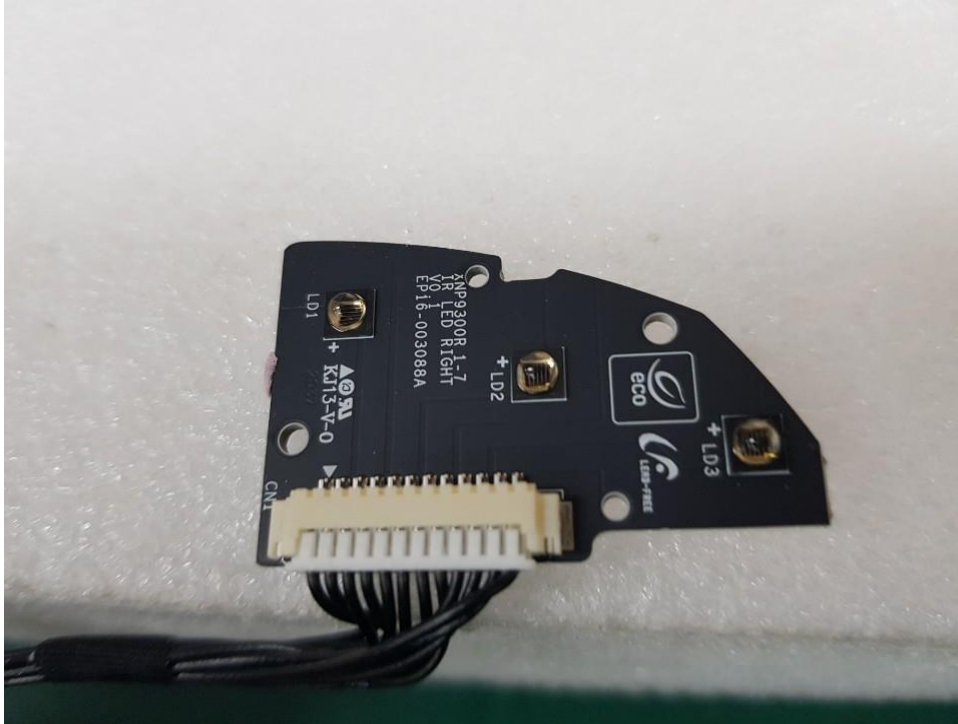

(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Sub Board 6

(Top)




(Bottom)

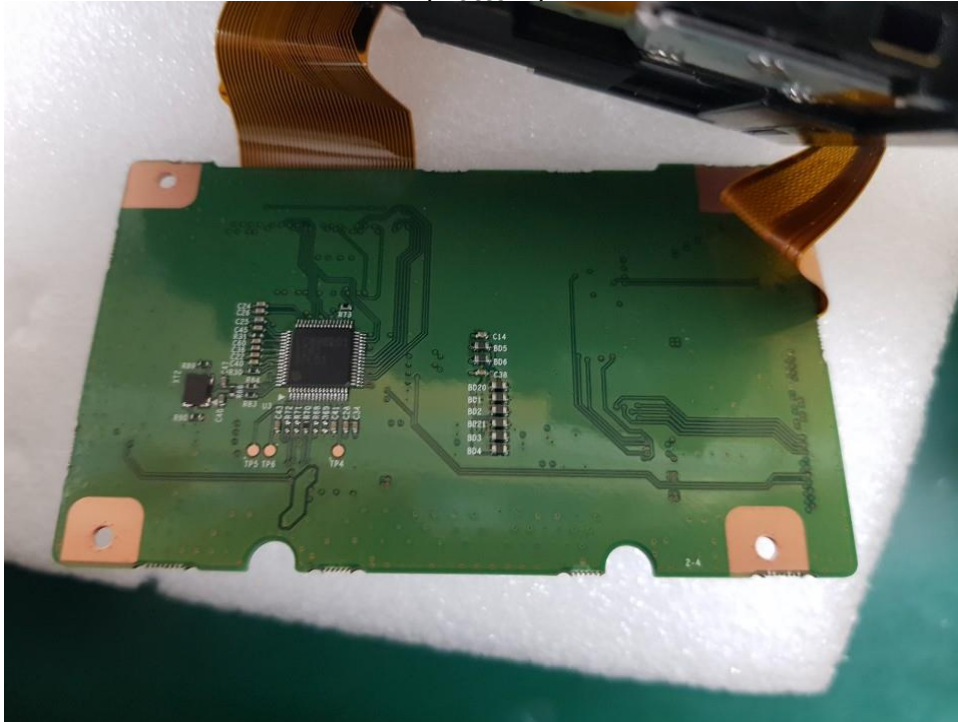


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Sub Board 7

(Top)

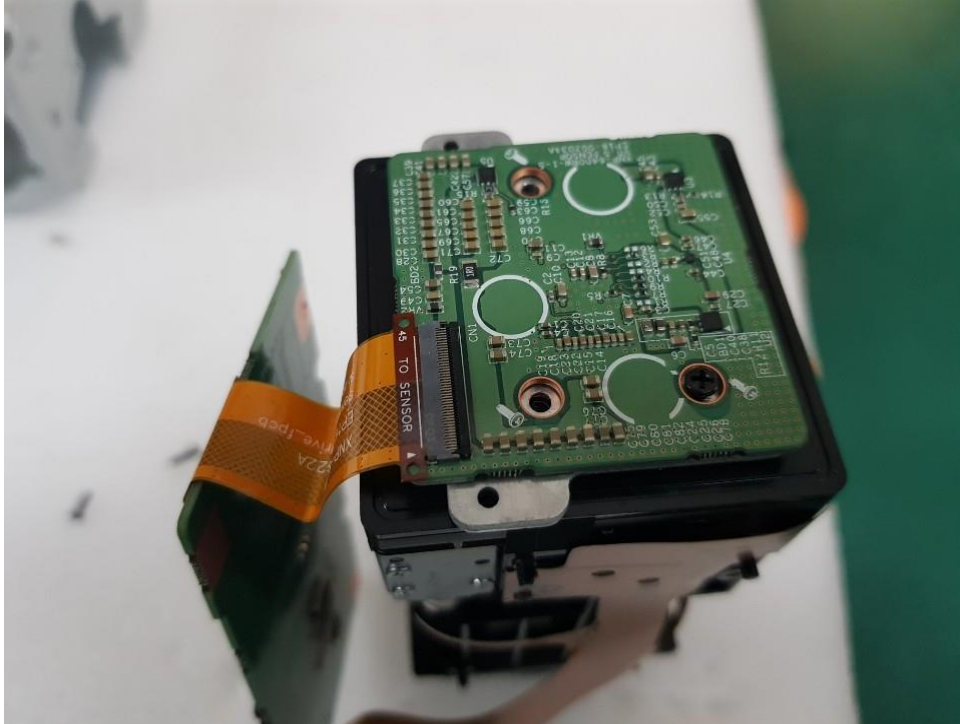


(Bottom)

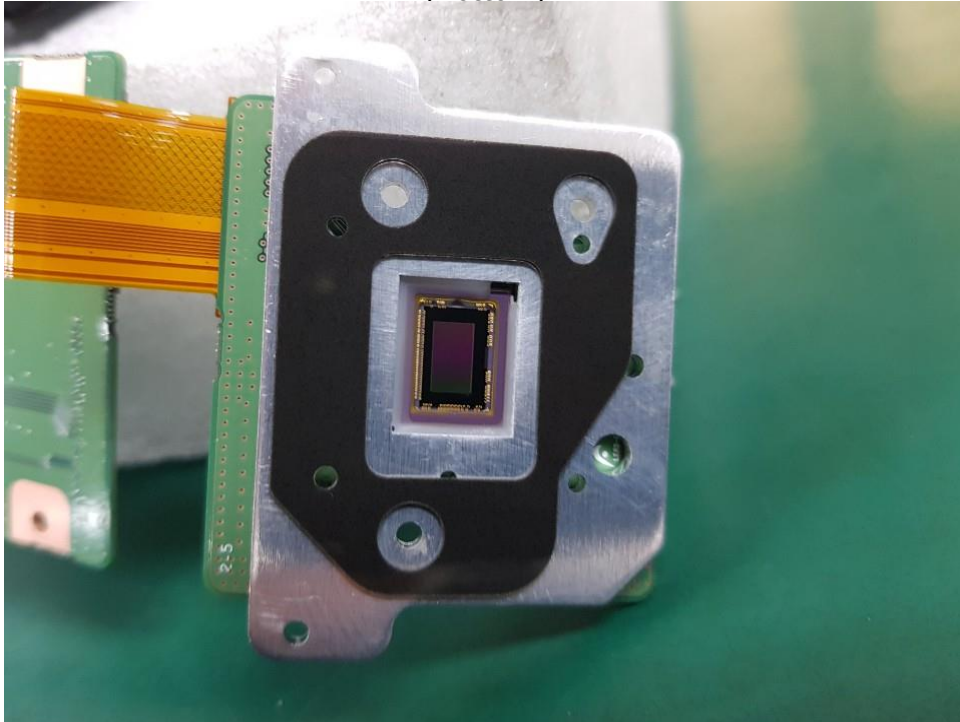


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – Sub Board 8

(Top)

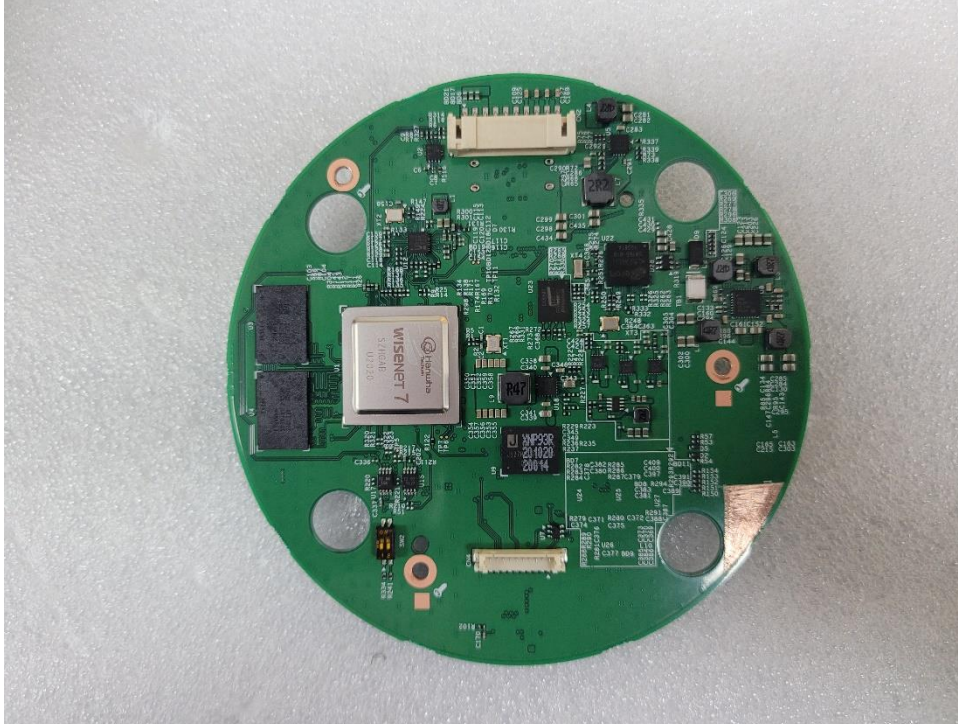


(Bottom)

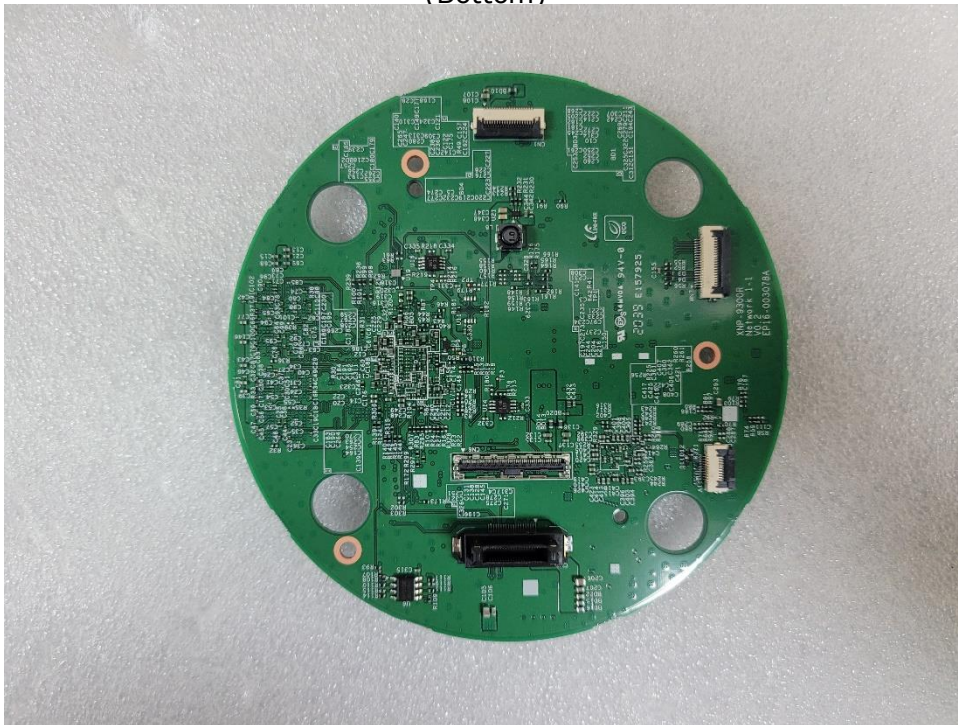


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – CAMERA LENS Board

(Top)

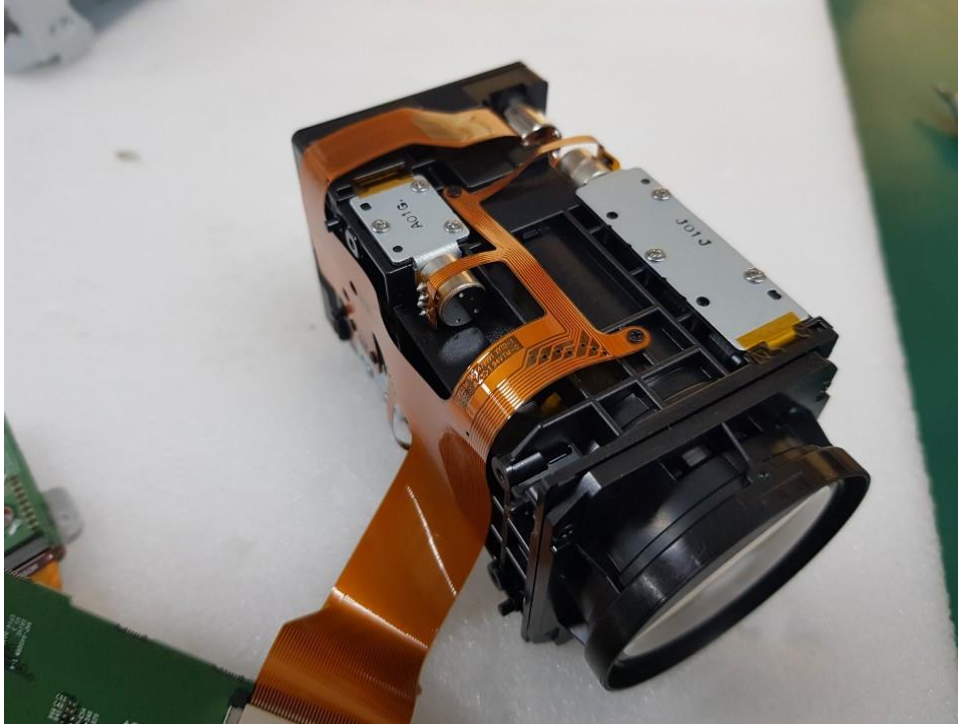

(Bottom)

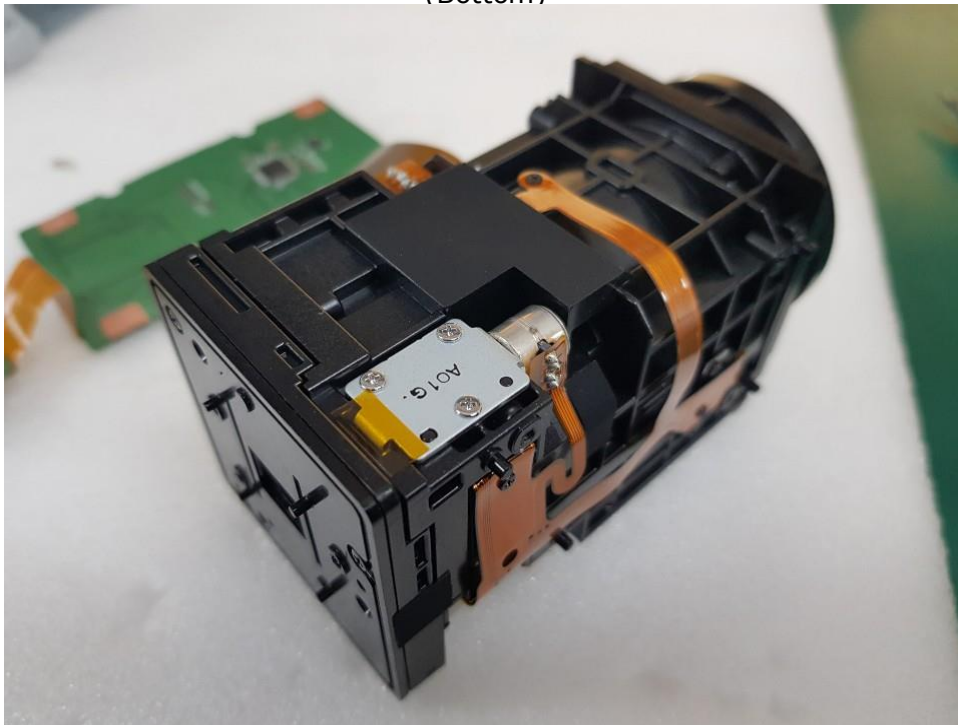

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

EUT Internal View – PoE Adapter

(Top)




(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact kes@kes.co.kr

Label and Location

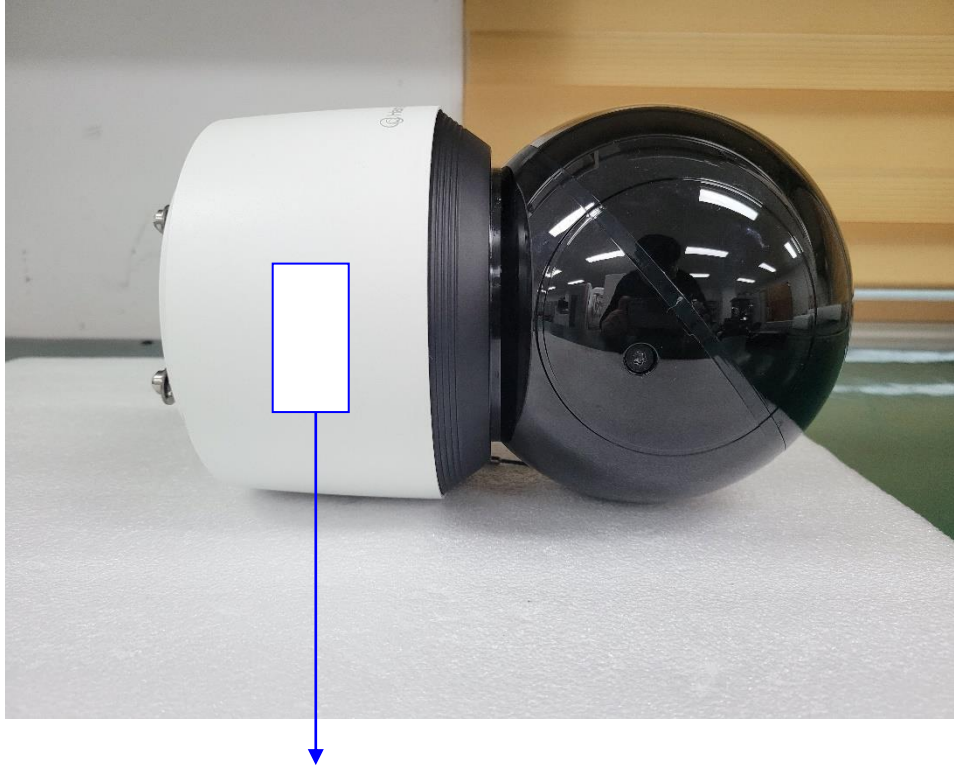

NETWORK CAMERA

Model No : XNP-6400

Manufacturer : HANWHA VISION VIETNAM COMPANY LIMITED

Made in Vietnam

