

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-EM-20T0860-R2

Page (1) of (35)

# EMC TEST REPORT

Test Report No. : KES-EM-20T0860-R2  
Date of Issue : Feb. 24, 2023  
Product name : NETWORK CAMERA  
Model/Type No. : XNP-6400  
Variant Model : -  
Applicant : Hanwha Vision Co., Ltd  
Applicant Address : 6, Pangyo-ro 319Beon-gil, Bundang-gu, Seongnam-si,  
Gyeonggi-do, Republic of Korea  
Manufacturer : 1. HANWHA VISION VIETNAM COMPANY LIMITED  
2. D-TECH CO.,LTD.  
Manufacturer Address : 1. Lot O-2, Que Vo Industrial Zone extended area,  
Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam  
2. 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi- do,  
Korea (Suwon Industrial Complex)  
Equipment authorization : **Supplier's Declaration of Conformity**  
Date of Receipt : Nov. 04, 2020  
Test date : Nov. 13, 2020  
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

*Tested by*

Dong Hyun, Won  
EMC Test Engineer

*Reviewed by*

Dong-Hun, Jang  
EMC Technical Manager

This test report is not related to KS Q ISO/IEC 17025 and KOLAS.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-EM-20T0860-R2

Page (2) of (35)

**REPORT REVISION HISTORY**

Date	Test Report No.	Revision History
Nov. 27, 2020	KES-EM-20T0860	Issued
Jan. 15, 2021	KES-EM-20T0860-R1	Reissue due to specification change
Feb. 24, 2023	KES-EM-20T0860-R2	Change the Applicant and Manufacturer at the request of the customer

***This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.***

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr



## TABLE OF CONTENTS

1.0	General Product Description.....	4
1.1	Test Voltage & Frequency .....	6
1.2	Variant Model Differences .....	6
1.3	Device Modifications .....	6
1.4	Equipment Under Test.....	6
1.5	Support Equipments .....	6
1.6	External I/O Cabling .....	7
1.7	EUT Operating Mode(s) .....	7
1.8	Configuration.....	8
1.9	Remarks when standards applied .....	9
1.10	Calibration Details of Equipment Used for Measurement .....	9
1.11	Test Facility .....	9
1.12	Laboratory Accreditations and Listings .....	9
2.0	Test Regulations.....	10
2.1	Conducted Emissions at Mains Power Ports .....	12
2.2	Radiated Electric Field Emissions(Below 1 GHz) .....	13
2.3	Radiated Electric Field Emissions(Above 1 GHz) .....	14
APPENDIX A – TEST DATA.....		15
Conducted Emissions at Mains Power Ports.....		15
Radiated Electric Field Emissions(Below 1 GHz) .....		17
Radiated Electric Field Emissions(Above 1 GHz) .....		18
Test Setup Photos and Configuration .....		19
Conducted Emissions at Mains Power Ports.....		19
Radiated Electric Field Emissions(Below 1 GHz) .....		20
Radiated Electric Field Emissions(Above 1 GHz) .....		21
EUT External Photographs .....		22
EUT Internal Photographs .....		23



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-EM-20T0860-R2

Page (4) of (35)

## 1.0 General Product Description

### Main Specifications of EUT are:

<b>Video</b>	
Imaging Device	1/2.8" 2MP CMOS
Effective Pixels	1944(H)x1212(V)
Min. Illumination	Color: 0.05Lux(F1.6, 1/30sec) BW: 0.005Lux(F1.6, 1/30sec)
Video Out	None
<b>Lens</b>	
Focal Length (Zoom Ratio)	4.25~170mm(40x) zoom
Max. Aperture Ratio	F1.6(Wide)~F4.95(Tele)
Angular Field of View	H: 65.66°(Wide)~1.88°(Tele) / V: 39.40°(Wide)~1.09°(Tele)
Min. Object Distance	5m(16.4ft)
Focus Control	Oneshot AF, Focus save
Lens Type	DC auto iris
<b>Pan / Tilt / Rotate</b>	
Pan Range	360° Endless
Pan Speed	Max. 700°/sec, Manual: 0.024°/sec~250°/sec
Tilt Range	110°(-20°~90°)
Tilt Speed	Max. 500°/sec, Manual: 0.024°/sec~250°/sec
Sequence	Preset(300ea), Swing, Group(6ea), Trace, Tour, Auto Run, Schedule, Preset trace recording
Preset Accuracy	±0.1°(±20°C by temperature at preset setting) / ±0.2°(other temperature)
Azimuth	Support
Auto Tracking	Object auto tracking(Person/Vehicle)
<b>Operational</b>	
IR Viewable Length	None
Camera Title	Displayed up to 85 characters, Direction Indicator
Day & Night	Auto(ICR)/Color/BW/Schedule
Backlight Compensation	BLC, HLC, WDR
Wide Dynamic Range	150 dB
Digital Noise Reduction	SSNR V
Digital Image Stabilization	Support(built-in gyro sensor)
Defog	Support
Motion Detection	8ea, 8point polygonal zones
Privacy Masking	32ea, polygonal Support - Color: Grey/Green/Red/Blue/Black/White - Mosaic
Gain Control	Manual / Max
White Balance	ATW, NARROW ATW, Manual, AWC, OUTDOOR, INDOOR, MERCURY, SODIUM
LDC	None
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (2~1/12,000sec)
Video Rotation	Flip&Mirror
Analytics	Directional detection, Fog detection, Face detection, Motion detection, Appear/Disappear, Enter/Exit, Loitering, Tampering, Virtual line, Shock detection * Audio detection, Sound classification(with NW I/O Box)
Business Intelligence	None
Serial Interface	None
Alarm I/O	None
Alarm Triggers	Analytics, Network disconnect * Alarm input(with NW I/O Box)
Alarm Events	File upload via FTP and e-mail Notification via e-mail SD/SDHC/SDXC or NAS recording at event triggers PTZ Preset * Alarm output(with NW I/O Box)
Audio In	None
Audio Out	None
Wiper / Waterdrop removal	Spinning Dry, Heat film

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-EM-20T0860-R2

Page (5) of (35)

<b>Network</b>	
Ethernet	RJ-45(10/100BASE-T)
Video Compression	H.265/H.264,MJPEG
Resolution	1920x1080, 1280x1024, 1280x960, 1280x720, 1024x768, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240
Max. Framerate	H.265/H.264: Max. 60fps/50fps(60Hz/50Hz) MJPEG: Max. 30fps/25fps(60Hz/50Hz)
Smart Codec	Manual(Sea area), WiseStreamII
Video Quality Adjustment	H.264/H.265: Target bitrate level control MJPEG: Target bitrate level control
Bitrate Control	H.264/H.265: CBR or VBR MJPEG: VBR
Streaming	Unicast(20 users) / Multicast (128 user) Multiple streaming(Up to 10 profiles)
Audio Compression	None
Protocol	IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP,RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour,LLDP, SRTP
Security	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access log 802.1X Authentication(EAP-TLS, EAP-LEAP) Device certificate(Hanwha Techwin Root CA)
Edge Storage	Micro SD/SDHC/SDXC 2slot 1TB
Application Programming Interface	ONVIF Profile S/G/T SUNAPI(HTTP API) Wisenet open platform
Webpage Language	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek
Web Viewer	Supported OS: Windows 7, 8.1, 10, Mac OS X 10.10, 10.11, 10.12 Recommended Browser: Google Chrome Supported Browser: MS Explore11, MS Edge, Mozilla Firefox(Window 64bit only), Apple Safari(Mac OS X only)
Memory	4GB RAM, 512MB Flash
<b>Environmental</b>	
Operating Temperature / Humidity	-40°C~+50°C (-40°F ~ +122°F) / Less than 95% RH(Non-condensing) Start up should be done at above -30°C Maximum Temperature : +55°C(+131°F), intermittent Absolute maximum(According to NEMA TS2, 2.2.7) : +74°C
Storage Temperature / Humidity	-50°C~+60°C (-58°F~+140°F) / Less than 95% RH(Non-condensing)
Certification	IP66, IK10(Body only), NEMA4X, NEMA TS 2.2.8, NEMA TS 2.2.9
<b>Electrical</b>	
Input Voltage	PoE+(IEEE802.3at, Class4, Type 2)
Power Consumption	HPoE Max. 25W, Typ. 20W
<b>Mechanical</b>	
Color / Material	White / body(Aluminum),dome(PC)
RAL Code	None
Product dimensions / weight	Ø158x293mm, 3.1Kg
Conduit hole	None
Hanging mount(Dome)	None
Skin cover(Dome)	None
Weather cap(Dome)	None
Power module	None
Backbox	None

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr



## 1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 230 Vac ☒ 120 Vac ☐ 24 Vac ☐ 12 Vdc ☐ PoE

Frequency ☐ 50 Hz ☒ 60 Hz ☐ Hz

## 1.2 Variant Model Differences

Addition of derivative models for place of sale management

## 1.3 Device Modifications

Not applicable

## 1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	XNP-6400	-	HANWHA VISION VIETNAM COMPANY LIMITED	EUT
PoE Adapter 1	PT-PSE109GBRO- AH-S	-	Dongguan PROCET Network Technology Co.,Ltd	EUT

## 1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
PoE Adapter 2	GS728TPP V1H1	-	-	-
Notebook 1	P95G001	8KM8HT2	Wistron Infocom (Chengdu) Company Limited	-
Notebook 1 Adapter	LA65NS2-01	-	LITE-ON TECHNOLOGY (CHANGZHOU)CO.,LTD.	-
Notebook 2	LG15N54	410NZXE015458	LG Electronics	-
Notebook 2 Adapter	ADP-90WH B	84ZW19F1747	DELTA ELECTRONICS (JIANGSU) LTD.	-
Micro SD Card	-	-	-	16 GB



## 1.6 External I/O Cabling

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (EUT)	RJ-45	PoE Adapter 1 (EUT)	RJ-45	2.5	S
	Slot	Micro SD Card	Slot	-	-
PoE Adapter 1 (EUT)	Optical	PoE Adapter 2	Optical	5.0	U
	RJ-45	Notebook 1	RJ-45	4.0	S
PoE Adapter 2	RJ-45	Notebook 2	RJ-45	2.0	U

\* Unshielded=U, Shielded=S

## 1.7 EUT Operating Mode(s)


Test Mode	operating
Operation mode	EUT Monitoring, Ping Test

EUT Test operating S/W		
Name	Version	Manufacture Company
Web Viewer	-	Hanwha Vision Co., Ltd

## 1.8 Configuration

■ AC Main

□ DC Main

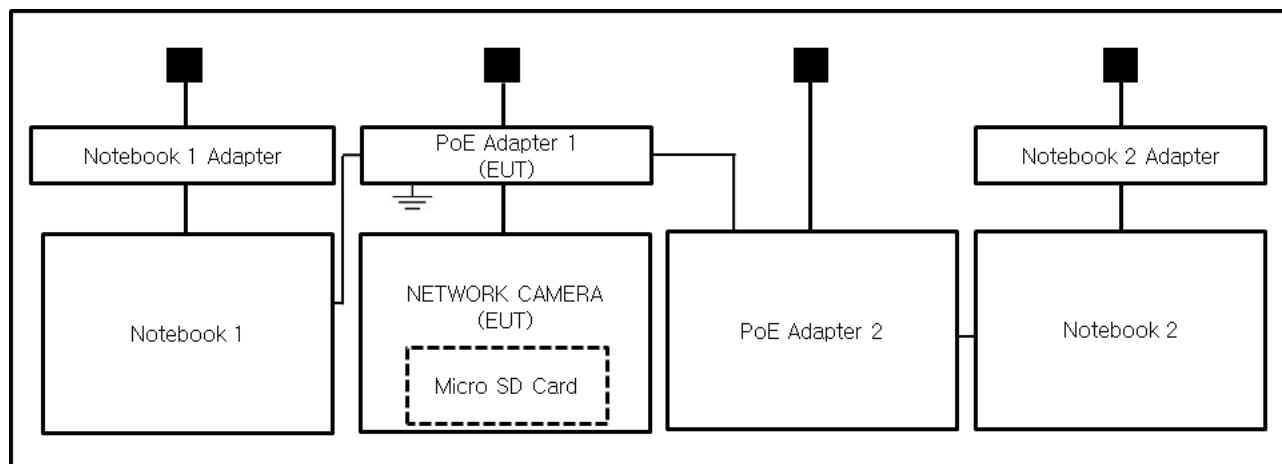

## 1.9 Remarks when standards applied

N/A







## 1.10 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

## 1.11 Test Facility

The measurement facility is located at 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea, Republic of. The sites are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-4:2019

## 1.12 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
KOREA	RRA	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
International	KOLAS	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KT489
USA	FCC	3 m & 10 m Semi-Anechoic Chamber Conducted test site to perform FCC Part 15/18 measurements.	 KR0100
Canada	ISED	3 m & 10 m Semi-Anechoic Chamber and Conducted test site	 23298
JAPAN	VCCI	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site)	 C-20136, T-20137, R-20181, G-20176
Europe	TÜV SÜD	EMI (3 m & 10 m Semi-Anechoic Chamber and conducted test site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 CARAT 001633 0004



## 2.0 Test Regulations

The emissions tests were performed according to following regulations:

☐ **EMC – Directive 2014/30/EU**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1  
☐ Class A

☐ Group 2  
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☐ EN 55032:2015

☐ Class A

☐ Class B

☐ EN 55024:2010

☐ EN 50130-4:2011 +A1:2014

☐ EN 61000-3-2:2014

☐ EN 61000-3-3:2013

☐ EN 61326-1:2013

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-EM-20T0860-R2

Page (11) of (35)

- 
- |  |   |                                  |
|--|---|----------------------------------|
| <input type="checkbox"/> <b>VCCI-CISPR 32:2016</b>                       | <input type="checkbox"/> Class A            | <input type="checkbox"/> Class B |
| <input type="checkbox"/> <b>AS/NZS CISPR32:2015</b>                      | <input type="checkbox"/> Class A            | <input type="checkbox"/> Class B |
| <input checked="" type="checkbox"/> <b>47 CFR Part 15, Subpart B</b>     |   |                                  |
| <input type="checkbox"/> CISPR 22:2009 +A1:2010                          | <input type="checkbox"/> Class A            | <input type="checkbox"/> Class B |
| <input checked="" type="checkbox"/> ANSI C63.4-2014                      | <input checked="" type="checkbox"/> Class A | <input type="checkbox"/> Class B |
| <input checked="" type="checkbox"/> <b>IC Regulation ICES-003 : 2016</b> |   |                                  |
| <input type="checkbox"/> CAN/CSA CISPR 22-10                             | <input type="checkbox"/> Class A            | <input type="checkbox"/> Class B |
| <input checked="" type="checkbox"/> ANSI C63.4-2014                      | <input checked="" type="checkbox"/> Class A | <input type="checkbox"/> Class B |
| <input type="checkbox"/> <b>RE- Directive 2014/53/EU</b>                 |   |                                  |
| <input type="checkbox"/> EN 301 489-1 V1.9.2                             |   |                                  |
| <input type="checkbox"/> Equipment for fixed use                         |   |                                  |
| <input type="checkbox"/> Equipment for vehicular use                     |   |                                  |
| <input type="checkbox"/> Equipment for portable use                      |   |                                  |
| <input type="checkbox"/> EN 301 489-3 V1.6.1                             |   |                                  |
| <input type="checkbox"/> EN 301 489-17 V2.2.1                            |   |                                  |
| <input type="checkbox"/> EN 60945:2002                                   |   |                                  |

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-EM-20T0860-R2

Page (12) of (35)

## 2.1 Conducted Emissions at Mains Power Ports

**Test Date**

Nov. 13, 2020

**Test Location**

Electro wave Shieldroom #6

**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EMC32	R & S	9.12.00	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESR3	R & S	101783	01, 20, 2021
<input checked="" type="checkbox"/>	LISN	ENV216	R & S	101787	01, 02, 2021
<input checked="" type="checkbox"/>	LISN	ESH2-Z5	R & S	100450	01, 02, 2021
<input checked="" type="checkbox"/>	PULSE LIMITER	ESH3-Z2	R & S	101915	01, 02, 2021

**Test Conditions**

Temperature:

23,4 °C

Relative Humidity:

46,8 % R.H.

**Frequency Range of Measurement**

150 kHz to 30 MHz

**Instrument Settings**

IF Band Width: 9 kHz

**Test Results**

The requirements are:

- ☒ PASS  
☐ NOT PASS  
☐ NOT APPLICABLE

**Remarks**See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-EM-20T0860-R2

Page (13) of (35)

## 2.2 Radiated Electric Field Emissions(Below 1 GHz)

**Test Date**

Nov. 13, 2020

**Test Location**☐ OPEN AREA TEST SITE #2☒ SEMI ANECHOIC CHAMBER #4(10m)**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESU26	R & S	100551	04, 01, 2021
<input checked="" type="checkbox"/>	AMPLIFIER	SCU 01	R & S	100603	11, 25, 2021
<input checked="" type="checkbox"/>	TRILOG-BROADBAND ANTENNA	VULB9163	Schwarzbeck	715	11, 29, 2020
<input checked="" type="checkbox"/>	ATTENUATOR	8491A	HP	32173	03, 10, 2021

**Test Conditions**

Temperature: 23,3 °C

Relative Humidity: 47,1 % R.H.

**Frequency Range of Measurement**

30 MHz to 1 GHz

**Instrument Settings**

IF Band Width: 120 kHz

**Test Results**

The requirements are:

- ☒ PASS  
☐ NOT PASS  
☐ NOT APPLICABLE

**Remarks**See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Report No.:

KES-EM-20T0860-R2

Page (14) of (35)

## 2.3 Radiated Electric Field Emissions(Above 1 GHz)

**Test Date**

Nov. 13, 2020

**Test Location**

SEMI ANECHOIC CHAMBER #4(10 m)

**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test S/W	EP5/RE	TOYO Corporation	6.0.0	-
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESU26	R & S	100551	04, 01, 2021
<input checked="" type="checkbox"/>	PREAMPLIFIER	8449B	AGILENT	3008A01742	01, 02, 2021
<input type="checkbox"/>	ATTENUATOR	8491A	HP	35496	03, 10, 2021
<input checked="" type="checkbox"/>	HORN ANTENNA	BBHA 9120D	SCHWARZBECK	9120D-1802	12, 13, 2020

**Test Conditions**

Temperature: 23,3 °C  
Relative Humidity: 47,1 % R.H.

**Frequency Range of Measurement**

1 GHz to 5 GHz

**Instrument Settings**

IF Band Width: 1 MHz

**Test Results**

The requirements are:

- ☒ PASS  
☐ NOT PASS  
☐ NOT APPLICABLE

**Remarks**See Appendix A for test data.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr


## APPENDIX A – TEST DATA

### Conducted Emissions at Mains Power Ports

HOT LINE

#### Common Information

Test Description: Conducted Emission  
 Model No.: XNP-6400  
 Phase:  
 Mode: H  
 Operator Name: KES

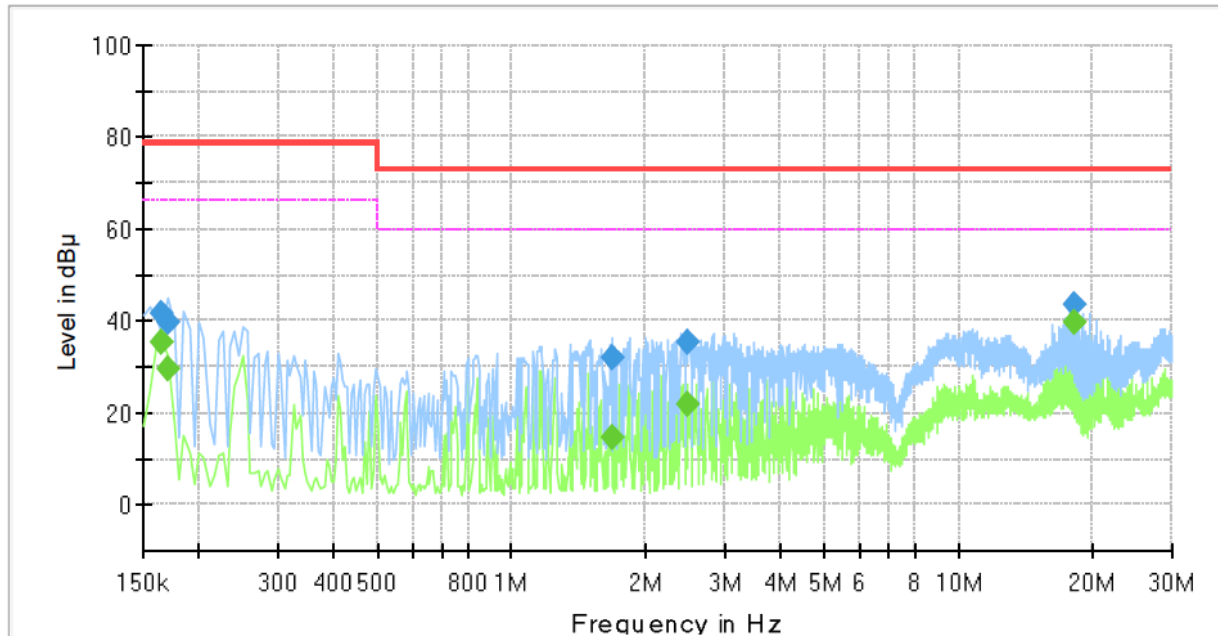

#### Final Result


Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.165000	---	35.34	66.00	30.66	1000.0	9.000	L1	19.5
0.165000	41.68	---	79.00	37.32	1000.0	9.000	L1	19.5
0.170000	---	29.45	66.00	36.55	1000.0	9.000	L1	19.5
0.170000	39.49	---	79.00	39.51	1000.0	9.000	L1	19.5
1.675000	---	14.56	60.00	45.44	1000.0	9.000	L1	20.2
1.675000	31.98	---	73.00	41.02	1000.0	9.000	L1	20.2
2.475000	---	21.77	60.00	38.23	1000.0	9.000	L1	20.2
2.475000	35.26	---	73.00	37.74	1000.0	9.000	L1	20.2
18.245000	---	39.74	60.00	20.26	1000.0	9.000	L1	20.2
18.245000	43.53	---	73.00	29.47	1000.0	9.000	L1	20.2

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact kes@kes.co.kr

## NEUTRAL LINE

## Common Information

Test Description:	Conducted Emission
Model No.:	XNP-6400
Phase:	
Mode:	N
Operator Name:	KES

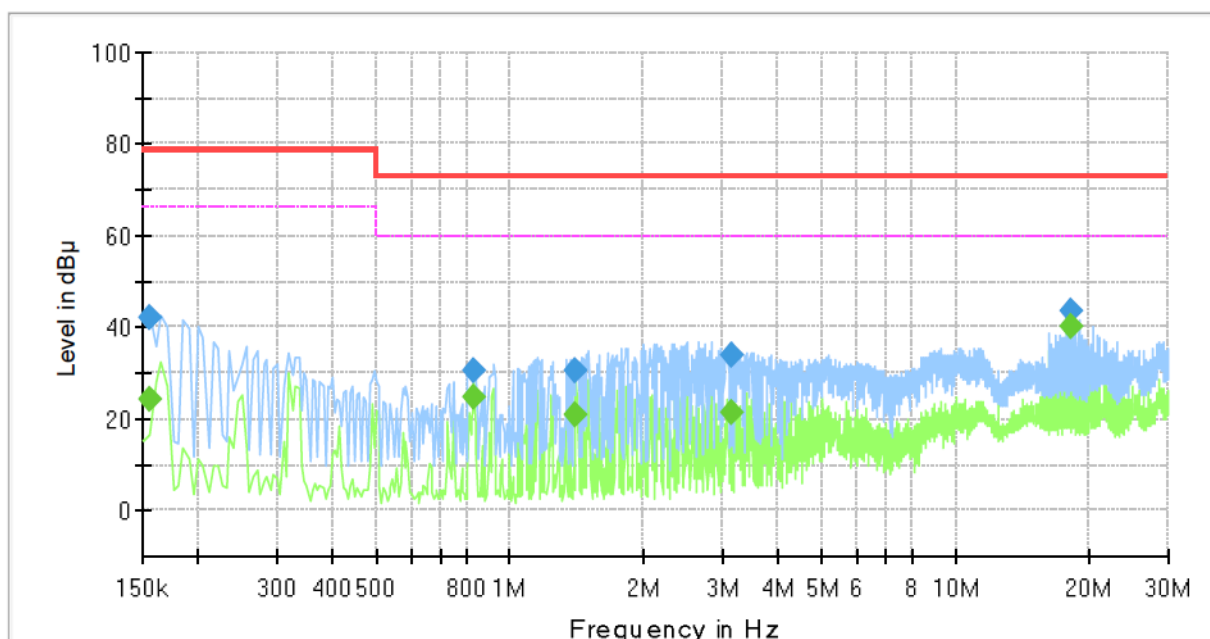

## Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.155000	---	24.06	66.00	41.94	1000.0	9.000	N	19.4
0.155000	42.17	---	79.00	36.83	1000.0	9.000	N	19.4
0.830000	---	24.56	60.00	35.44	1000.0	9.000	N	20.0
0.830000	30.44	---	73.00	42.56	1000.0	9.000	N	20.0
1.405000	---	20.83	60.00	39.17	1000.0	9.000	N	20.2
1.405000	30.49	---	73.00	42.51	1000.0	9.000	N	20.2
3.160000	---	21.27	60.00	38.73	1000.0	9.000	N	20.0
3.160000	33.78	---	73.00	39.22	1000.0	9.000	N	20.0
18.245000	---	39.96	60.00	20.04	1000.0	9.000	N	20.2
18.245000	43.73	---	73.00	29.27	1000.0	9.000	N	20.2

### ◆ Calculation

$$\text{QuasiPeak [dBuV]} / \text{CAverage [dBuV]} = \text{Reading Value [dBuV]} + \text{Corr. [dB]}$$

QuasiPeak / CAverage : The Final Value

Reading Value : Not shown in the table.

Corr. : Correction values (LISN FACTOR + (Cable Loss + Pulse Limiter FACTOR))


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact kes@kes.co.kr



## Radiated Electric Field Emissions(Below 1 GHz)

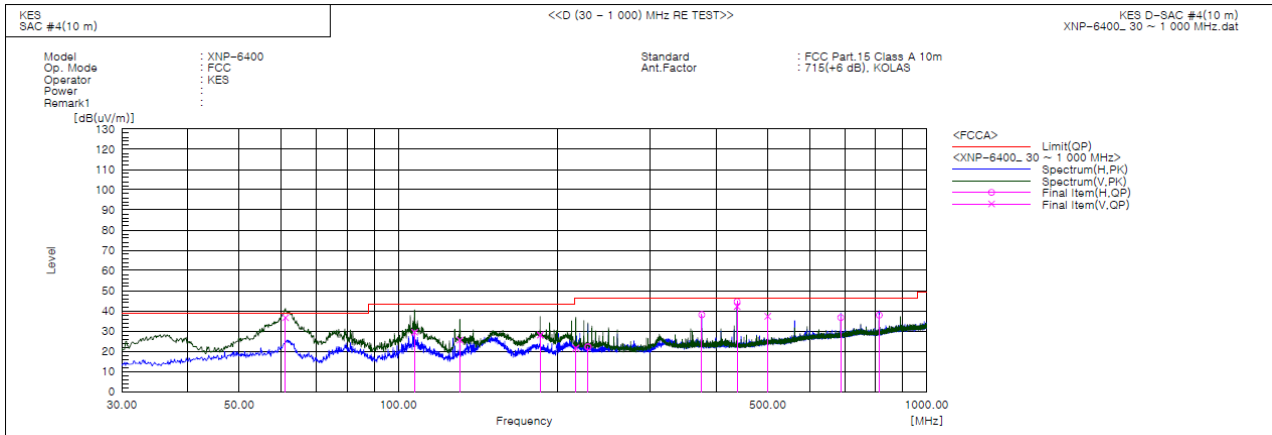

### Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	61.161	V	59.4	-22.7	36.7	39.0	2.3	115.0	87.0	
2	107.358	V	52.0	-22.6	29.4	43.5	14.1	120.0	64.0	
3	130.880	V	51.2	-25.6	25.6	43.5	17.9	108.0	233.0	
4	185.564	V	51.3	-23.3	28.0	43.5	15.5	150.0	181.0	
5	216.725	V	42.3	-20.8	21.5	46.5	25.0	148.0	253.0	
6	228.486	H	42.6	-20.4	22.2	46.5	24.3	364.0	338.0	
7	375.078	H	53.9	-15.8	38.1	46.5	8.4	385.0	105.0	
8	437.528	V	57.1	-14.9	42.2	46.5	4.3	231.0	172.0	
9	437.536	H	59.5	-14.9	44.6	46.5	1.9	296.0	87.0	
10	499.965	V	50.1	-12.8	37.3	46.5	9.2	214.0	29.0	
11	687.660	H	45.4	-8.7	36.7	46.5	9.8	185.0	177.0	
12	812.669	H	45.6	-7.7	37.9	46.5	8.6	359.0	214.0	

### ◆ Calculation – SAC #4(10 m)

Result(QP) [dB(μV/m)] = (Reading(QP)[dB(μV)] + c.f[dB(1/m)])


Margin(QP)[dB] = Limit[dB(μV/m)] - Result(QP) [dB(μV/m)]

Reading(QP) : Reading value, Result(QP) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamplifier Factor), Margin: Margin value



## Radiated Electric Field Emissions(Above 1 GHz)

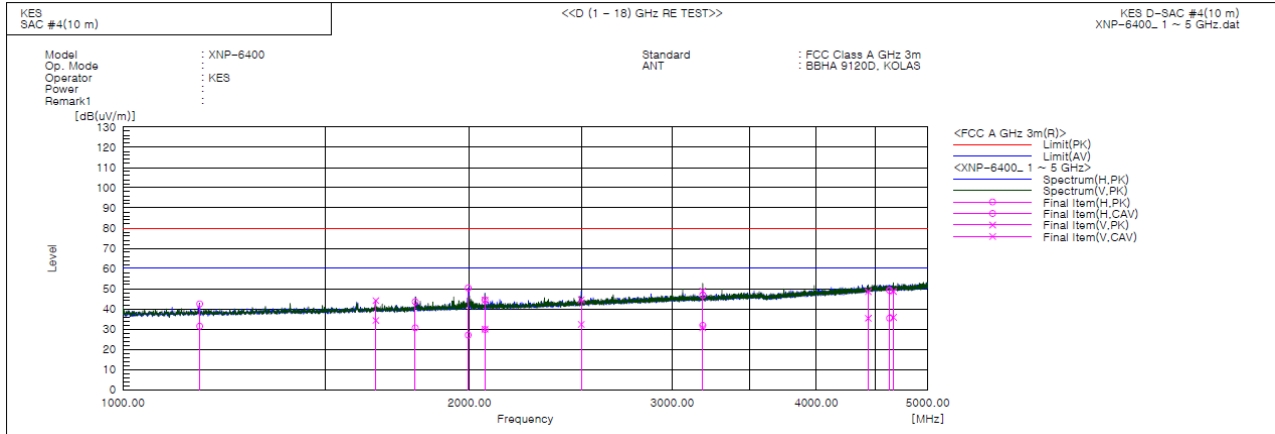

### Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result CAV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin CAV [dB]	Height [cm]	Angle [deg]	Remark
1	1166.000	H	46.9	35.8	-4.4	42.5	31.4	80.0	60.0	37.5	28.6	325.0	248.0	
2	1658.000	V	46.0	36.2	-1.9	44.1	34.3	80.0	60.0	35.9	25.7	106.0	249.0	
3	1794.500	H	44.9	31.9	-1.3	43.6	30.6	80.0	60.0	36.4	29.4	364.0	244.0	
4	1994.835	H	50.8	27.4	-0.4	50.4	27.0	80.0	60.0	29.6	33.0	199.0	349.0	
5	2062.489	V	44.5	30.1	-0.1	44.4	30.0	80.0	60.0	35.6	30.0	118.0	295.0	
6	2062.500	H	44.6	29.9	-0.1	44.5	29.8	80.0	60.0	35.5	30.2	256.0	334.0	
7	2500.000	V	42.5	30.3	2.1	44.6	32.4	80.0	60.0	35.4	27.6	125.0	303.0	
8	3187.500	V	43.9	25.7	5.0	48.9	30.7	80.0	60.0	31.1	29.3	152.0	287.0	
9	3188.000	H	41.8	26.8	5.0	46.8	31.8	80.0	60.0	33.2	28.2	369.0	306.0	
10	4438.000	V	38.4	25.3	10.1	48.5	35.4	80.0	60.0	31.5	24.6	146.0	283.0	
11	4632.000	H	38.2	24.4	11.0	49.2	35.4	80.0	60.0	30.8	24.6	391.0	40.0	
12	4667.000	V	37.5	24.8	11.1	48.6	35.9	80.0	60.0	31.4	24.1	100.0	241.0	

### ◆ Calculation

Result(PK/CAV) [dB(μV/m)] = (Reading(PK/CAV)[dB(μV)] + c.f[dB(1/m)])

Margin(PK/CAV)[dB] = Limit[dB(μV/m)] - Result(PK/CAV) [dB(μV/m)]

Reading(PK/CAV) : Reading value, Result(PK/CAV) : Reading value + Factor value

Limit(QP) : Limit value, c.f : (ANT Factor + Cable Loss - Preamp Factor), Margin: Margin value



## Test Setup Photos and Configuration

### Conducted Emissions at Mains Power Ports




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## Radiated Electric Field Emissions(Below 1 GHz)

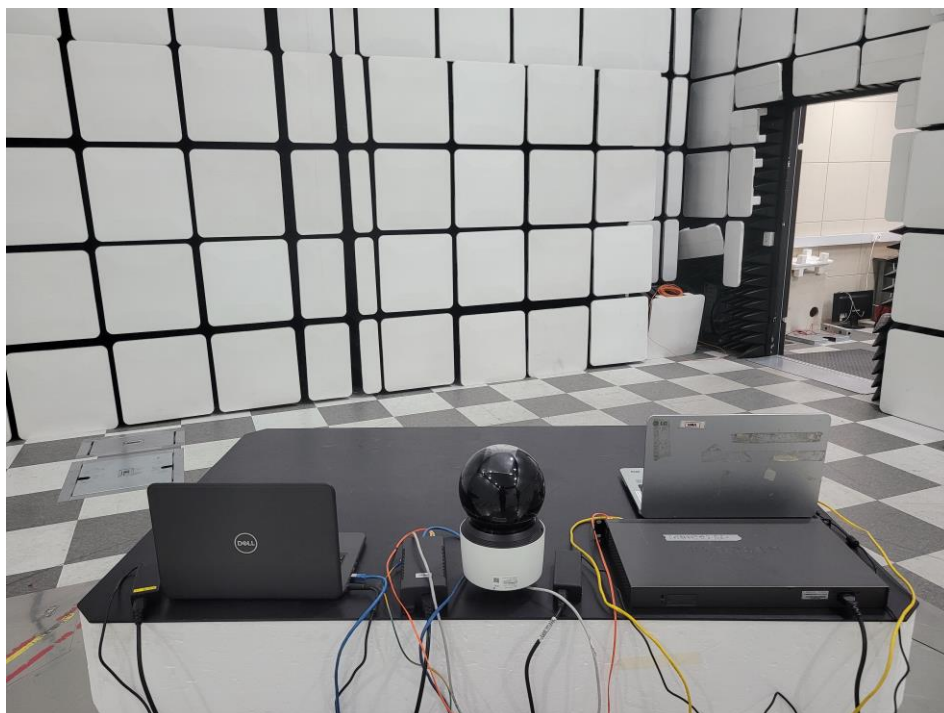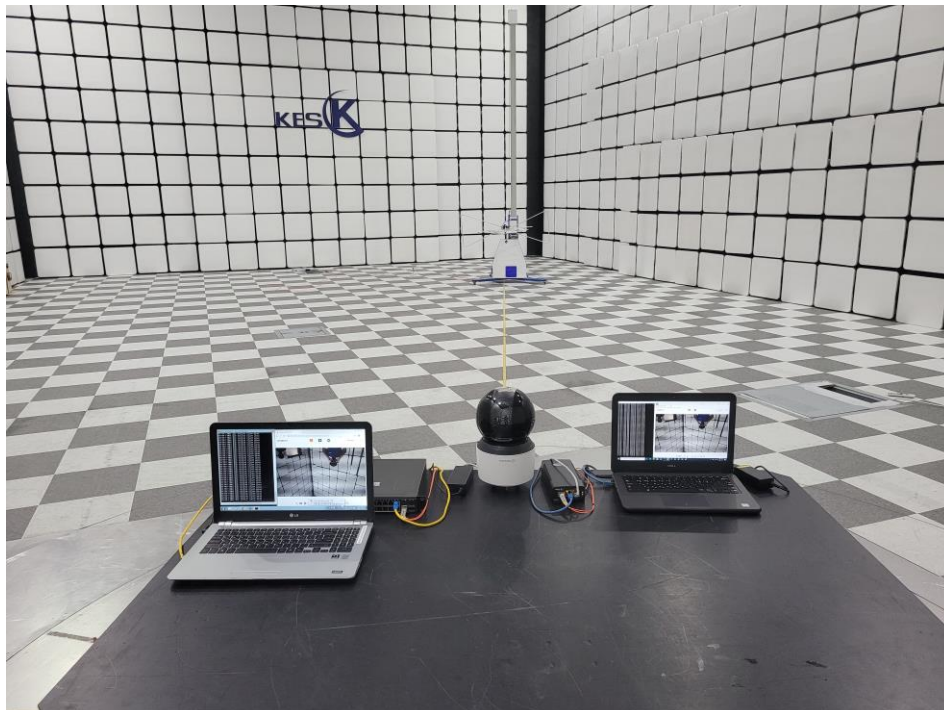

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## Radiated Electric Field Emissions(Above 1 GHz)

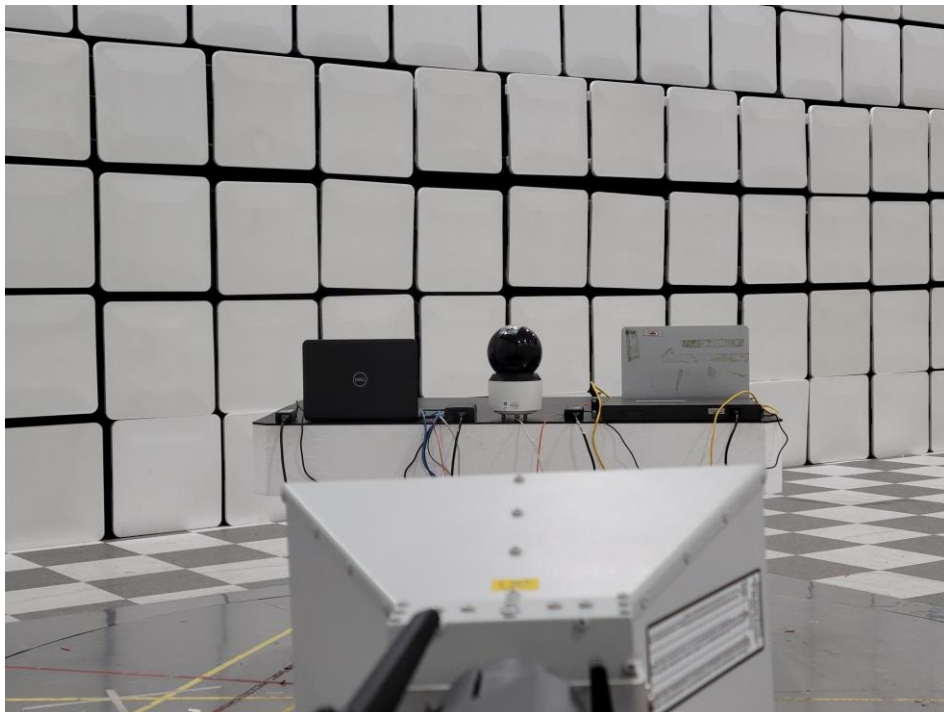

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr


## **EUT Internal Photographs**

(Internal View)




## EUT Internal View – Main Board

(Top)

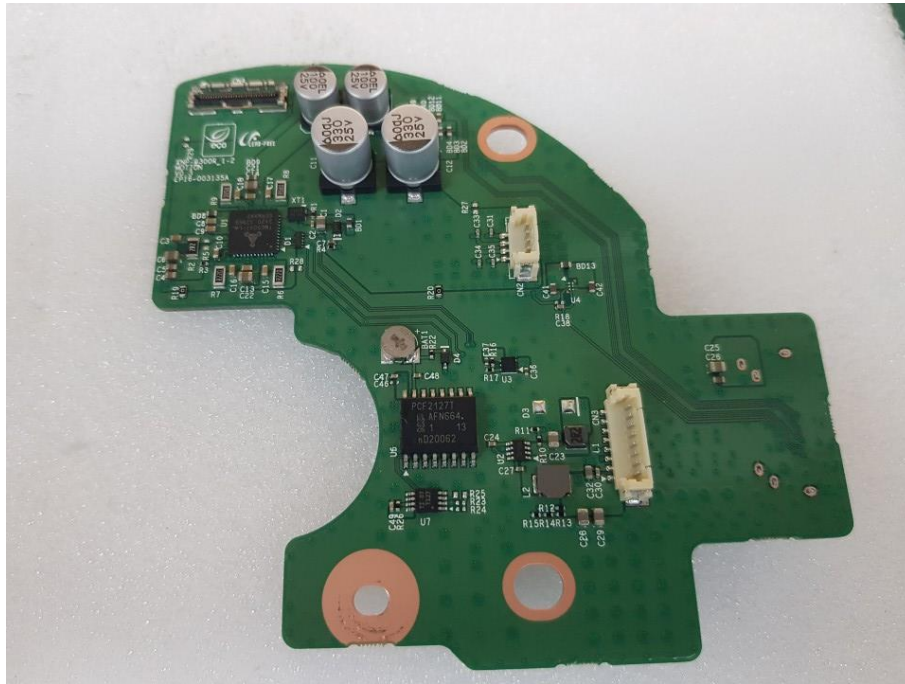

(Bottom)

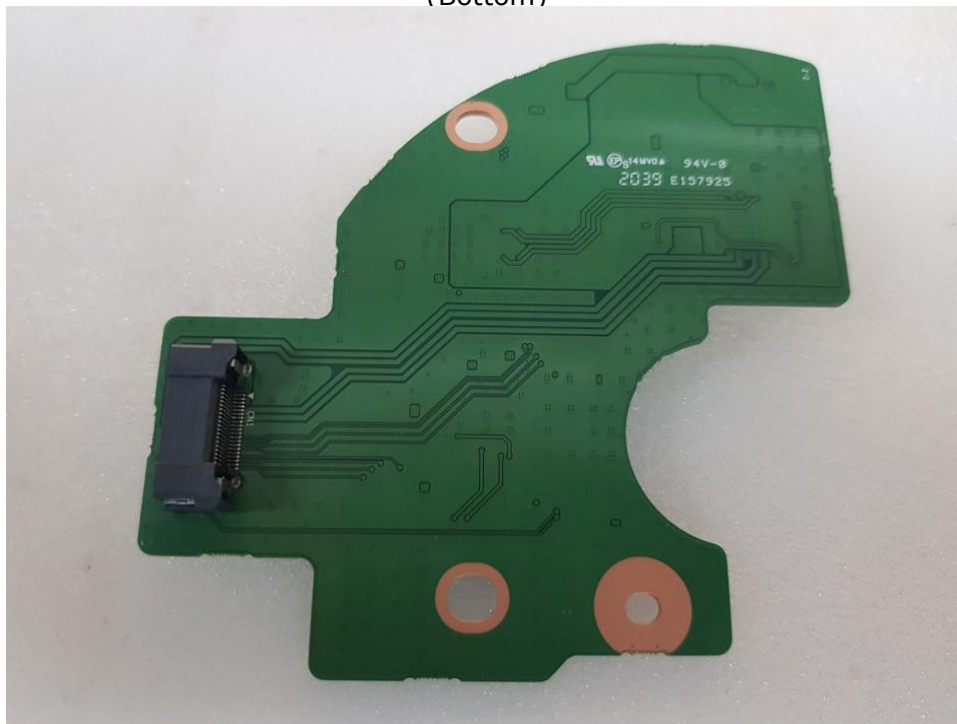

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact kes@kes.co.kr

**EUT Internal View – Sub Board 1**

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## EUT Internal View – Sub Board 2

(Top)




(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
 The authenticity of the test report, contact kes@kes.co.kr

## EUT Internal View – Sub Board 3

(Top)

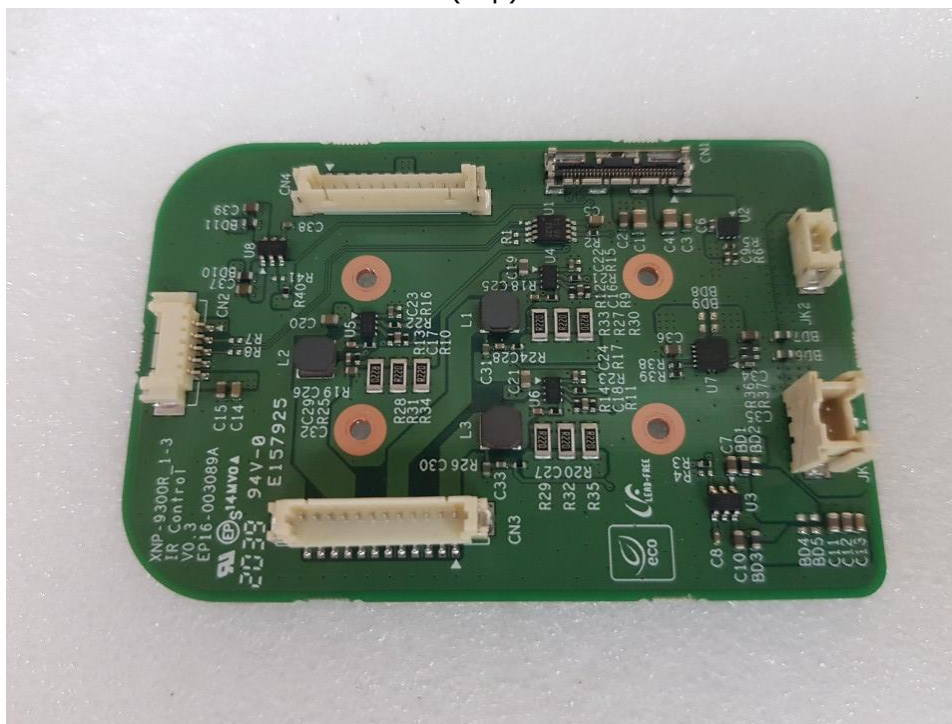


(Bottom)

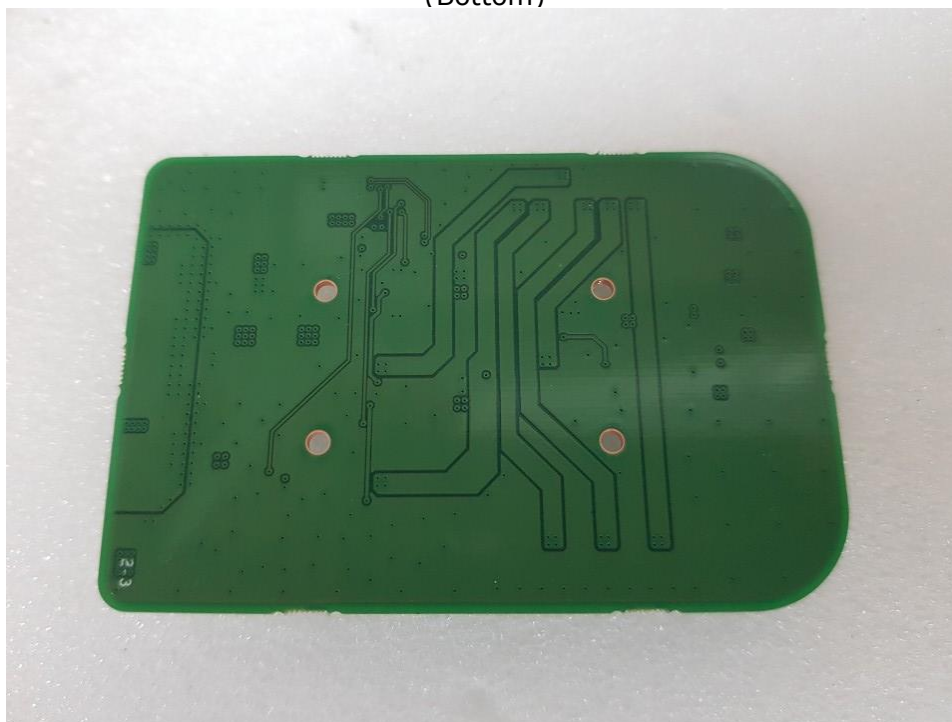

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## EUT Internal View – Sub Board 4

(Top)

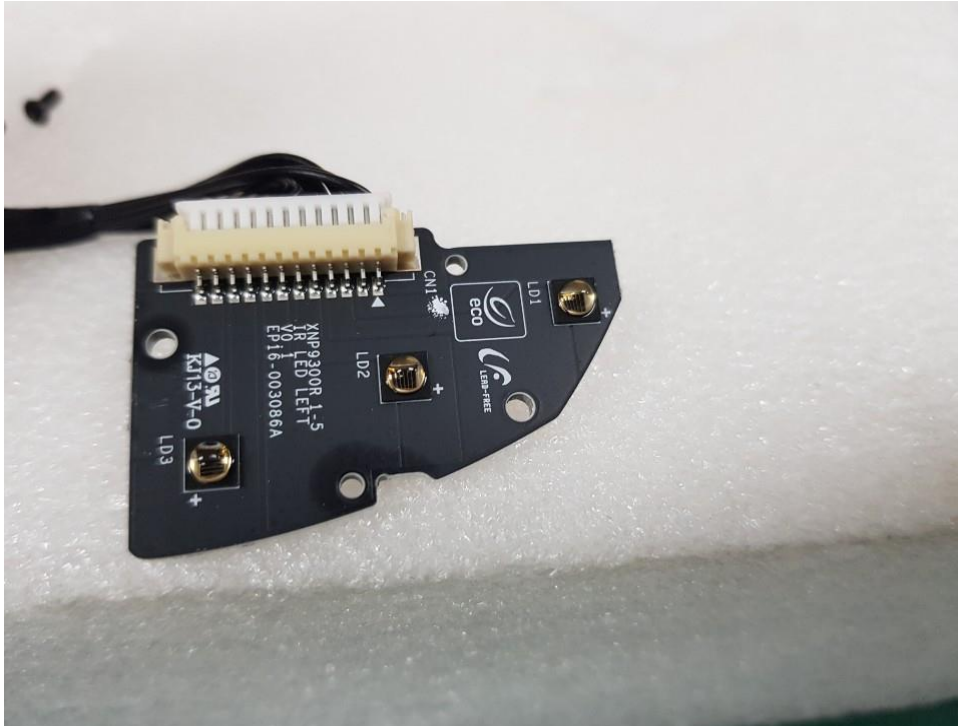

(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## EUT Internal View – Sub Board 5

(Top)



(Bottom)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## EUT Internal View – Sub Board 6

(Top)



(Bottom)

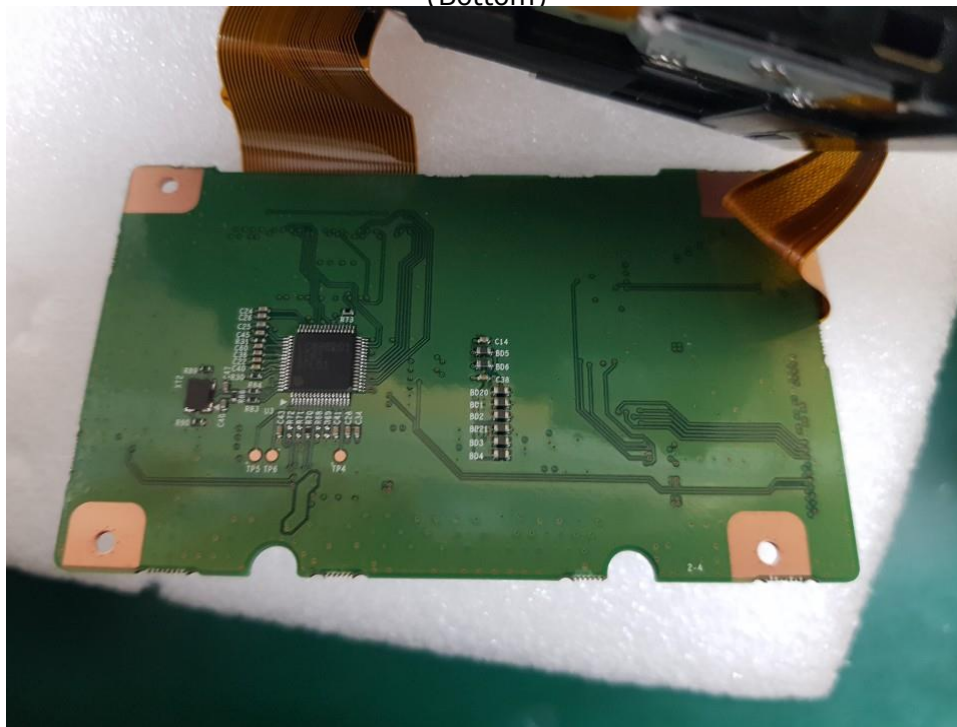


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## EUT Internal View – Sub Board 7

(Top)




(Bottom)

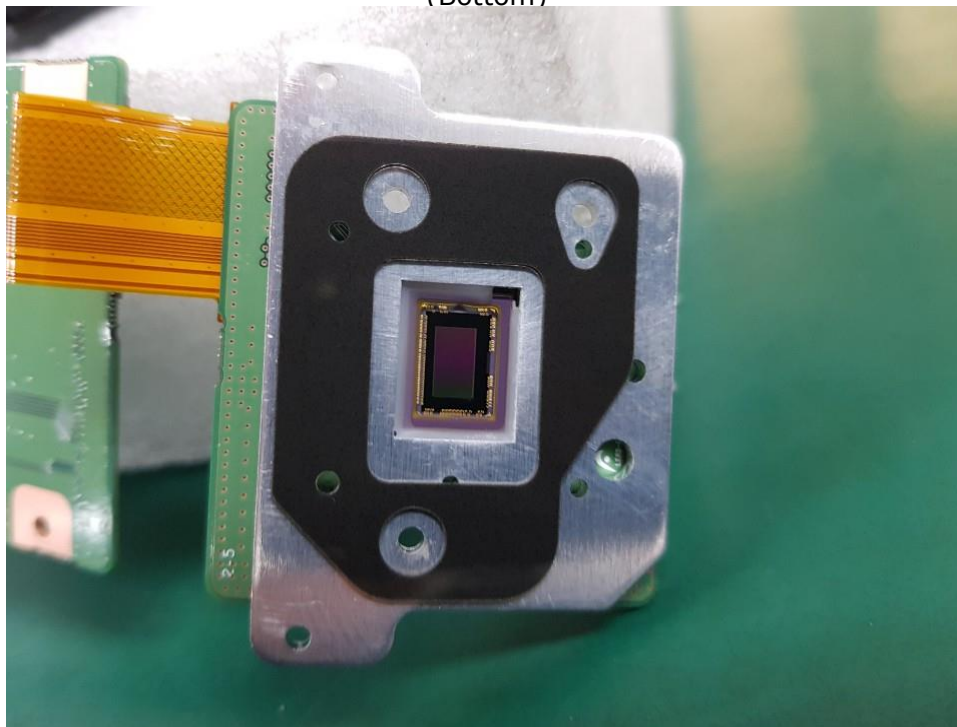


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## EUT Internal View – Sub Board 8

(Top)

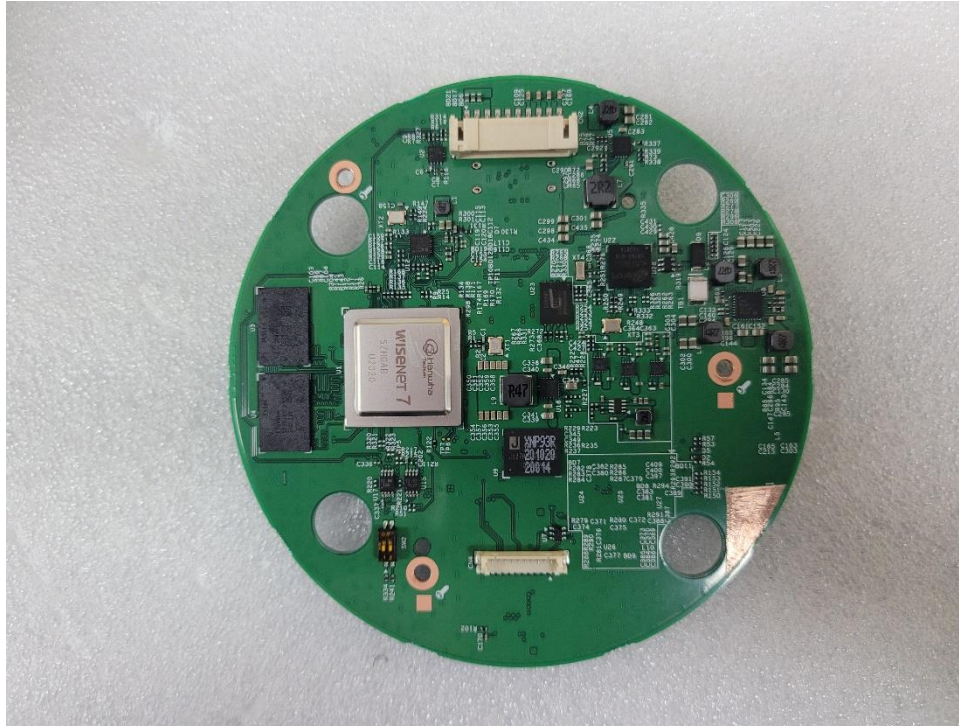


(Bottom)

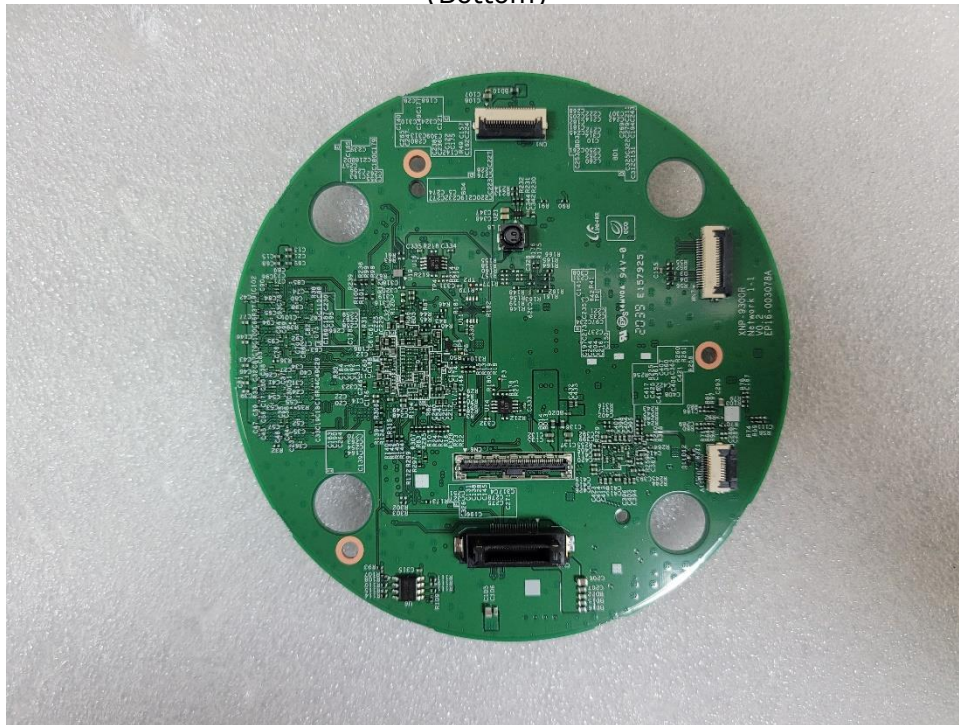


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## **EUT Internal View – CAMERA LENS Board**

(Top)

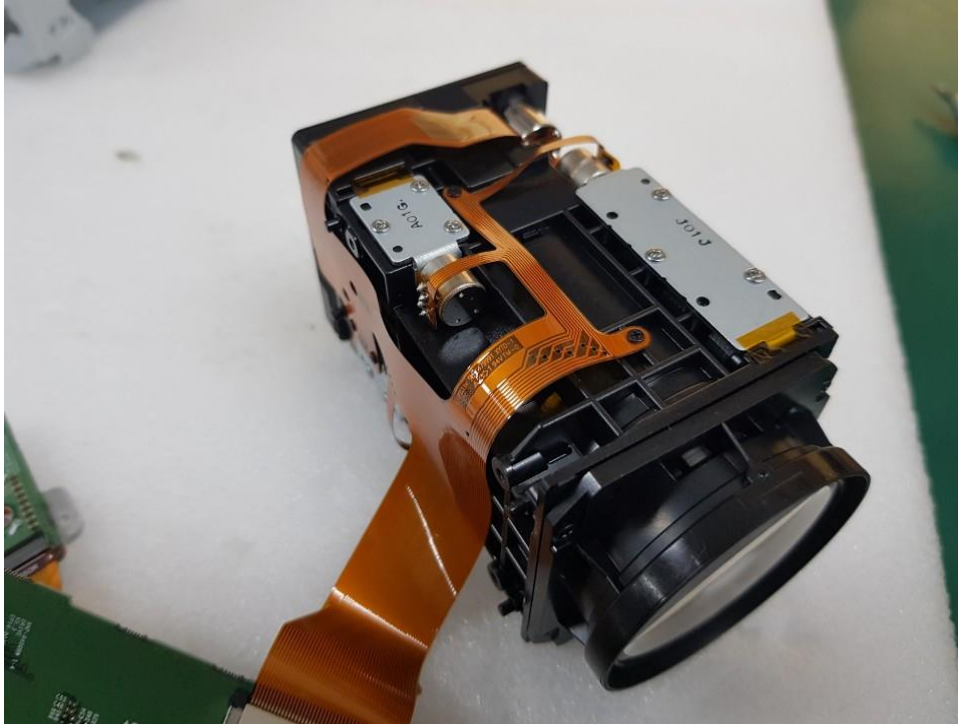

(Bottom)

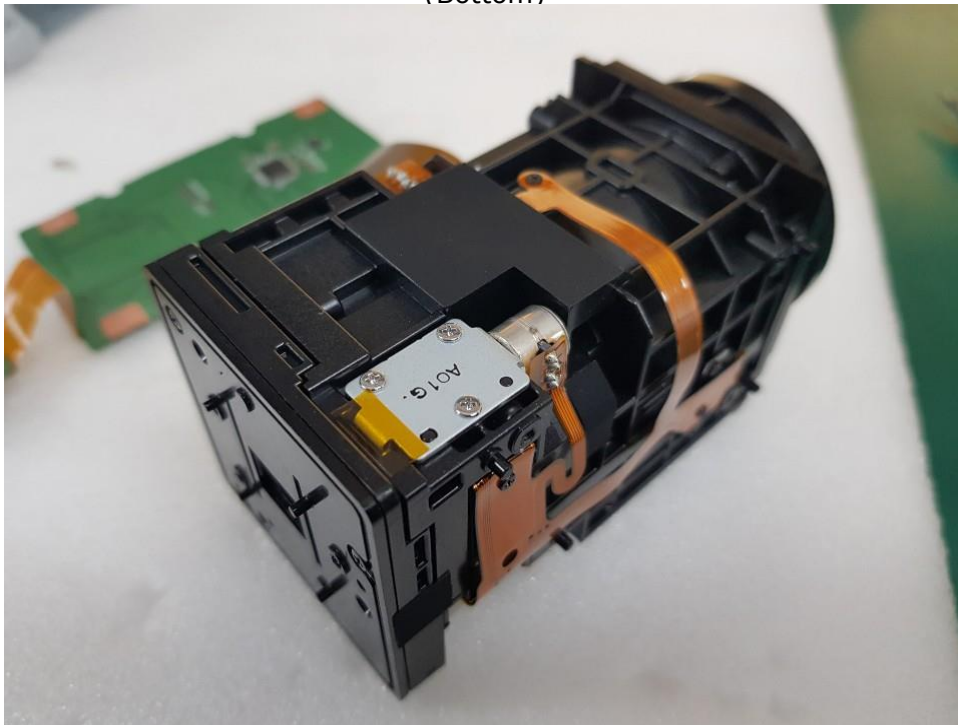

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## EUT Internal View – PoE Adapter

(Top)




(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.  
The authenticity of the test report, contact kes@kes.co.kr

## Label Photographs

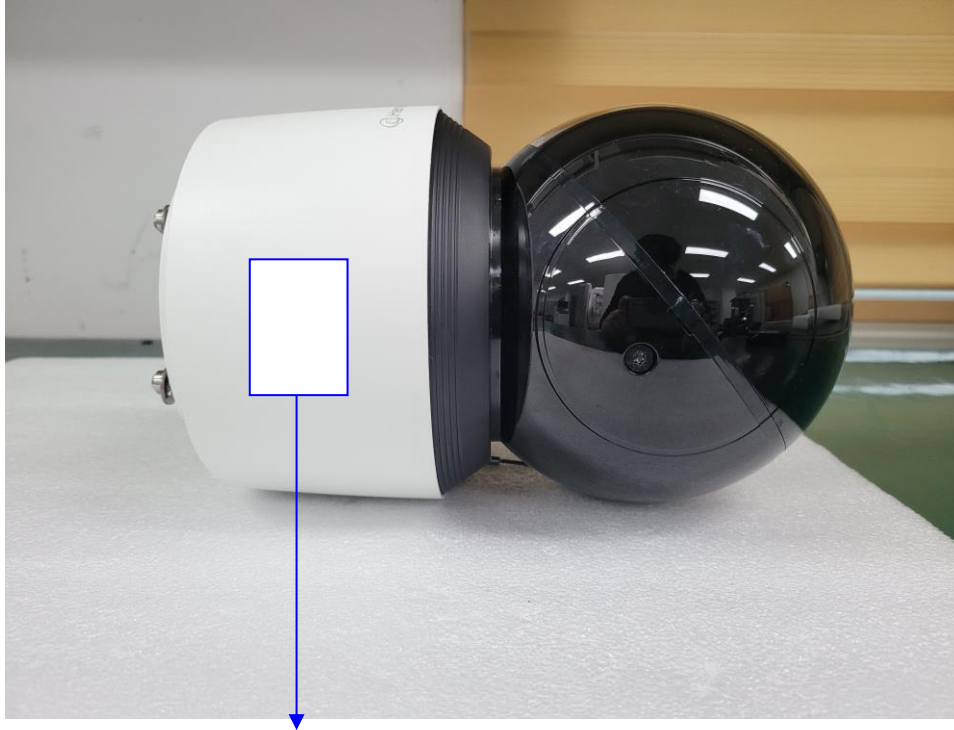

CAN ICES-3(A) / NMB-3(A)

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

(1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.