



4, Songju-ro 236beon-gil, Yangji-myeon, Cheoin-gu, Yongin-si, Gyeonggi-do,
17159, Korea

Tel: +82-31-323-6008 Fax: +82-31-323-6010

<http://www.ltalab.com>

EMC TEST REPORT

Dates of Tests: May 03, 2019

Test Report S/N: LR500121905F

Test Site : LTA Co., Ltd.

Model No.

QNO-6032R

APPLICANT

Hanwha Techwin Co., Ltd.

Equipment Name : NETWORK CAMERA
Manufacturer : Hanwha Techwin (Tianjin) Co., Ltd.
Model name : QNO-6032R
Additional Model name : QNO-6022R, QNO-6012R
Test Device Serial No.: : Identification
Rule Part(s) : AS/NZS CISPR 32:2015
CISPR 32 Ed2.0

Date of issue : May 03, 2019

This test report is issued under the authority of:

The test was supervised by:

Young Kyu Shin, Technical Manager

Gi Won Lee, Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

NVLAP[®]
TESTING NVLAP LAB CODE 200723-0

Revision	Date of issue	Test report No.	Description
0	03.05.2019	LR5001121905F	Initial

TABLE OF CONTENTS

1. General information’s4

2. Information’s about test item5

3. Test Report8

 3.1 Summary of tests8

 3.2.1 Conducted emissions9

 3.2.2 Radiated Emission15

APPENDIX A TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS.....23

APPENDIX B PERFORMANCE CRITERIA25

APPENDIX C PHOTOGRAPHS27

1. General information's

1-1 Test Performed

Company name : **LTA Co., Ltd**
 Address : 4, Songju-ro 236beon-gil, Yangji-myeon, Cheoin-gu, Yongin-si, Gyeonggi-do, 17159, Korea
 Web site : <http://www.ltalab.com>
 E-mail : chahn@ltalab.com
 Telephone : +82-31-323-6008
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	2019-09-30	ECT accredited Lab.
RRA	KOREA	KR0049	-	EMC accredited Lab.
FCC	U.S.A	649054	2021-04-11	FCC CAB
VCCI	JAPAN	C-4948,	2020-09-10	VCCI registration
		T-2416,	2020-09-10	
		R-4483(10 m),	2020-10-15	
		G-10847	2022-06-13	
IC	CANADA	5799A-2	2019-06-15	IC filing
KOLAS	KOREA	NO.551	2021-08-20	KOLAS accredited Lab.

2. Information's about test item

2-1 Client / Manufacturer

Company name : Hanwha Techwin Co., Ltd.
 Address : 6, Pangyo-ro 319 Beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do, 13488, KOREA
 Telephone /Facsimile : +82-70-7147-8753(<http://hanhwa-security.com>)

Factory #1

Company name : Hanwha Techwin (Tianjin) Co., Ltd.
 Address : No.11 Weiliu Rd, Micro-Electronic Industrial Park, TEDA, Tianjin, 300385, People's Republic of China

Factory #2

Company name : HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.
 Address : Lot O-2, Que Vo Industrial Zone extended area ,Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam

Factory #3

Company name : D-TECH CO.,LTD.
 Address : 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi-do, Korea (Suwon Industrial Complex)

2-2 Equipment Under Test (EUT)

Class : A
 Category : NETWORK CAMERA
 Model name : QNO-6032R
 Additional Model name : QNO-6022R, QNO-6012R
 Additional Models are different only lens specification.
 Serial number : Identification
 Date of receipt : April 09, 2019
 EUT condition : Pre-production, not damaged
 Interface Ports : DC IN, LAN, Alarm IN, Alarm OUT, Alarm Ground, MIC
 Video OUT Port is a management Port.
 Power rating : DC 12 V (Adapter), DC 48 V (PoE)

2-3 Modification

-NONE

2-4 Test conditions

Temp. / Humid. / Pressure : (22 - 24) °C / (31 - 41) % R.H.
 Tested Model : QNO-6032R
 Test mode : REC mode (Adapter), REC mode (POE)
 Test Voltage : AC 240 V, 50 Hz (Adapter, PoE)

2-5 EUT

Equipment	Model No.	Serial No.	Manufacturer
NETWORK CAMERA	QNO-6032R	N/A	Hanwha Techwin (Tianjin) Co., Ltd.

2-6 Accessory / REC mode (Adapter)

Equipment	Model No.	Serial No.	Manufacturer
Notebook	P56	N/A	HANSUNG
Notebook Adapter	A10-090P3A	N/A	Chicony
Alarm	N/A	N/A	N/A
Sensor	SPL-0030	N/A	SECOM
SD Card	KTJD8K9	N/A	N/A
Adapter	AH1212-K	N/A	JENTEC TECHNOLOGY CO., LTD
Mobile Phone	Gal	N/A	SAMSUNG

/ REC mode (POE)

Equipment	Model No.	Serial No.	Manufacturer
Notebook	P56	N/A	HANSUNG
Notebook Adapter	A10-090P3A	N/A	Chicony
Alarm	N/A	N/A	N/A
Sensor	SPL-0030	N/A	SECOM
SD Card	KTJD8K9	N/A	N/A
Mobile Phone	Gal	N/A	SAMSUNG
PoE Injector	GT96300-3656-T3-APOE	N/A	GlabTek, Inc

2-8 Cable List / REC mode (Adapter)

From		To		Length (m)	Shielding	
Type	I/O Port	Type	I/O Port		Cable	backshell
EUT	DC IN	Adapter	DC OUT	1.2	NO	Plastic
	LAN	Notebook	LAN	3.0	NO	Plastic
	Alarm IN	Alarm	Alarm OUT	1.0	NO	Plastic
	Alarm OUT	Sensor	Sensor OUT	1.0	NO	Plastic
	Alarm Ground	Alarm	Alarm Ground	1.0	NO	Plastic
	Alarm Ground	Sensor	Sensor Ground	1.0	NO	Plastic
	SD Card	SD Card	-	-	-	-
	MIC	Mobile Phone	AUX	1.2	NO	Plastic
Notebook	DC IN	Notebook Adapter	DC OUT	1.5	NO	Plastic
Notebook Adapter	AC IN	AC Power Source	3 Pin AC Line	1.5	NO	Plastic

/ REC mode (POE)

From		To		Length (m)	Shielding	
Type	I/O Port	Type	I/O Port		Cable	backshell
EUT	LAN	PoE Injector	DATA/Power	3.0	NO	Plastic
	Alarm IN	Alarm	Alarm OUT	1.0	NO	Plastic
	Alarm OUT	Sensor	Sensor OUT	1.0	NO	Plastic
	Alarm Ground	Alarm	Alarm Ground	1.0	NO	Plastic
	Alarm Ground	Sensor	Sensor Ground	1.0	NO	Plastic
	SD Card	SD Card	-	-	-	-
	MIC	Mobile Phone	AUX	1.2	NO	Plastic
PoE Inejctor	DATA	PoE Injector	LAN	3.0	NO	Plastic
	AC IN	AC Power Source	3 Pin AC Line	1.5	NO	Plastic
Notebook	DC IN	Notebook Adapter	DC OUT	1.5	NO	Plastic
Notebook Adapter	AC IN	AC Power Source	3 Pin AC Line	1.5	NO	Plastic

3. Test Report

3.1 Summary of tests

Parameter	Applied Standard	Status
I. Emission		
Conducted Emission	AS/NZS CISPR32:2015	C
Radiated Emission	AS/NZS CISPR32:2015	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

3.2 EMISSION

3.2.1 Conducted emissions

Definition:

The test assesses the ability of the EUT to limit its internal noise from being present on the AC mains Power In/Output/Telecommunication ports.

We were performed the test according to LTA procedure LTA-QI-04.

Test method	: AS/NZS CISPR32:2015
Measurement Frequency range	: 150 kHz - 30 MHz
Measurement RBW	: 9 kHz
Test mode	: REC mode (Adapter), REC mode (POE)
Result	: Complies

Measurement Data:

- Refer to the Next page (Maximum emission configuration)

A sample calculation:

COR. F (correction factor)= LISN Insertion loss + Cable loss + Pulse Limiter Factor

Emission Level= meter reading + COR.F

Limits for conducted disturbance at the mains ports of class A ITE

Frequency Range	Quasi-peak	Average
(0.15 - 0.5) MHz	79 dBuV	66 dBuV
(0.5 – 30) MHz	73 dBuV	60 dBuV

Note: The limits will decrease with the frequency logarithmically within 0.15MHz to 0.5MHz

Limits for conducted disturbance at the mains ports of class B ITE

Frequency Range	Quasi-peak	Average
(0.15 – 0.5) MHz	(66 – 56) dBuV	(56 - 46) dBuV
(0.5 – 5) MHz	56 dBuV	46 dBuV
(5 – 30) MHz	60 dBuV	50 dBuV

Note: The limits will decrease with the frequency logarithmically within 0.15 MHz to 0.5 MHz

Limits of conducted common mode (asymmetric mode) disturbance at telecommunication ports in the frequency range 0.15 MHz to 30 MHz for class A equipment

Frequency Range	Voltage limits		Current limits	
	Quasi-peak	Average	Quasi-peak	Average
(0.15 - 0.5) MHz	(97 – 87) dBuV	(84 – 74) dBuV	(53 – 43) dBuV	(40 – 30) dBuV
(0.5 – 30) MHz	87 dBuV	74 dBuV	43 dBuV	30 dBuV

Note 1: The limits decrease linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Note 2: The current and voltage disturbance limits are derived for use with an impedance stabilization network (ISN) which presents a common mode (asymmetric mode) impedance of 150Ω to the telecommunication port under test (conversion factor is $20 \log_{10} 150/I = 44$ dB)

Limits of conducted common mode (asymmetric mode) disturbance at telecommunication ports in the frequency range 0.15 MHz to 30 MHz for class B equipment

Frequency Range	Voltage limits		Current limits	
	Quasi-peak	Average	Quasi-peak	Average
(0.15 - 0.5) MHz	(84 – 74) dBuV	(74 – 64) dBuV	(40 – 30) dBuV	(30 – 20) dBuV
(0.5 – 30) MHz	74 dBuV	64 dBuV	30 dBuV	20 dBuV

Note 1: The limits decrease linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Note 2: The current and voltage disturbance limits are derived for use with an impedance stabilization network (ISN) which presents a common mode (asymmetric mode) impedance of 150Ω to the telecommunication port under test (conversion factor is $20 \log_{10} 150/I = 44$ dB)

Conducted emissions (LINE) / REC mode (Adapter)



4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel:+82-31-3236008,9
Fax:+82-31-3236010

EUT /Model No. : QNO-6032R


Phase : Line

Test Mode : Rec mode (Adapter)

Test Power : 240 / 50

Temp./ Humi. : 21'C / 39% R.H.

Test Engineer : LEE G W

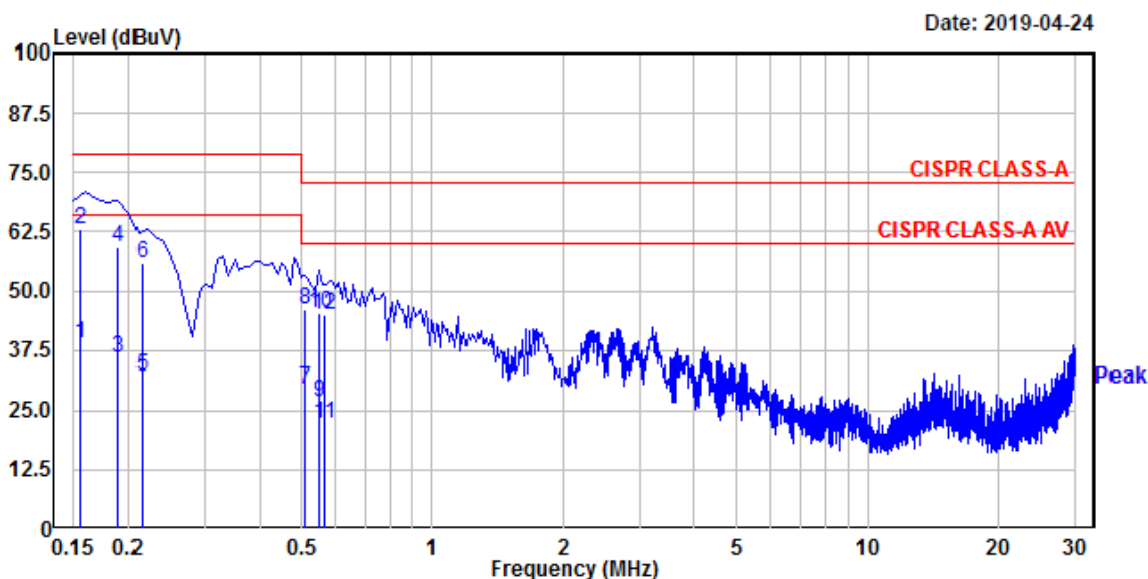

Trace: 1

Freq MHz	RD QP dBuV	RD AV dBuV	C.F dB	Result QP dBuV	Result AV dBuV	Limit QP dBuV	Limit AV dBuV	Margin QP dB	Margin AV dB
0.156	43.76	19.61	19.43	63.19	39.04	79.00	66.00	15.81	26.96
0.190	39.78	16.31	19.44	59.22	35.75	79.00	66.00	19.78	30.25
0.215	36.39	12.52	19.44	55.83	31.96	79.00	66.00	23.17	34.04
0.511	26.66	9.80	19.47	46.13	29.27	73.00	60.00	26.87	30.73
0.551	25.73	7.22	19.47	45.20	26.69	73.00	60.00	27.80	33.31
0.563	25.34	2.89	19.47	44.81	22.36	73.00	60.00	28.19	37.64

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

Conducted emissions (NEUTRAL) / REC mode (Adapter)



4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel:+82-31-3236008,9
Fax:+82-31-3236010

EUT /Model No. : QNO-6032R


Phase : Neutral

Test Mode : Rec mode (Adapter)

Test Power : 240 / 50

Temp./ Humi. : 21'C / 39% R.H.

Test Engineer : LEE G W

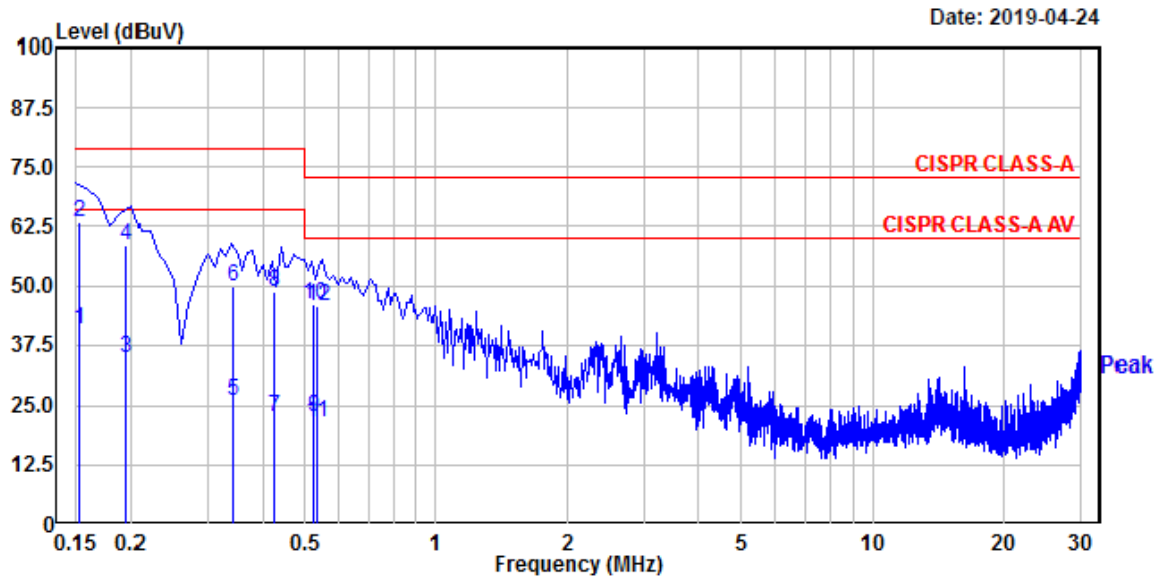

Trace: 1

Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin
MHz	QP	AV	dB	QP	AV	QP	AV	QP	AV
	dBuV	dBuV		dBuV	dBuV	dBuV	dBuV	dB	dB
0.153	43.87	21.32	19.44	63.31	40.76	79.00	66.00	15.69	25.24
0.195	39.20	15.40	19.44	58.64	34.84	79.00	66.00	20.36	31.16
0.341	30.20	6.61	19.46	49.66	26.07	79.00	66.00	29.34	39.93
0.427	29.10	3.32	19.46	48.56	22.78	79.00	66.00	30.44	43.22
0.523	26.52	3.05	19.47	45.99	22.52	73.00	60.00	27.01	37.48
0.534	26.19	2.03	19.47	45.66	21.50	73.00	60.00	27.34	38.50

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

Conducted emissions (TEL_100 M) / REC mode (Adapter)



4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel:+82-31-3236008,9
Fax:+82-31-3236010

EUT /Model No. : QNO-6032R

Phase : TEL_100M


Test Mode : Rec mode (Adapter)

Test Power : 240 / 50

Temp./ Humi. : 21'C / 39% R.H.

Test Engineer : LEE G W

Date: 2019-04-24

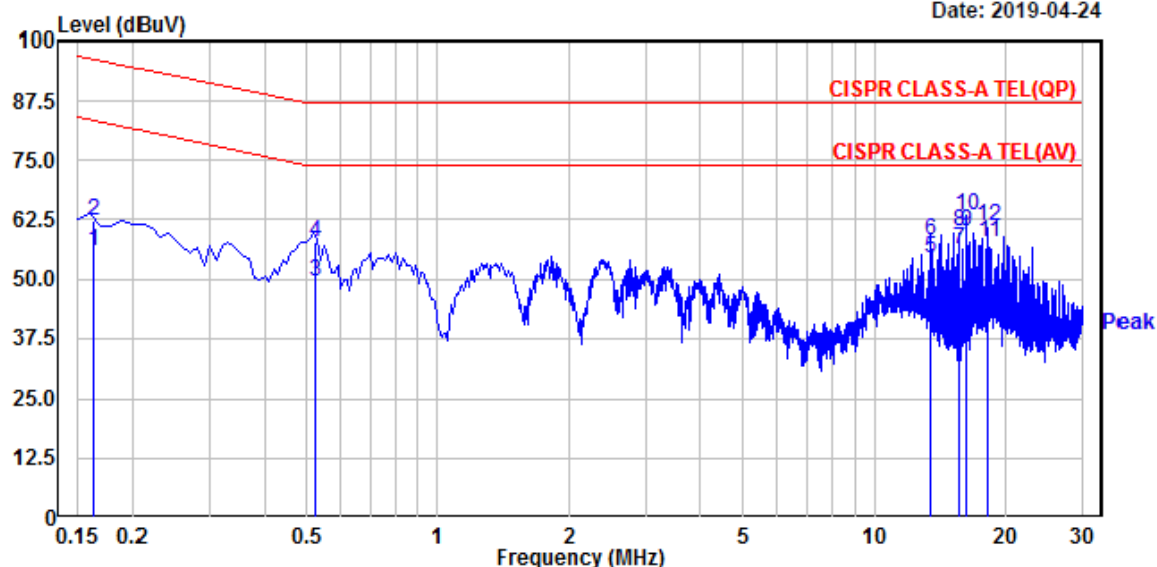

Trace: 1

Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin
MHz	QP	AV		QP	AV	QP	AV	QP	AV
	dBuV	dBuV	dB	dBuV	dBuV	dBuV	dBuV	dB	dB
0.164	42.67	35.92	19.76	62.43	55.68	96.28	83.28	33.85	27.60
0.522	38.22	29.83	19.50	57.72	49.33	87.00	74.00	29.28	24.67
13.419	38.28	34.60	19.68	57.96	54.28	87.00	74.00	29.04	19.72
15.617	40.11	36.65	19.73	59.84	56.38	87.00	74.00	27.16	17.62
16.229	43.77	40.31	19.76	63.53	60.07	87.00	74.00	23.47	13.93
18.243	41.42	37.90	19.81	61.23	57.71	87.00	74.00	25.77	16.29

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

Conducted emissions (TEL_100 M) / REC mode (PoE)



4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel:+82-31-3236008,9
Fax:+82-31-3236010

EUT /Model No. : QNO-6032R

Phase : TEL_100M


Test Mode : Rec mode (PoE)

Test Power : 240 / 50

Temp./ Humi. : 21'C / 39% R.H.

Test Engineer : LEE G W

Date: 2019-04-24

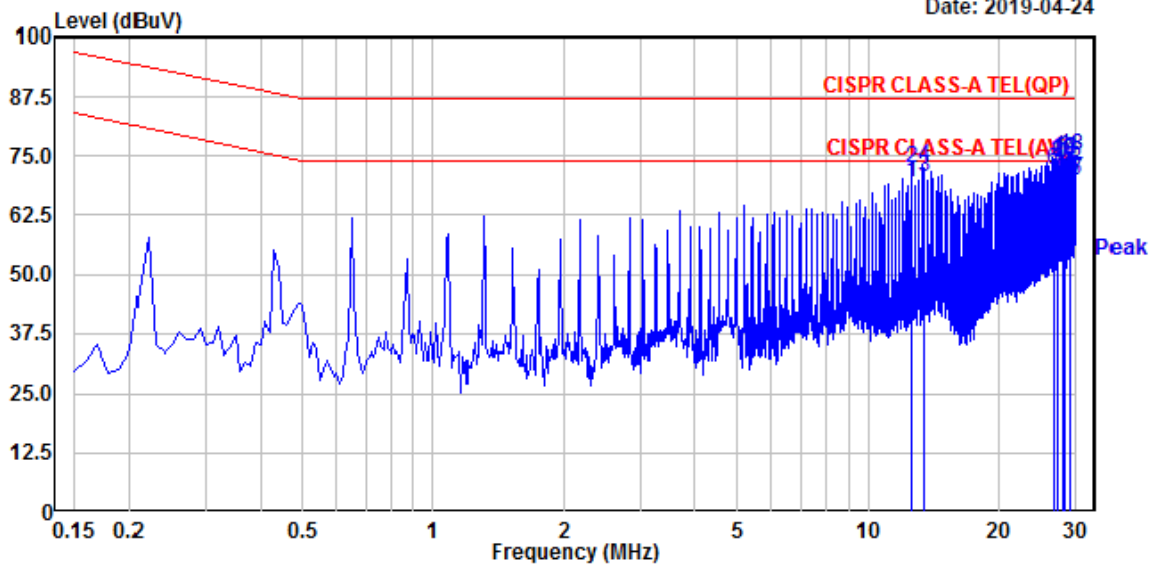

Trace: 1									
Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin
MHz	QP	AV	dB	QP	AV	QP	AV	QP	AV
	dBuV	dBuV		dBuV	dBuV	dBuV	dBuV	dB	dB
12.589	52.63	49.84	19.66	72.29	69.50	87.00	74.00	14.71	4.50
13.456	53.22	50.82	19.68	72.90	70.50	87.00	74.00	14.10	3.50
26.700	51.83	47.13	20.10	71.93	67.23	87.00	74.00	15.07	6.77
27.347	53.46	50.66	20.12	73.58	70.78	87.00	74.00	13.42	3.22
28.001	53.68	49.35	20.15	73.83	69.50	87.00	74.00	13.17	4.50
28.217	54.02	51.41	20.15	74.17	71.56	87.00	74.00	12.83	2.44
28.433	54.66	49.92	20.16	74.82	70.08	87.00	74.00	12.18	3.92
29.088	53.45	49.61	20.19	73.64	69.80	87.00	74.00	13.36	4.20
29.302	54.99	50.17	20.20	75.19	70.37	87.00	74.00	11.81	3.63

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

3.2.2 Radiated Emission

Definition:

The test assesses the ability of ancillary equipment to limit their internal noise from being radiated from the enclosure.

We were performed the test according to LTA procedure LTA-QI-04.

Test method	: AS/NZS CISPR32:2013
Measuring Distance	: 10 m for below 1 GHz
Measurement Frequency range	: 30 MHz – 1 000 MHz
Measurement RBW	: 120 kHz @ 10 m
Test mode	: REC mode (Adapter), REC mode (POE)
Result	: Complies

Measurement Data:

- Refer to the Next page (Maximum emission configuration)
- The highest internal source of an EUT is higher than 108 MHz, the measurement shall only be made up to 6 GHz.
(The highest internal source of an EUT : higher than 108 MHz)

A sample calculation:

COR. F (correction factor)= Antenna factor + Cable loss- Amp.gain- Distance correction

Emission Level= meter reading + COR.F

Limit of 10 m for below 1 GHz**CLASS A**

Frequency Range	Quasi-peak
(30 – 230) MHz	40 dBuV/m
(230 – 1 000) MHz	47 dBuV/m

CLASS B

Frequency Range	Quasi-peak
(30 – 230) MHz	30 dBuV/m
(230 – 1 000) MHz	37 dBuV/m

Limit of 3m for above 1 GHz**CLASS A**

Frequency Range	Average Limit @ 3m (dB μ V/m)	Peak limit @ 3m (dB μ V/m)
(1 000 – 3 000) MHz	56	76
(3 000 – 6 000) MHz	60	80

NOTE:

The lower limit applies at the transition frequency.

CLASS B

Frequency Range	Average Limit @ 3m (dB μ V/m)	Peak limit @ 3m (dB μ V/m)
(1 000 – 3 000) MHz	50	70
(3 000 – 6 000) MHz	54	74

NOTE:

The lower limit applies at the transition frequency.

Radiated Emission (Below 1 GHz) / V _ REC mode (Adapter)



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: QNO-6032R

Temp/Humi: 23 / 36

Test Mode : Rec mode (Adapter)

Tested by: LEE G W

Date: 2019-04-24

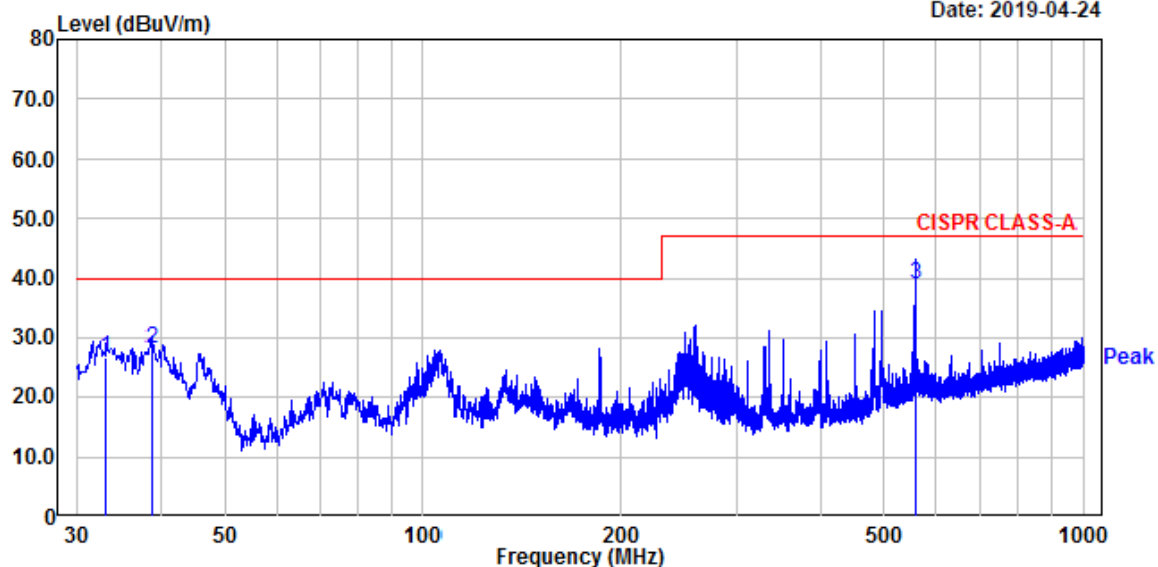

Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
MHz	dBuV	dB	QP dBuV/m	dBuV/m	dB	cm	deg	
33.11	41.61	-14.95	26.66	40.00	13.34	113	82	vertical
38.73	42.38	-14.18	28.20	40.00	11.80	100	276	vertical
556.83	45.41	-6.32	39.09	47.00	7.91	100	194	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Radiated Emission (Below 1 GHz) / H _ REC mode (Adapter)




4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: QNO-6032R

Temp/Humi: 23 / 36

Test Mode : Rec mode (Adapter)

Tested by: LEE G W

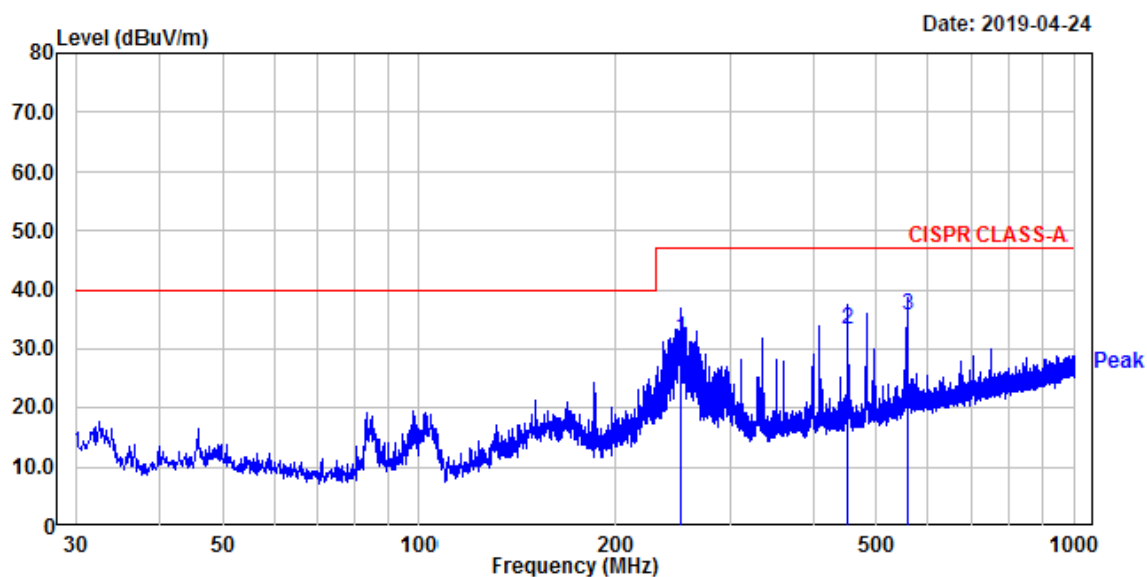

Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
MHz	dBuV	dB	QP dBuV/m	dBuV/m	dB	cm	deg	
251.60	44.57	-12.91	31.66	47.00	15.34	395	56	horizontal
450.01	41.23	-7.89	33.34	47.00	13.66	263	290	horizontal
556.83	42.07	-6.32	35.75	47.00	11.25	269	158	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Radiated Emission (Below 1 GHz) / V _ REC mode (POE)



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: QN0-6032R

Temp/Humi: 23 / 36

Test Mode : Rec mode (PoE)

Tested by: LEE G W

Date: 2019-04-24

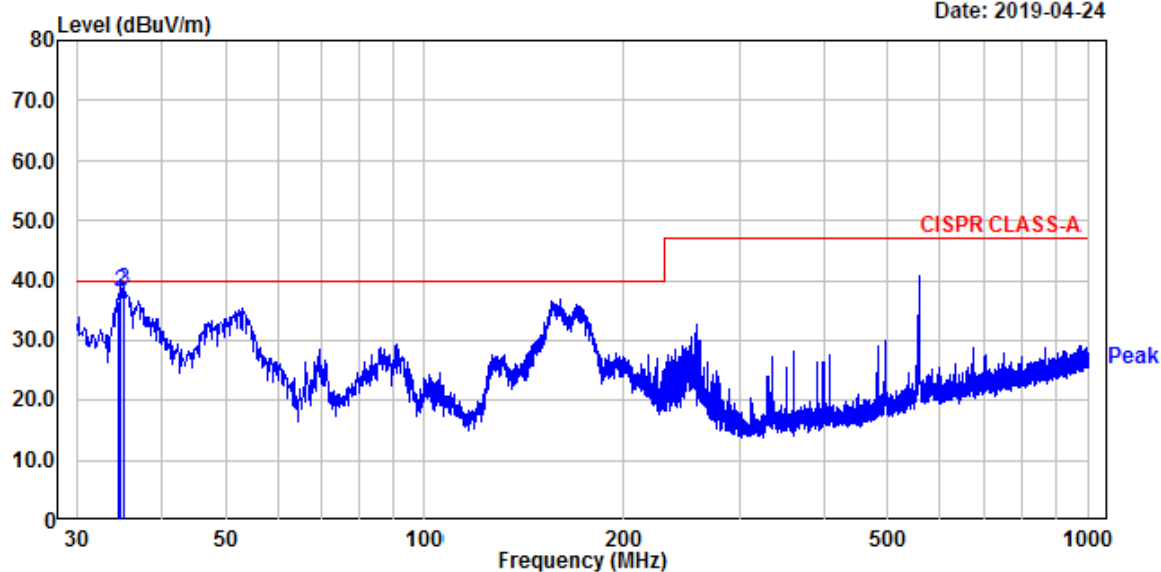

Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
MHz	dBuV	dB	QP dBuV/m	dBuV/m	dB	cm	deg	
34.61	51.28	-14.77	36.51	40.00	3.49	100	220	vertical
34.85	52.82	-14.73	38.09	40.00	1.91	106	280	vertical
35.34	53.02	-14.69	38.33	40.00	1.67	100	160	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Radiated Emission (Below 1 GHz) / H _ REC mode (POE)



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: QN0-6032R

Temp/Humi: 23 / 36

Test Mode : Rec mode (PoE)

Tested by: LEE G W

Date: 2019-04-24

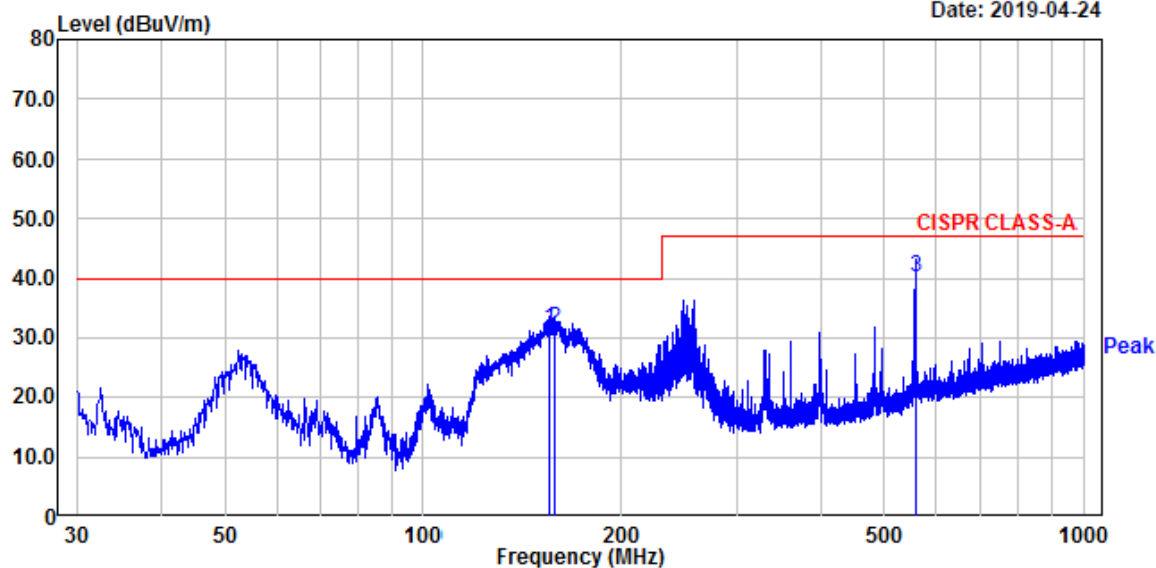

Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
MHz	dBuV	dB	QP dBuV/m	dBuV/m	dB	cm	deg	
154.89	43.83	-12.41	31.42	40.00	8.58	247	209	horizontal
158.04	43.83	-12.38	31.45	40.00	8.55	291	184	horizontal
556.83	46.55	-6.32	40.23	47.00	6.77	309	59	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Radiated Emission / REC mode (Adapter)


(Above 1 GHz) / H

EUT/Model No.: QNO-6032R

Temp/Humi: 23 / 36

Test Mode : Rec mode (Adapter)

Tested by: LEE G W

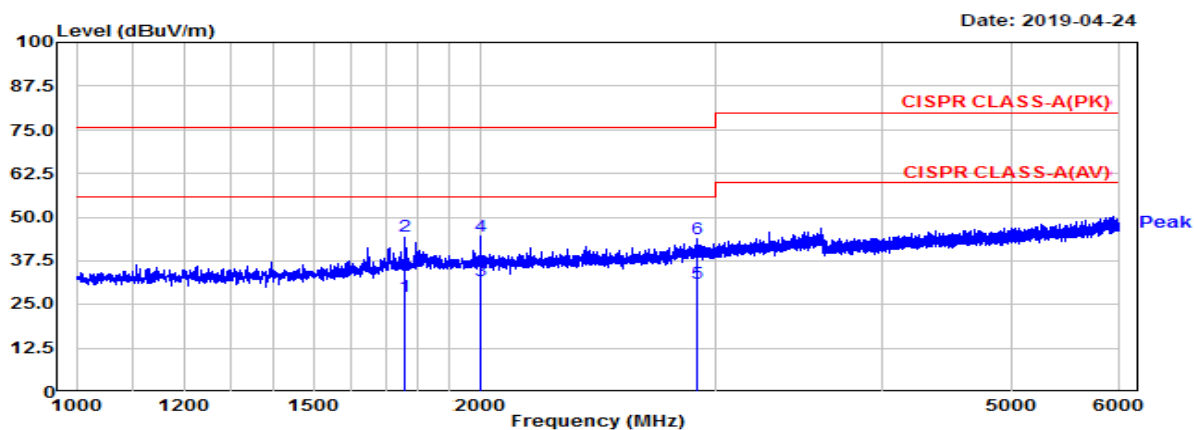


(Above 1 GHz) / V

EUT/Model No.: QNO-6032R

Temp/Humi: 23 / 36

Test Mode : Rec mode (Adapter)

Tested by: LEE G W

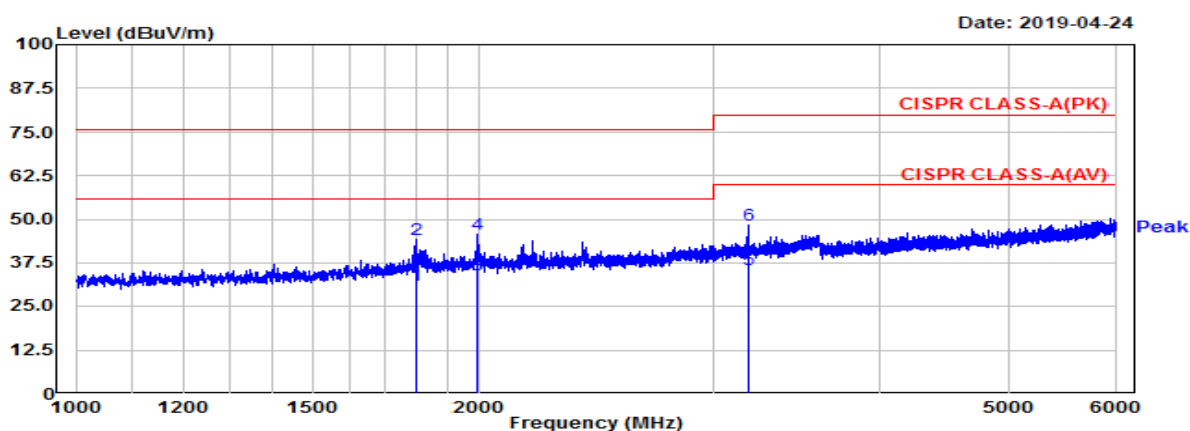

Manufacture : Hanwha Techwin (Tianjin) Co., Ltd.

Test Date

Temp.:
[°C]Humidity:
[%]Distance
(m)

Model : QNO-6032R

2019-04-24

23

36

3.8

TEST mode : Rec mode (Adapter)

Freq.(MHz)	Reading(PK)	Reading(AV)	C.F	Result(PK)	Result(AV)	Limit(PK)	Limit(AV)	Margin(PK)	Margin(AV)	Height	Angle	Polarity
MHz	dBuV	dBuV	dB	dBuV/m	dBuV/m	dBuV/m	dBuV/m	dB	dB	cm	deg	Hor/Ver
1760.00	49.4	32.1	-2.87	46.48	29.18	76.0	56.0	29.52	26.82	100	261	H
1999.30	46.4	33.4	0.30	46.69	33.69	76.0	56.0	29.31	22.31	100	345	H
2911.80	41.9	28.9	3.96	45.89	32.89	76.0	56.0	30.11	23.11	100	231	H
1800.00	47.4	34.4	-1.32	46.06	33.06	76.0	56.0	29.94	22.94	100	161	V
1993.13	47.5	35.5	0.36	47.86	35.86	76.0	56.0	28.14	20.14	100	107	V
3190.00	44.7	31.7	5.78	50.50	37.50	80.0	60.0	29.50	22.50	100	89	V

Radiated Emission / REC mode (POE)


(Above 1 GHz) / H

EUT/Model No.: QNO-6032R

Temp/Humi: 23 / 36

Test Mode : Rec mode (PoE)

Tested by: LEE G W

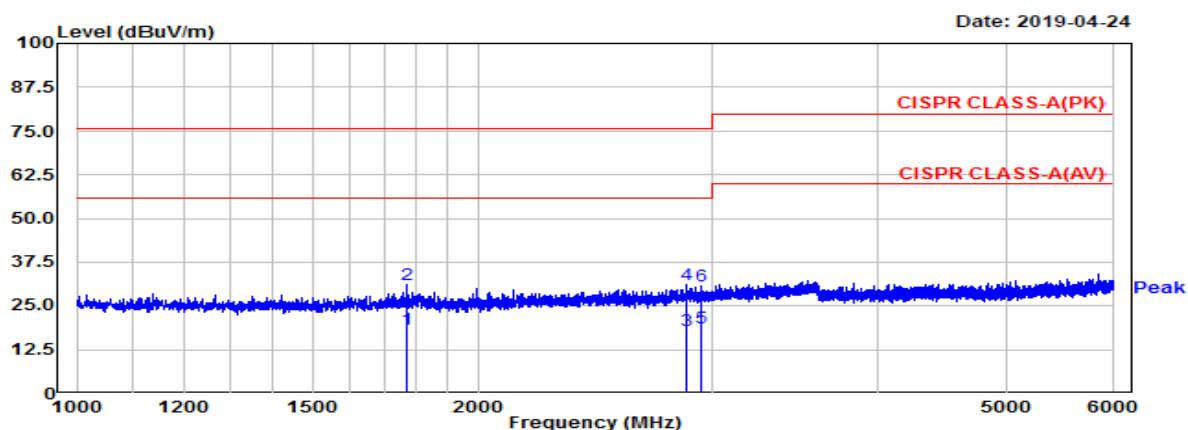


(Above 1 GHz) / V

EUT/Model No.: QNO-6032R

Temp/Humi: 23 / 36

Test Mode : Rec mode (PoE)

Tested by: LEE G W

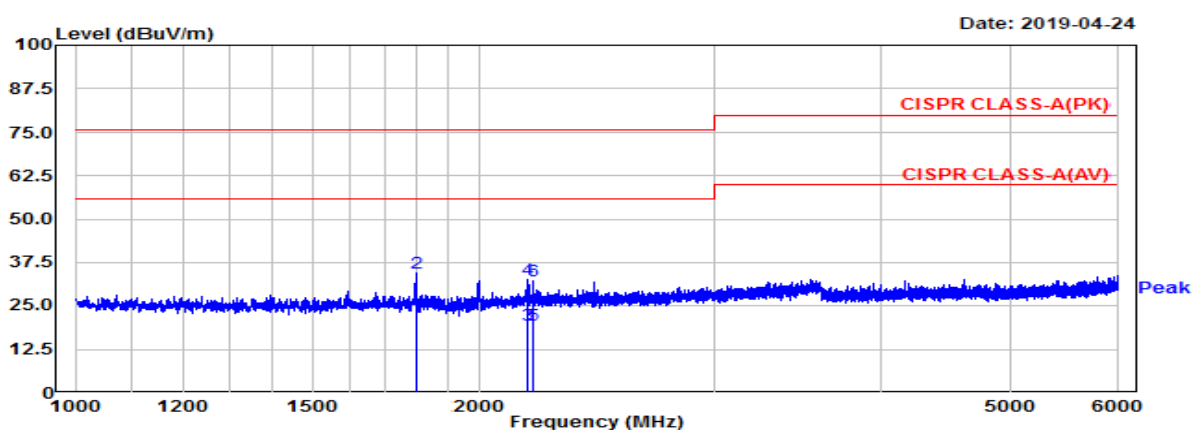

Manufacture : Hanwha Techwin (Tianjin) Co., Ltd.

Test Date

Temp.: [°C]

Humidity: [%]

Distance (m)

Model : QNO-6032R

2019-04-24

23

36

3.8

TEST mode : Rec mode (PoE)

Freq. (MHz)	Reading(PK)	Reading(AV)	C.F	Result(PK)	Result(AV)	Limit(PK)	Limit(AV)	Margin(PK)	Margin(AV)	Height	Angle	Polarity
MHz	dBuV	dBuV	dB	dBuV/m	dBuV/m	dBuV/m	dBuV/m	dB	dB	cm	deg	Hor/Ver
1767.50	45.3	32.3	-12.15	33.16	20.16	76.0	56.0	42.84	35.84	100	234	H
2875.00	40.9	27.9	-7.96	32.93	19.93	76.0	56.0	43.07	36.07	100	174	H
2942.50	40.3	25.3	-7.82	32.43	17.43	76.0	56.0	43.57	38.57	100	210	H
1798.13	47.3	34.3	-10.76	36.50	23.50	76.0	56.0	39.50	32.50	100	180	V
2169.38	43.8	30.8	-9.35	34.44	21.44	76.0	56.0	41.56	34.56	100	241	V
2192.50	43.6	30.6	-9.32	34.29	21.29	76.0	56.0	41.71	34.71	100	348	V

APPENDIX A

TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment are identified by the Test Laboratory.

Conducted Disturbance Measurements

	Item	Model Name	Manufacturer	Serial No.	Next Cal.	Interval
<input checked="" type="checkbox"/>	EMI TEST Receiver	ESR	Rohde & Schwarz	101499	2019.07.11	1 year
<input checked="" type="checkbox"/>	Pulse Limiter	ESH3-Z2	Rohde & Schwarz	100710	2020.03.16	1 year
<input type="checkbox"/>	LISN	ESH3-Z6	Rohde & Schwarz	100378	2019.09.07	1 year
<input type="checkbox"/>	LISN	ESH3-Z6	Rohde & Schwarz	101468	2019.09.07	1 year
<input checked="" type="checkbox"/>	LISN(main)	ENV216	Rohde & Schwarz	100408	2019.10.10	1 year
<input checked="" type="checkbox"/>	LISN(sub)	LT32C/10	AFJ	32031518210	2019.09.06	1 year
<input checked="" type="checkbox"/>	TEST PROGRAM	e3_ce 20181212a (V9)	AUDIX	-	-	-
<input checked="" type="checkbox"/>	ISN	ISN T800	TESEQ	27109	2019.09.12	1 year
<input type="checkbox"/>	ISN	ENY81-CA6	Rohde & Schwarz	101565	2019.09.12	1 year
<input type="checkbox"/>	CURRENT PROBE	EZ-17	Rohde & Schwarz	100508	2019.09.06	1 year

Radiated Emission – Below 1 GHz

	Item	Model Name	Manufacturer	Serial No.	Next Cal.	Interval
<input checked="" type="checkbox"/>	EMI TEST Receiver	ESU	Rohde & Schwarz	100092	2019.09.06	1 year
<input checked="" type="checkbox"/>	Amplifier (25 dB)	8447D	HP	2944A07684	2019.09.06	1 year
<input checked="" type="checkbox"/>	BILOG Antenna	VULB9168	SCHWARZBECK	775	2020.03.16 (KOLAS)	2 year
<input checked="" type="checkbox"/>	TEST PROGRAM	e3 20181212a (V9)	AUDIX	-	-	-

Radiated Emission – Above 1 GHz

	Item	Model Name	Manufacturer	Serial No.	Next Cal.	Interval
<input checked="" type="checkbox"/>	EMI TEST Receiver	ESU	Rohde & Schwarz	100092	2019.09.06	1 year
<input checked="" type="checkbox"/>	Amplifier	8449B	HP	3008A00671	2019.09.06	1 year
<input checked="" type="checkbox"/>	HORN ANTENNA	3115	ETS	114105	2019.11.03 (KOLAS)	2 year
<input checked="" type="checkbox"/>	TEST PROGRAM	e3 20181212a (V9)	AUDIX	-	-	-

APPENDIX B

PERFORMANCE CRITERIA

Performance criterion A:

The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

Performance criterion B:

After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test. If the minimum performance level (or the permissible performance loss) is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as untended.



Performance criterion C:

Loss of function is allowed, provided the function is self-recoverable or can be restored by the operating of the controls by the user In accordance with the manufacturer's instructions. Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.


APPENDIX C

PHOTOGRAPHS



Conducted emissions / REC mode (Adapter)

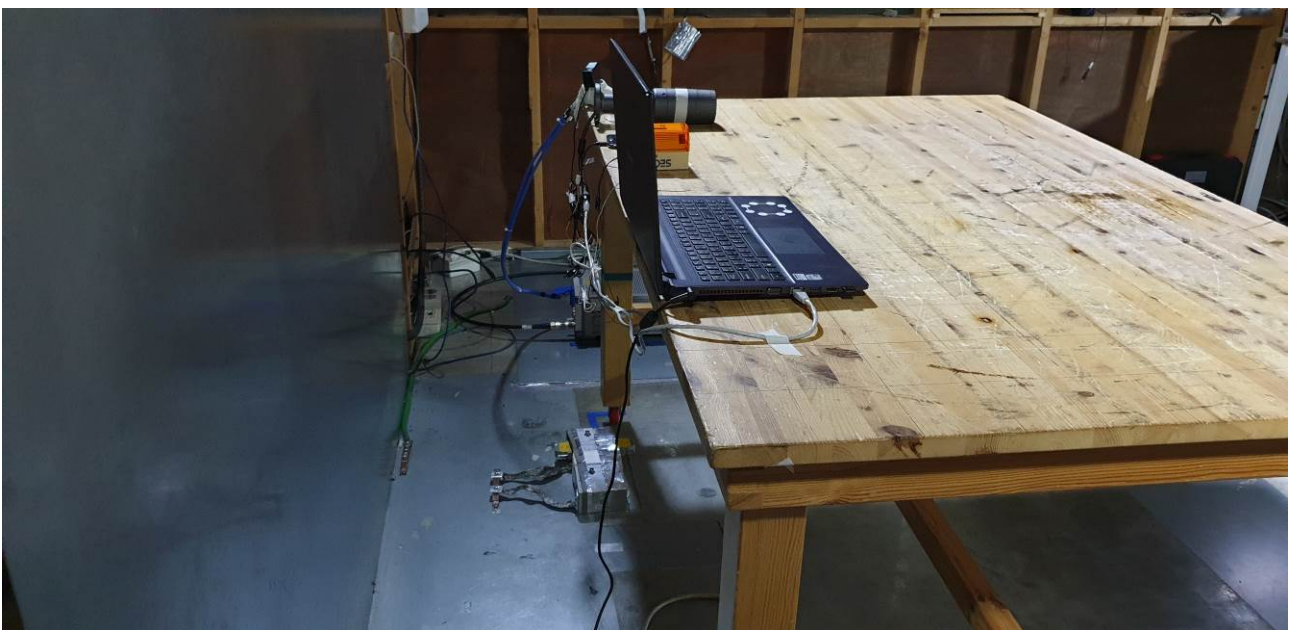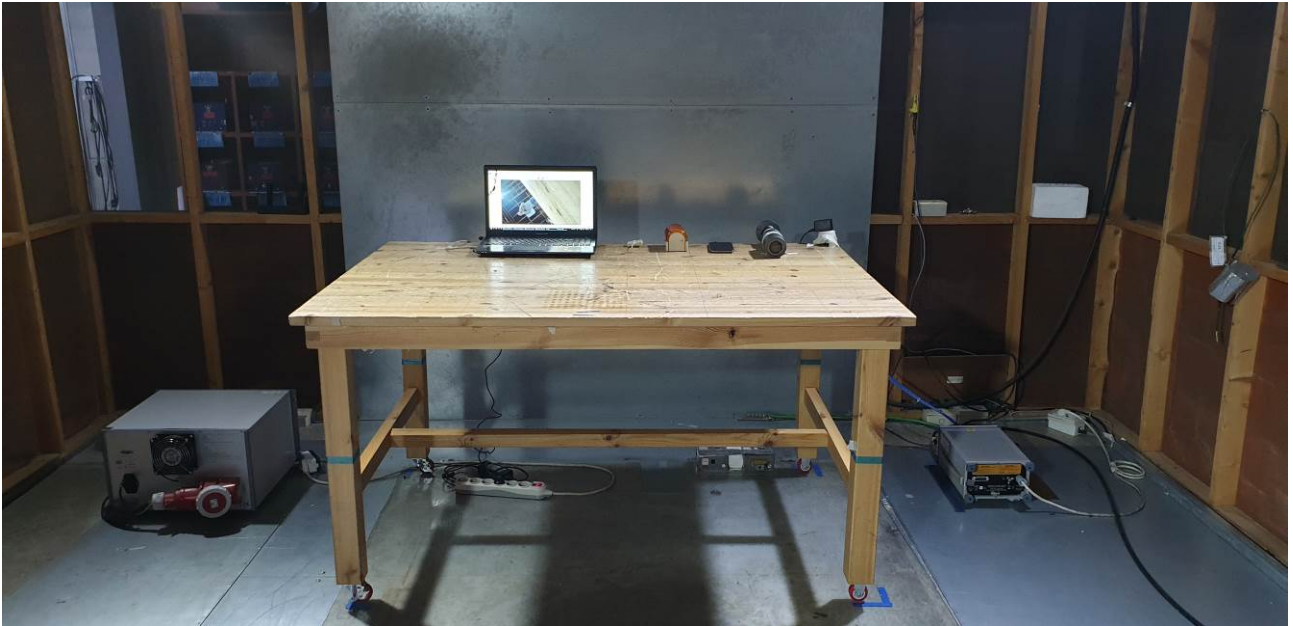



Conducted emissions (TEL) / REC mode (Adapter)

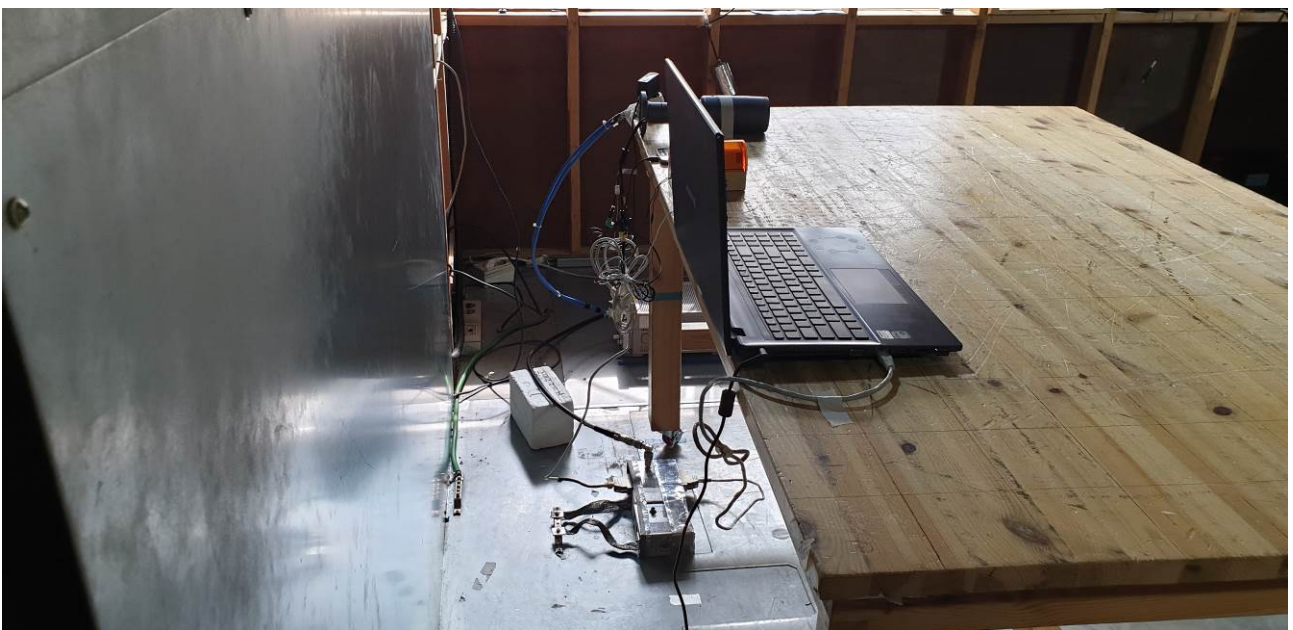



Conducted emissions (TEL) / REC mode (POE)

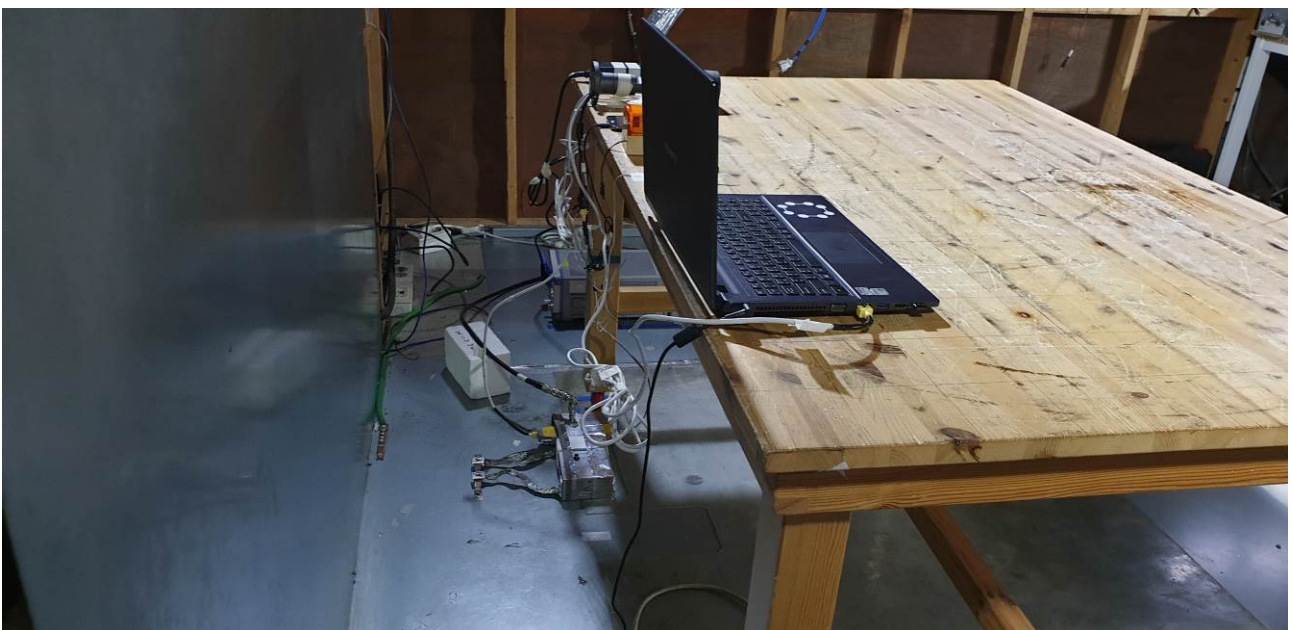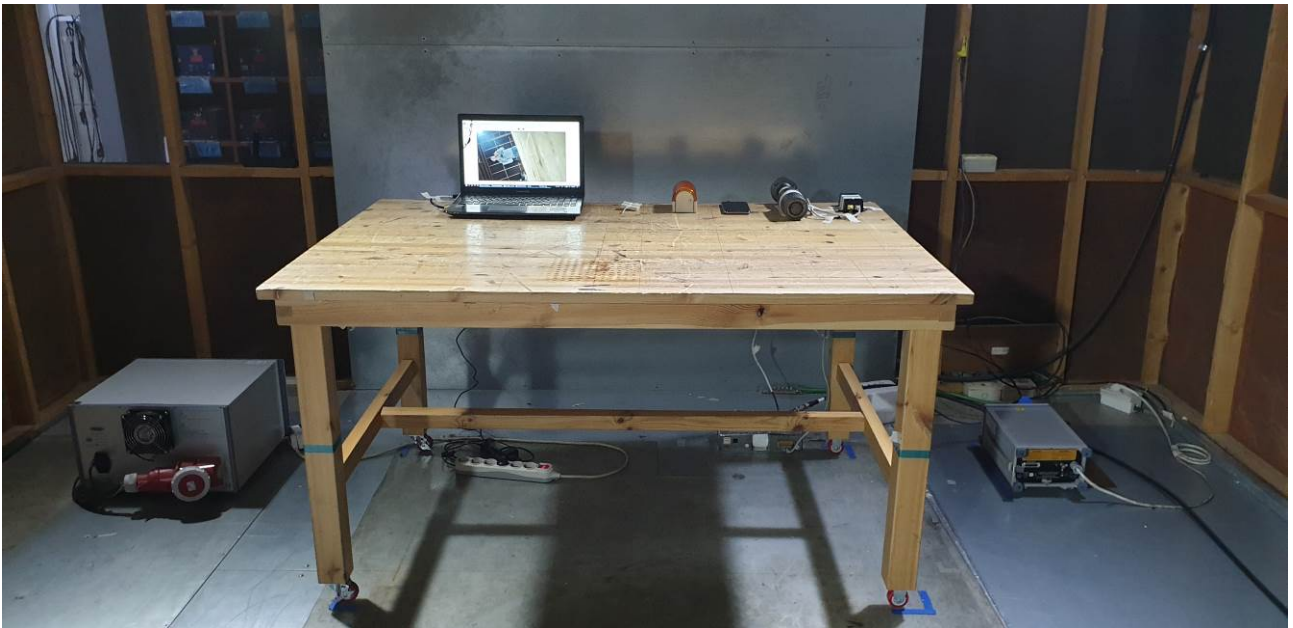



Radiated emission (Maximum emission configuration)-Below 1 GHz / REC mode (Adapter)

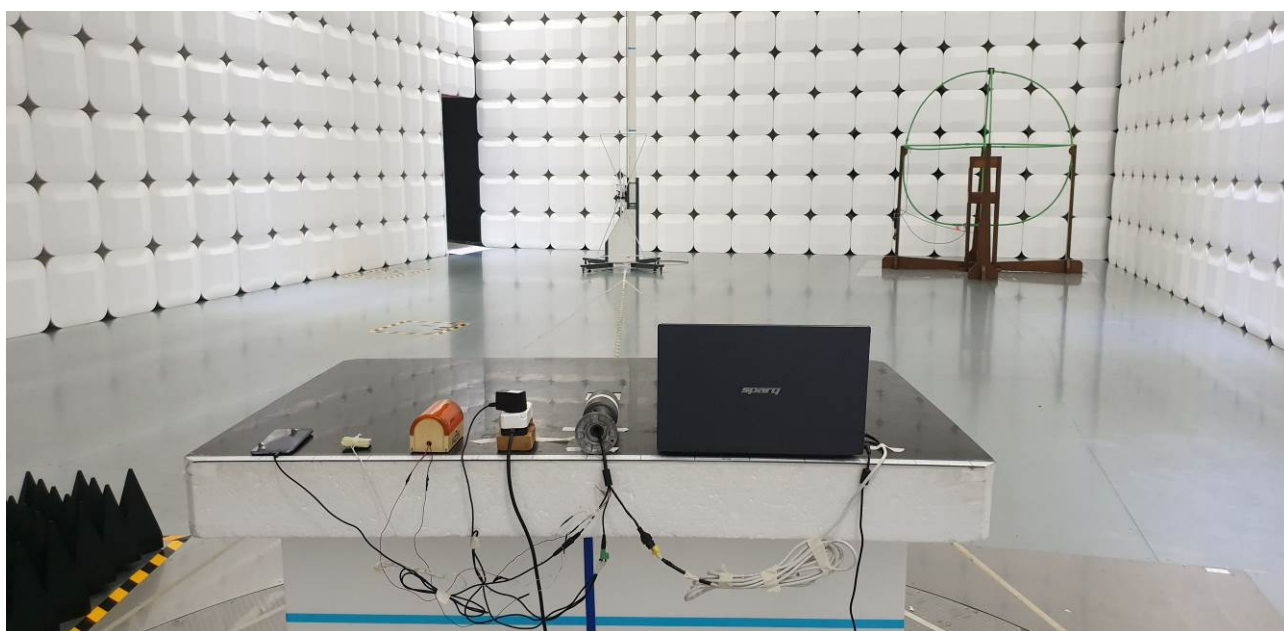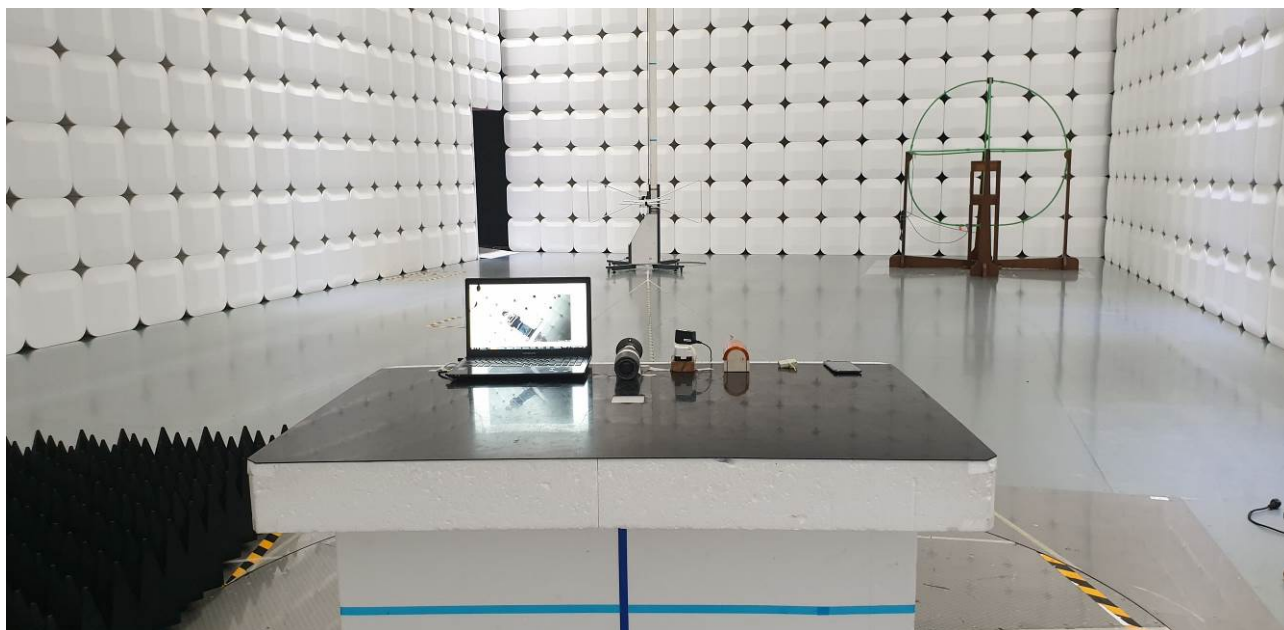



Radiated emission (Maximum emission configuration)-Below 1 GHz / REC mode (POE)

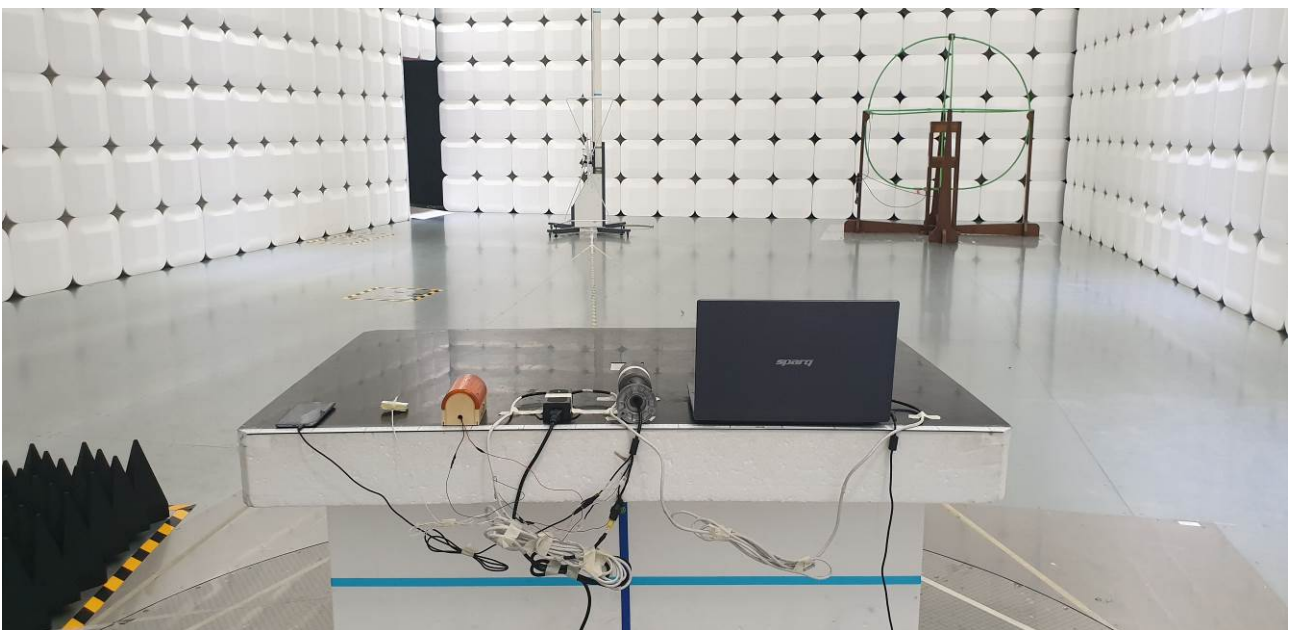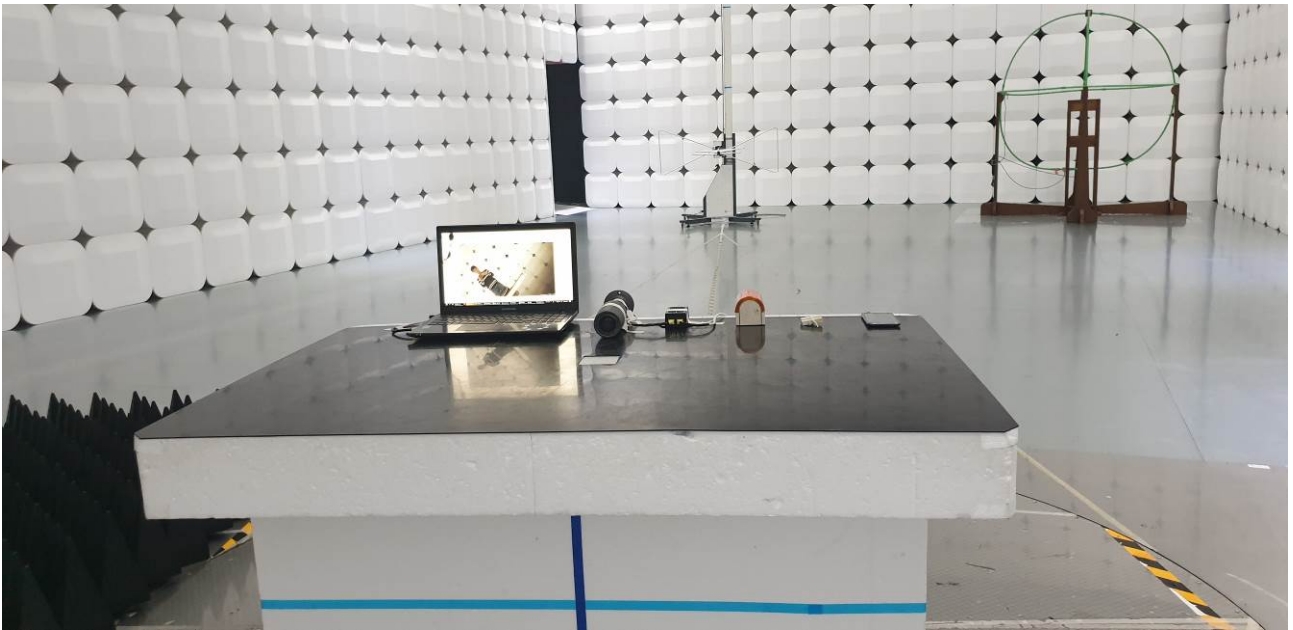

Radiated emission (Maximum emission configuration)-Above 1 GHz / REC mode (Adapter)

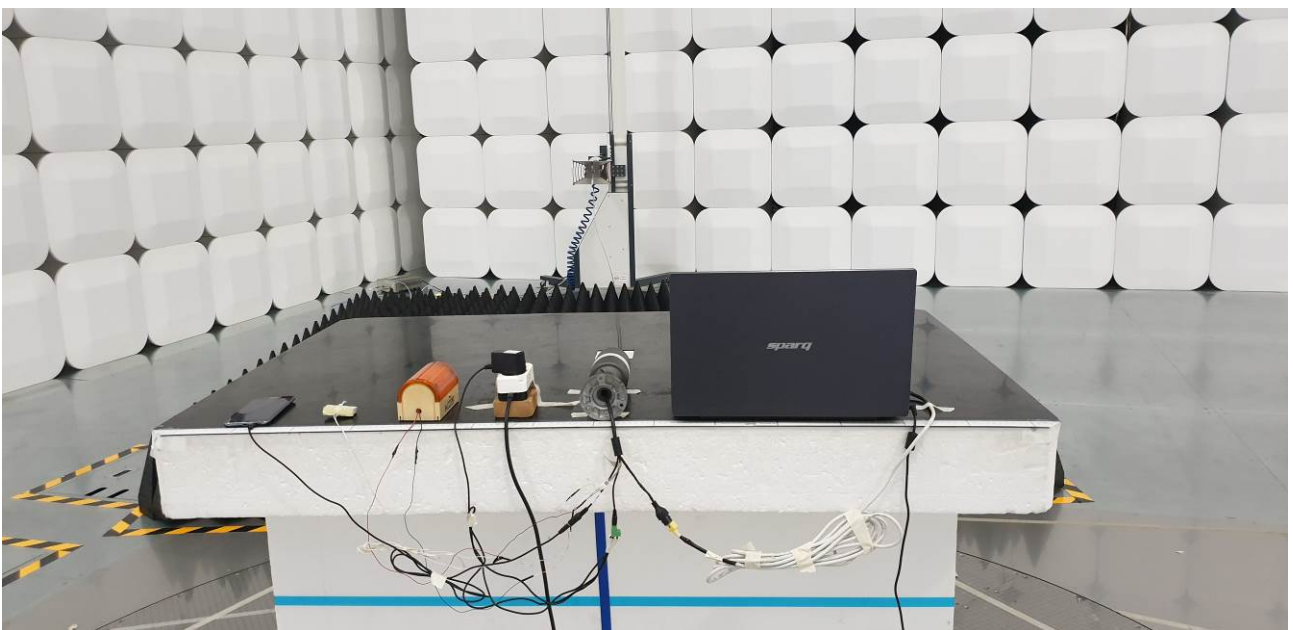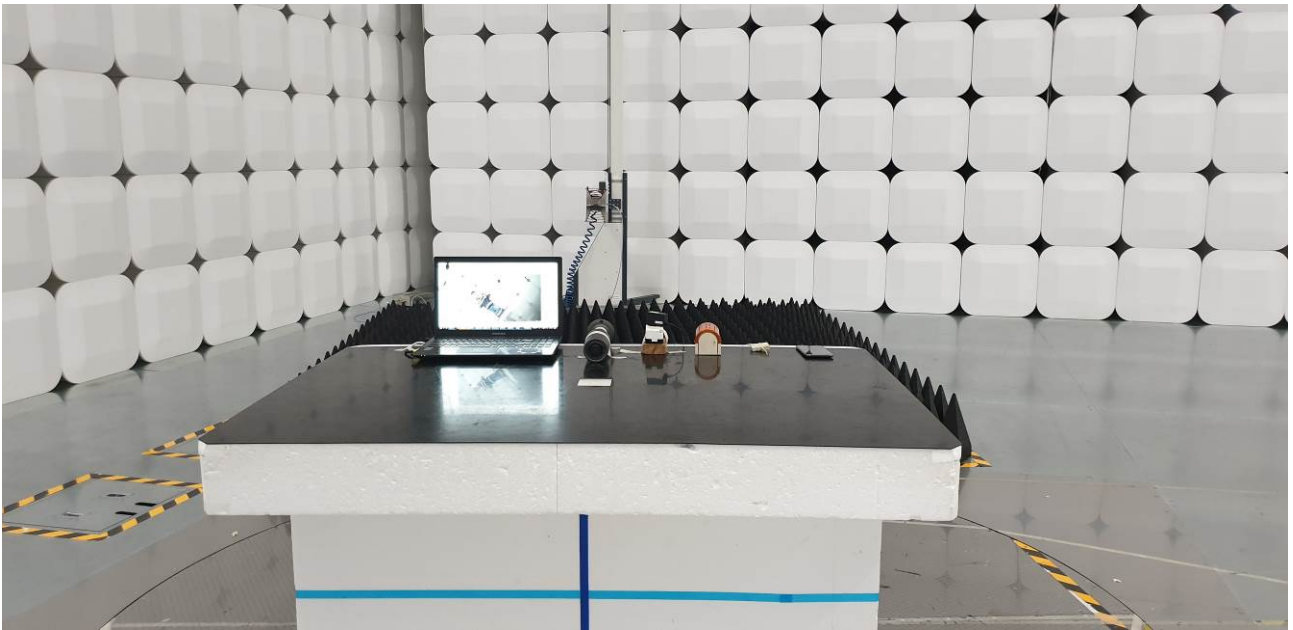

Radiated emission (Maximum emission configuration)-Above 1 GHz / REC mode (POE)

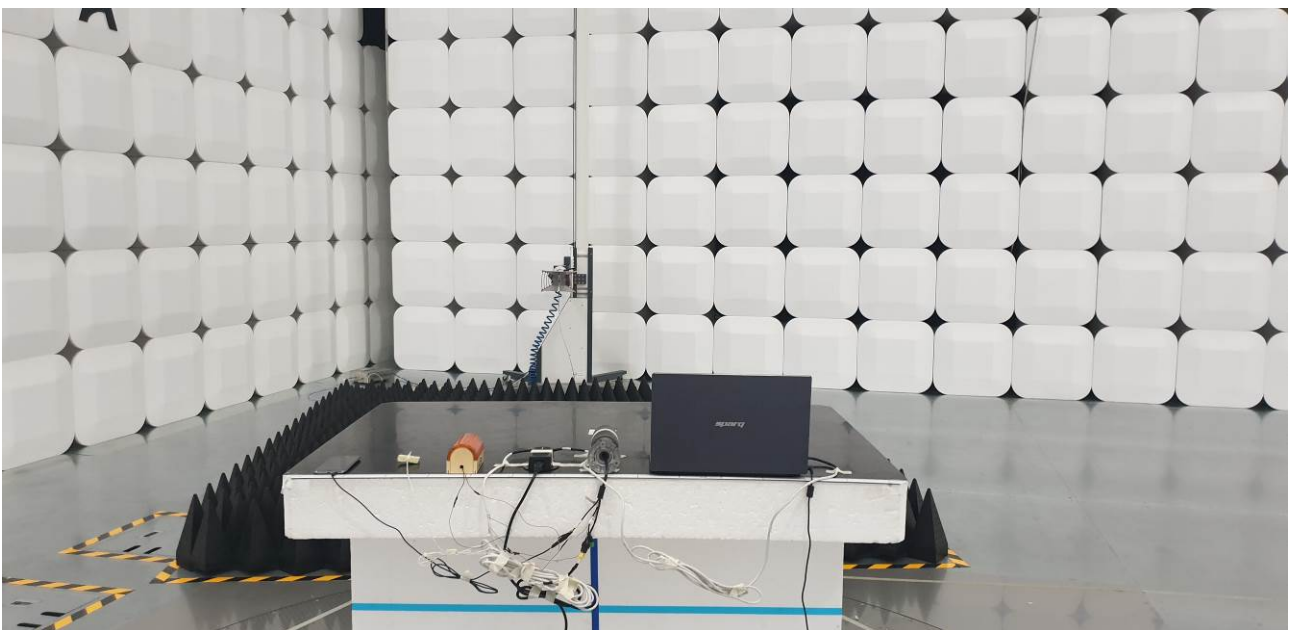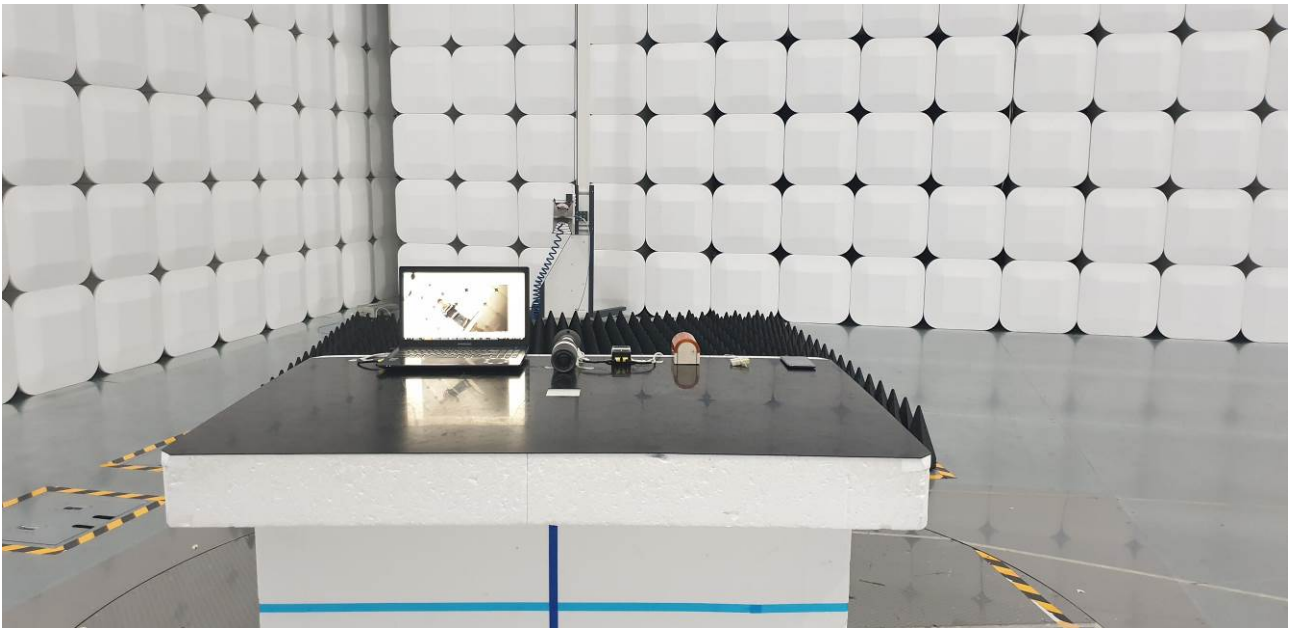

EUT



EUT

