



TEST REPORT

KCTL Inc.

52-20, Sinjeong-ro 41 beon-gil, Giheung-gu,
Yongin-si, Gyeonggi-do 446-599, Korea
Tel : 82-31-326-6700 Fax : 82-505-299-8311
www.kctl.co.kr

Report No.:
KR18-YYP0216

Page (1) of (14)

KCTL

1. Client

- Name : Hanwha Techwin Co.,Ltd
- Address : 1204, Changwon-daero, Seongsan-gu, Changwon-si,
Gyeongsangnam-do, Korea
- Date of Receipt : 2016-06-13

2. Use of Report : For Quality evaluation

3. Name of Product and Model : Network Camera / QNO-7080R*(*N:NTSC / P:PAL)

4. Manufacturer and Country of Origin : Hanwha Techwin Co.,Ltd / Korea

5. Date of Test : 2016-06-16 to 2016-06-20

6. Test method used : IEC 60529: 2013 (IP66)

7. Test Results : Refer to the test result in the test report

Affirmation	Tested by	Technical Manager
	Name: Youngmin Jang (Signature)	Name : Dohong Choi (Signature)

2018-05-09

KCTL Inc.

As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by KCTL Inc.

REPORT REVISION HISTORY

Date	Revision	Page No
2016-06-24	Originally issued	-
2018-05-09	Add Derivation model	4

This report shall not be reproduced except in full, without the written approval of KCTL Inc. This document may be altered or revised by KCTL Inc. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KCTL Inc. will constitute fraud and shall nullify the document.

- INDEX -

1. Test Laboratory	4
1.1 General.....	4
1.2 Certificate of Designated Testing Laboratory	4
2. Product (EUT)	4
2.1 Specification	4
2.2 Product Photograph	5
3. Test Method and Result	6
3.1 Protection against access to hazardous parts (IP6X).....	6
3.2 Protection against solid foreign objects test (IP6X)	8
3.3 Protection against water test (IPX6)	12

KCTL

1. Test Laboratory

1.1 General

Name of Test Laboratory	KCTL INC.
Address	52-20, Sinjeong-ro 41 beon-gil, Giheung-gu, Yongin-si, Gyeonggi-do 446-599, Korea
TEL	82 31-326-6700
FAX	82 505-299-8311
Home page	www.kctl.co.kr

1.2 Certificate of Designated Testing Laboratory

Mark.	Registration No.
NRRA	KR0040
KOLAS	No. KT231
IEC(CB-Scheme)	TL512
TUV-SUD	CARAT 15 08 93040 001
VCCI Council	R-3327, C-3706, T-1849, G-198
DSP Research, Inc.	G039
FCC	Test Firm Registration No. 687132
INDUSTRY CANADA	Company Address Code: 8035A

2. Product (EUT)

2.1 Specification

Division	Specification
Product Name	Network Camera
Model Name	QNO-7080R*(*N:NTSC / P:PAL)
Series Model Name	QNO-7081R

- Basic model and series model have equal hardware.
- A test performed with basic model QNO-7080R*(*N:NTSC / P:PAL).

KCTL Inc.

52-20, Sinjeong-ro 41 beon-gil, Giheung-gu,
Yongin-si, Gyeonggi-do 446-599, Korea
Tel : 82-31-326-6700 Fax : 82-505-299-8311
www.kctl.co.kr

Report No.:
KR18-YYP0216

Page (5) of (14)

KCTL

2.2 Product Photograph



[Product Photograph 01]



[Product Photograph 02]

3. Test Method and Result

3.1 Protection against access to hazardous parts (IP6X)

3.1.1 Test Equipment

Instrument description	Model	Manufacturer	Serial number	Due Cal
Test Probe D	None	CERTIS	None	2018-01-15
Push Pull Guage	AP-20	ATTONIC	21888	2017-03-17

3.1.2 Date of test / Environment of test

- 1) 2016-06-20
- 2) Temperature (25 ± 10) °C, Humidity (50 ± 25) % R.H., Air pressure (96 ± 10) kPa

3.1.3 Test Conditions

Item	Description
First characteristic numeral	IP6X (Protected against access to hazardous parts with a wire)
Definition	The access probe of 1.0 mm ø shall not penetrate
Test condition	1. Access probe: 1.0 mm ø, 100 mm length 2. Test force: 1 N ± 10 %
Test location	All of the outside openings

3.1.4 Test Method

- 1) Insert or push the access probe through gap of outward with specified force.

3.1.5 Test Result

Check List	Test Result
Protected against access to hazardous parts with a wire	No abnormal was found

KCTL Inc.

52-20, Sinjeong-ro 41 beon-gil, Giheung-gu,
Yongin-si, Gyeonggi-do 446-599, Korea
Tel : 82-31-326-6700 Fax : 82-505-299-8311
www.kctl.co.kr

Report No.:
KR18-YYP0216
Page (7) of (14)

KCTL

3.1.6 Test Photograph



[During the test]

3.2 Protection against solid foreign objects test (IP6X)

3.2.1 Test Equipment

Instrument description	Model	Manufacturer	Serial number	Due Cal
Dust Chamber	JFMD-002	JFM	20160201	N/A
Vacuum gauge	(-0.1~0) MPa	M.S	N/A	2017-02-19
STOP WATCH	HS-3	CASIO	510Q07	2017-12-01

3.2.2 Date of test / Environment of test

- 1) 2016-06-17
- 2) Temperature (25 ± 10) °C, Humidity (50 ± 25) % R.H., Air pressure (96 ± 10) kPa

3.2.3 Test Conditions

Item	Description
First characteristic numeral	IP6X (Dust-tight)
Definition	No ingress of dust
Enclosures	Category 1
Test condition	The talcum powder used shall be able to pass through a square-meshed sieve the nominal wire diameter of which is 50 µm and the nominal width of a gap between wires 75 µm. The amount of talcum powder to be used is 2 kg per cubic meter of the test chamber volume
Test time	8 h

3.2.4 Test Method

- 1) The enclosure under test is supported inside the test chamber and the pressure inside the enclosure is maintained below the surrounding atmospheric pressure by a vacuum pump.
- 2) The suction connection shall be made to a hole specially provided for this test.
- 3) The object of the test is to draw into the enclosure, by means of depression, a volume of air 80 times the volume of the sample enclosure tested without exceeding the extraction rate of 60 volumes per hour. In no event shall the depression exceed 2 kPa (20 mbar) on the manometer.
- 4) If an extraction rate of 40 to 60 volumes per hour is obtained the duration of the test is 2 h.
- 5) If, with a maximum depression of 2 kPa (20 mbar), the extraction rate is less than 40 volumes per hour, the test is continued until 80 volumes have been drawn through, or a period of 8 h has elapsed.

3.2.5 Test Result

Check List	Test Result
No ingress of dust	No abnormal was found

KCTL

KCTL Inc.

52-20, Sinjeong-ro 41 beon-gil, Giheung-gu,
Yongin-si, Gyeonggi-do 446-599, Korea
Tel : 82-31-326-6700 Fax : 82-505-299-8311
www.kctl.co.kr

Report No.:
KR18-YYP0216


Page (10) of (14)

KCTL

3.2.6 Test Photograph



[During the test]

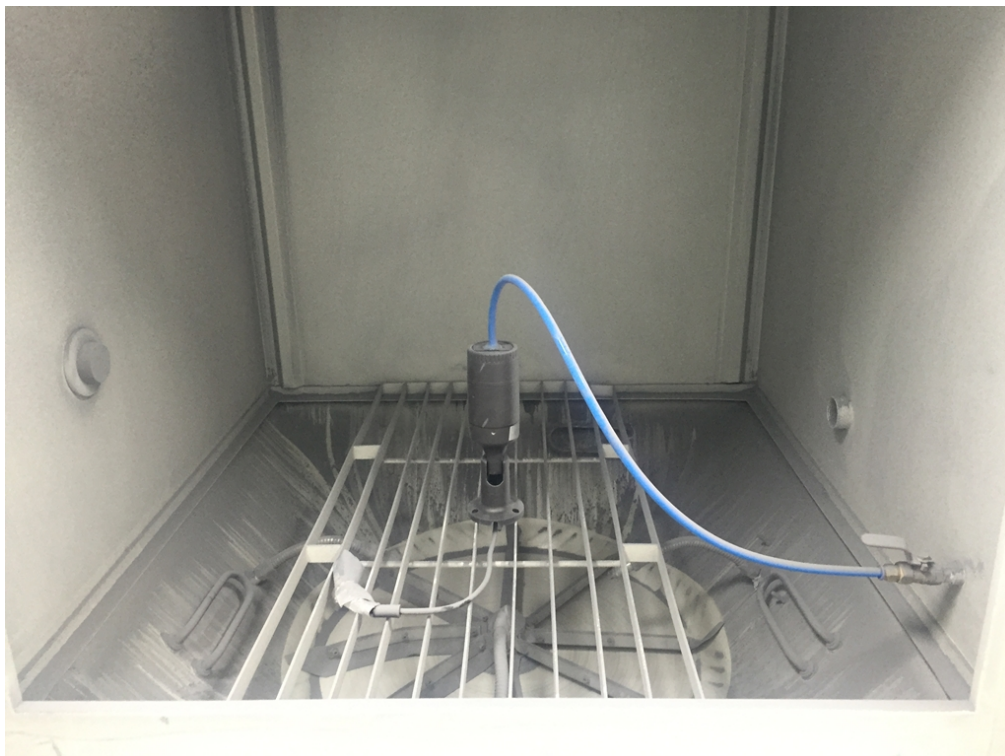

[After the test]

KCTL Inc.

52-20, Sinjeong-ro 41 beon-gil, Giheung-gu,
Yongin-si, Gyeonggi-do 446-599, Korea
Tel : 82-31-326-6700 Fax : 82-505-299-8311
www.kctl.co.kr

Report No.:
KR18-YYP0216

Page (11) of (14)

KCTL

3.2.7 Test Result Photograph



[Test result confirmation 01]



[Test result confirmation 02]

3.3 Protection against water test (IPX6)

3.3.1 Test Equipment

Instrument description	Model	Manufacturer	Serial number	Due Cal
Flow Meter	F-1000-RT	BLUE-WHITE	01	2017-03-02
Spray Nozzle for IPX6	IP06-N	ELEX POLYTECH	0160054	2017-03-17
Measuring Tape	3.5m	KOMELON	-	2018-07-07
STOP WATCH	HS-3	CASIO	510Q07	2017-12-01

3.3.2 Date of test / Environment of test:

- 1) 2016-06-16
- 2) Temperature (25 ± 10) °C, Humidity (50 ± 25) % R.H., Air pressure (96 ± 10) kPa

3.3.3 Test Conditions

Item	Description
Second characteristic numeral	IPX6 (Protected against powerful water jets)
Definition	Water projected in powerful jets against the enclosure from any direction shall have no harmful effects.
Test condition	1. Water jet hose nozzle Figure 6, Nozzle 12.5 mm diameter 2. Water flow rate: 12.5 l/min ± 5 % 3. Distance: 2.5 to 3.0 m
Definition	Water projected in jets against the enclosure from any direction shall have no harmful effects
Test time	1 min/m ² , at least 3 min

3.3.4 Test Method

- 1) The tests associated with second characteristic numeral are conducted with fresh water.
- 2) The water pressure is adjusted to give the specified waterproof rate.
- 3) The test is made by spraying the enclosure from all practicable directions with a standard test nozzle.

3.3.5 Test Result

Check List	Test Result
Protected against powerful water jets	No abnormal was found

KCTL Inc.

52-20, Sinjeong-ro 41 beon-gil, Giheung-gu,
Yongin-si, Gyeonggi-do 446-599, Korea
Tel : 82-31-326-6700 Fax : 82-505-299-8311
www.kctl.co.kr

Report No.:
KR18-YYP0216

Page (13) of (14)

KCTL

3.3.6 Test Photograph



[During the test_Water flow rate]



[During the test]

KCTL Inc.

52-20, Sinjeong-ro 41 beon-gil, Giheung-gu,
Yongin-si, Gyeonggi-do 446-599, Korea
Tel : 82-31-326-6700 Fax : 82-505-299-8311
www.kctl.co.kr

Report No.:
KR18-YYP0216


Page (14) of (14)

KCTL

3.3.7 Test Result Photograph



[Test result confirmation 01]

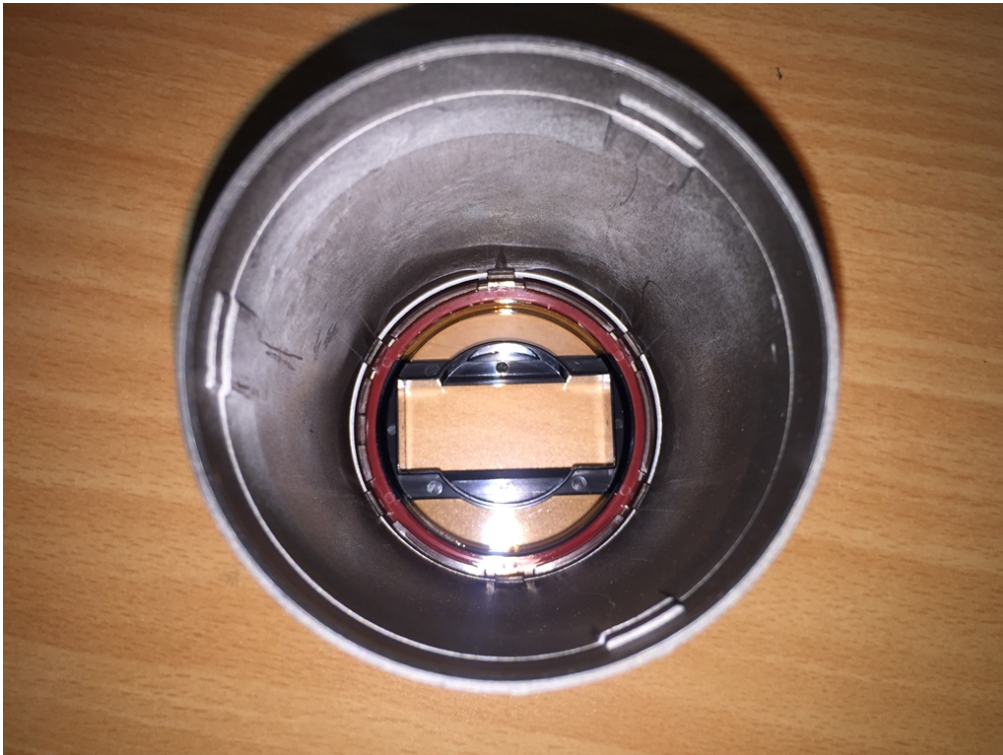

[Test result confirmation 02]