



4, Songju-ro 236beon-gil, Yangji-myeon, Cheoin-gu, Yongin-si, Gyeonggi-do,
17159, Korea

Tel: +82-31-323-6008 Fax: +82-31-323-6010

<http://www.ltalab.com>

EMC TEST REPORT

Dates of Tests: April 22 - 24, 2019

Test Report S/N: LR500122303G

Test Site : LTA Co., Ltd.

Model No.

QND-6082R

APPLICANT

Hanwha Vision Co., Ltd

Equipment Name : NETWORK CAMERA
 Manufacturer : Hanwha Vision Co., Ltd
 Model name : QND-6082R
 Additional Model name : QND-6072R, QND-6072R1, QND-6082R1
 Test Device Serial No.: Identification
 Rule Part(s) : AS/NZS CISPR 32:2015
 CISPR 32 Ed2.0

Date of issue : March 08, 2023

This test report is issued under the authority of:

The test was supervised by:

Young Kyu Shin, Technical Manager

Jong chae Kim, Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This test report is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.



Revision	Date of issue	Test report No.	Description
0	29.04.2019	LR500121904BN	Initial
1	10.08.2021	LR500122108M	Delete China Factory, Add Additional Models (QND-6072R1, QND-6082R1)
2	08.03.2023	LR500122303G	Change company name and manufacturer name

TABLE OF CONTENTS

1. General information’s4

2. Information’s about test item5

3. Test Report8

 3.1 Summary of tests8

 3.2.1 Conducted emissions9

 3.2.2 Radiated Emission15

APPENDIX A TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS.....23

APPENDIX B PERFORMANCE CRITERIA25

APPENDIX C PHOTOGRAPHS27

1. General information's

1-1 Test Performed

Company name : **LTA Co., Ltd**
 Address : 4, Songju-ro 236beon-gil, Yangji-myeon, Cheoin-gu, Yongin-si, Gyeonggi-do, 17159, Korea
 Web site : <http://www.ltalab.com>
 E-mail : chahn@ltalab.com
 Telephone : +82-31-323-6008
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	2021-09-30	ECT accredited Lab.
	KOREA		-	
RRA	U.S.A	KR0049	2023-04-08	RRA accredited Lab.
	CANADA		2022-10-18	
		C-14948	2023-09-10	
VCCI	JAPAN	T-12416	2023-09-10	VCCI registration
		R-14483	2023-10-15	
		G-10847	2021-12-13	
KOLAS	KOREA	KT551	2021-08-20	KOLAS accredited Lab.

2. Information's about test item

2-1 Client / Manufacturer

Company name : Hanwha Vision Co., Ltd
 Address : 6, Pangyo-ro 319 Beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do, 13488, KOREA
 Telephone / Facsimile : +82-70-7147-8753(<http://hanhwa-security.com>)

Factory #1

Company name : HANWHA VISION VIETNAM COMPANY LIMITED
 Address : Lot O-2, Que Vo Industrial Zone extended area, Nam Son commune, Bac Ninh city, Bac Ninh province, Vietnam

Factory #2

Company name : D-TECH CO., LTD.
 Address : 173-25, Saneop-ro, Gwonseon-gu, Suwon-si, Gyeonggi-do, Korea (Suwon Industrial Complex)

2-2 Equipment Under Test (EUT)

Class : A
 Category : NETWORK CAMERA
 Model name : QND-6082R
 Additional Model name : QND-6072R, QND-6072R1, QND-6082R1
 Additional Models are different only lens specification.
 Serial number : Identification
 Date of receipt : April 09, 2019
 EUT condition : Pre-production, not damaged
 Interface Ports : Alarm-IN, GND, Alarm-OUT, DC IN, LAN, Micro SD Card Slot
 Video OUT Port is a management Port.
 Power rating : DC 12 V (Adapter), DC 48 V (PoE)

2-3 Modification

-NONE

2-4 Test conditions

Temp. / Humid. / Pressure : (22 - 23) °C / (31 - 34) % R.H.
 Tested Model : QND-6082R
 Test mode : REC mode (DC), REC mode (PoE)
 Test Voltage : AC 240 V, 50 Hz (Adapter, PoE)

2-5 EUT

Equipment	Model No.	Serial No.	Manufacturer
NETWORK CAMERA	QND-6082R	N/A	HANWHA VISION VIETNAM COMPANY LIMITED D-TECH CO.,LTD.

2-6 Accessary / REC mode (DC)

Equipment	Model No.	Serial No.	Manufacturer
Alarm #1	N/A	N/A	N/A
Alarm #2	SPL-0030	N/A	SECOM
Notebook	81D1	PF1617TC	LENOVO
Micro SD Card (32 GB)	MB-MP32A	MBMPBG VEODFW-F	SAMSUNG
DC Adapter	F1212-120100SPAK	N/A	SHENZHEN FRECOM ELECTRONICS CO., LTD

/ REC mode (PoE)

Equipment	Model No.	Serial No.	Manufacturer
Alarm #1	N/A	N/A	N/A
Alarm #2	SPL-0030	N/A	SECOM
Notebook	81D1	PF1617TC	LENOVO
Micro SD Card (32 GB)	MB-MP32A	MBMPBG VEODFW-F	SAMSUNG
PoE Injector	PSE305	N/A	N/A

2-8 Cable List / REC mode (DC)

From		To		Length (m)	Shielding	
Type	I/O Port	Type	I/O Port		Cable	backshell
EUT	Alarm-IN	Alarm #1	-	0.6	NO	Plastic
	GND	Alarm #1	-	0.7	NO	Plastic
	Alarm-OUT	Alarm #2	-	0.6	NO	Plastic
	GND	Alarm #2	-	0.7	NO	Plastic
	DC IN	DC Adapter	DC OUT	1.4	NO	Plastic
	LAN	Notebook	LAN	3.0	NO	Plastic
	Micro SD Card Slot	Micro SD Card	-	-	-	-

/ REC mode (PoE)

From		To		Length (m)	Shielding	
Type	I/O Port	Type	I/O Port		Cable	backshell
EUT	Alarm-IN	Alarm #1	-	0.6	NO	Plastic
	GND	Alarm #1	-	0.7	NO	Plastic
	Alarm-OUT	Alarm #2	-	0.6	NO	Plastic
	GND	Alarm #2	-	0.7	NO	Plastic
	LAN	PoE Injector	P+D/OUT	3.0	NO	Plastic
	Micro SD Card Slot	Micro SD Card	-	-	-	-
PoE Injector	Data/IN	Notebook	LAN	3.2	NO	Plastic
	AC IN	AC Power Source	3 Pin AC Line	0.8	NO	Plastic

3. Test Report

3.1 Summary of tests

Parameter	Applied Standard	Status
I. Emission		
Conducted Emission	AS/NZS CISPR32:2015	C
Radiated Emission	AS/NZS CISPR32:2015	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

3.2 EMISSION

3.2.1 Conducted emissions

Definition:

The test assesses the ability of the EUT to limit its internal noise from being present on the AC mains Power In/Output/Telecommunication ports.

We were performed the test according to LTA procedure LTA-QI-04.

Test method	: AS/NZS CISPR32:2015
Measurement Frequency range	: 150 kHz - 30 MHz
Measurement RBW	: 9 kHz
Test mode	: REC mode (DC), REC mode (Adapter)
Result	: Complies

Measurement Data:

- Refer to the Next page (Maximum emission configuration)

A sample calculation:

COR. F (correction factor)= LISN Insertion loss + Cable loss + Pulse Limiter Factor

Emission Level= meter reading + COR.F

Limits for conducted disturbance at the mains ports of class A ITE

Frequency Range	Quasi-peak	Average
(0.15 - 0.5) MHz	79 dBuV	66 dBuV
(0.5 – 30) MHz	73 dBuV	60 dBuV

Note: The limits will decrease with the frequency logarithmically within 0.15MHz to 0.5MHz

Limits for conducted disturbance at the mains ports of class B ITE

Frequency Range	Quasi-peak	Average
(0.15 – 0.5) MHz	(66 – 56) dBuV	(56 - 46) dBuV
(0.5 – 5) MHz	56 dBuV	46 dBuV
(5 – 30) MHz	60 dBuV	50 dBuV

Note: The limits will decrease with the frequency logarithmically within 0.15 MHz to 0.5 MHz

Limits of conducted common mode (asymmetric mode) disturbance at telecommunication ports in the frequency range 0.15 MHz to 30 MHz for class A equipment

Frequency Range	Voltage limits		Current limits	
	Quasi-peak	Average	Quasi-peak	Average
(0.15 - 0.5) MHz	(97 – 87) dBuV	(84 – 74) dBuV	(53 – 43) dBuV	(40 – 30) dBuV
(0.5 – 30) MHz	87 dBuV	74 dBuV	43 dBuV	30 dBuV

Note 1: The limits decrease linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Note 2: The current and voltage disturbance limits are derived for use with an impedance stabilization network (ISN) which presents a common mode (asymmetric mode) impedance of 150Ω to the telecommunication port under test (conversion factor is $20 \log_{10} 150/I = 44$ dB)

Limits of conducted common mode (asymmetric mode) disturbance at telecommunication ports in the frequency range 0.15 MHz to 30 MHz for class B equipment

Frequency Range	Voltage limits		Current limits	
	Quasi-peak	Average	Quasi-peak	Average
(0.15 - 0.5) MHz	(84 – 74) dBuV	(74 – 64) dBuV	(40 – 30) dBuV	(30 – 20) dBuV
(0.5 – 30) MHz	74 dBuV	64 dBuV	30 dBuV	20 dBuV

Note 1: The limits decrease linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Note 2: The current and voltage disturbance limits are derived for use with an impedance stabilization network (ISN) which presents a common mode (asymmetric mode) impedance of 150Ω to the telecommunication port under test (conversion factor is $20 \log_{10} 150/I = 44$ dB)

Conducted emissions (LINE) / REC mode (DC)



4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel: +82-31-3236008, 9
Fax: +82-31-3236010

EUT /Model No. : QND-6082R

Phase : Line


Test Mode : REC mode (DC)

Test Power : 240 / 50

Temp./ Humi. : 22°C / 34% R.H.

Test Engineer : CHOI Y H

Date: 2019-04-22

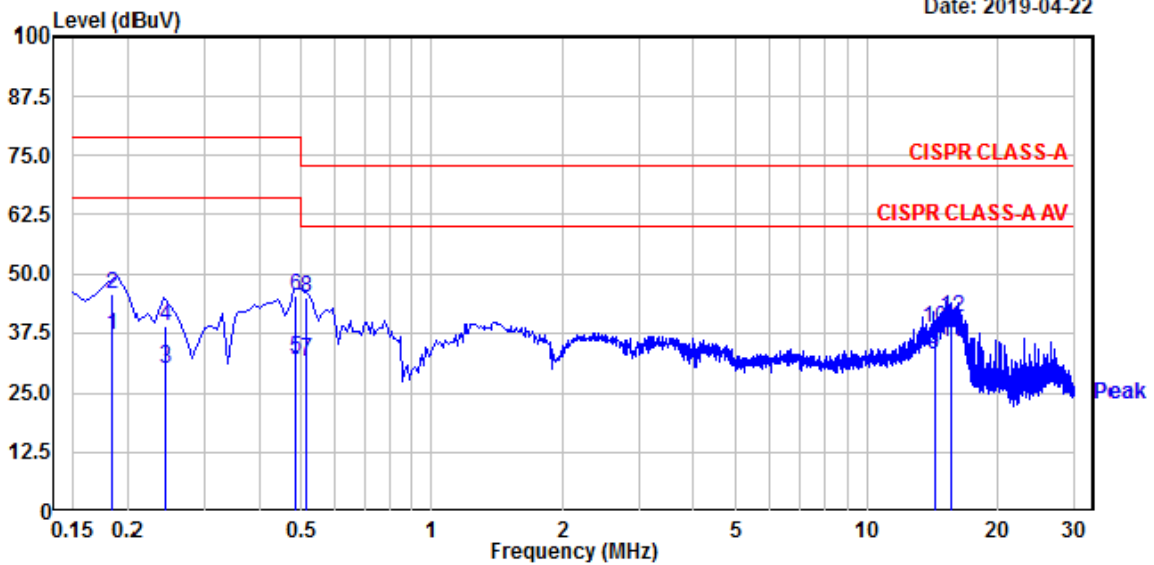

Trace: 1									
Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin
MHz	QP	AV		QP	AV	QP	AV	QP	AV
	dBuV	dBuV	dB	dBuV	dBuV	dBuV	dBuV	dB	dB
0.185	26.10	17.61	19.47	45.57	37.08	79.00	66.00	33.43	28.92
0.243	19.39	10.52	19.48	38.87	30.00	79.00	66.00	40.13	36.00
0.485	25.78	12.45	19.51	45.29	31.96	79.00	66.00	33.71	34.04
0.514	25.34	12.13	19.51	44.85	31.64	73.00	60.00	28.15	28.36
14.273	18.18	12.37	20.36	38.54	32.73	73.00	60.00	34.46	27.27
15.618	20.37	15.00	20.43	40.80	35.43	73.00	60.00	32.20	24.57

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

Conducted emissions (NEUTRAL) / REC mode (DC)



4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel: +82-31-3236008,9
Fax: +82-31-3236010

EUT /Model No. : QND-6082R

Phase : Neutral


Test Mode : REC mode (DC)

Test Power : 240 / 50

Temp./ Humi. : 22°C / 34% R.H.

Test Engineer : CHOI Y H

Date: 2019-04-22

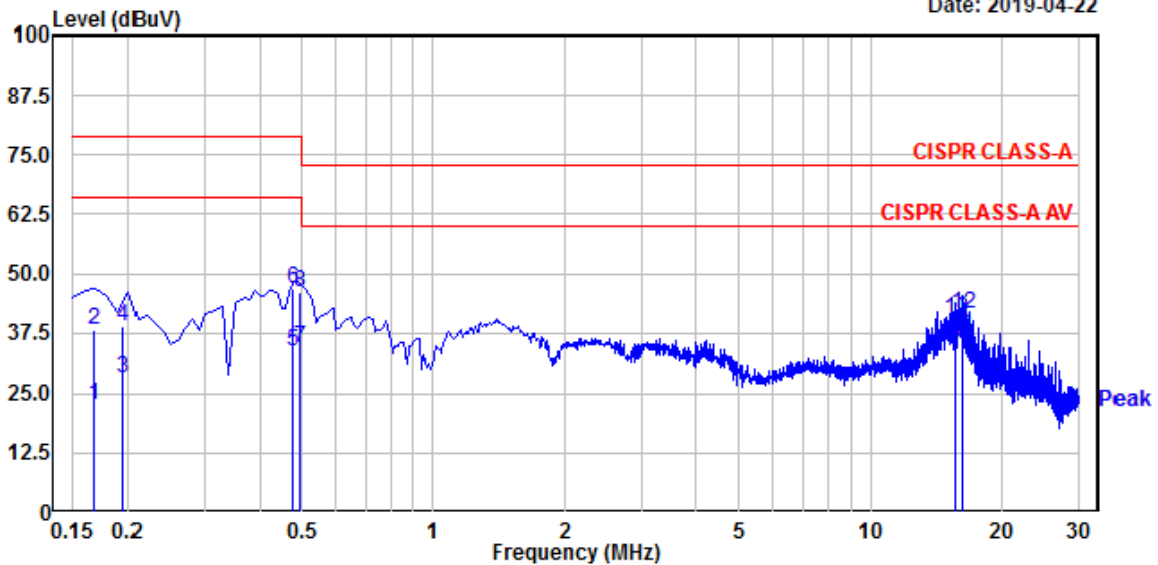

Trace: 1

Freq MHz	RD QP dBuV	RD AV dBuV	C.F dB	Result QP dBuV	Result AV dBuV	Limit QP dBuV	Limit AV dBuV	Margin QP dB	Margin AV dB
0.168	18.64	3.20	19.48	38.12	22.68	79.00	66.00	40.88	43.32
0.196	19.43	8.81	19.48	38.91	28.29	79.00	66.00	40.09	37.71
0.478	27.14	13.94	19.51	46.65	33.45	79.00	66.00	32.35	32.55
0.495	26.69	14.77	19.51	46.20	34.28	79.00	66.00	32.80	31.72
15.617	20.00	14.51	20.56	40.56	35.07	73.00	60.00	32.44	24.93
16.167	21.09	16.41	20.60	41.69	37.01	73.00	60.00	31.31	22.99

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

Conducted emissions (TEL_100 M) / REC mode (DC)



4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel: +82-31-3236008,9
Fax: +82-31-3236010

EUT /Model No. : QND-6082R


Phase : TEL_100M

Test Mode : REC mode (DC)

Test Power : 240 / 50

Temp./ Humi. : 22°C / 34% R.H.

Test Engineer : CHOI Y H

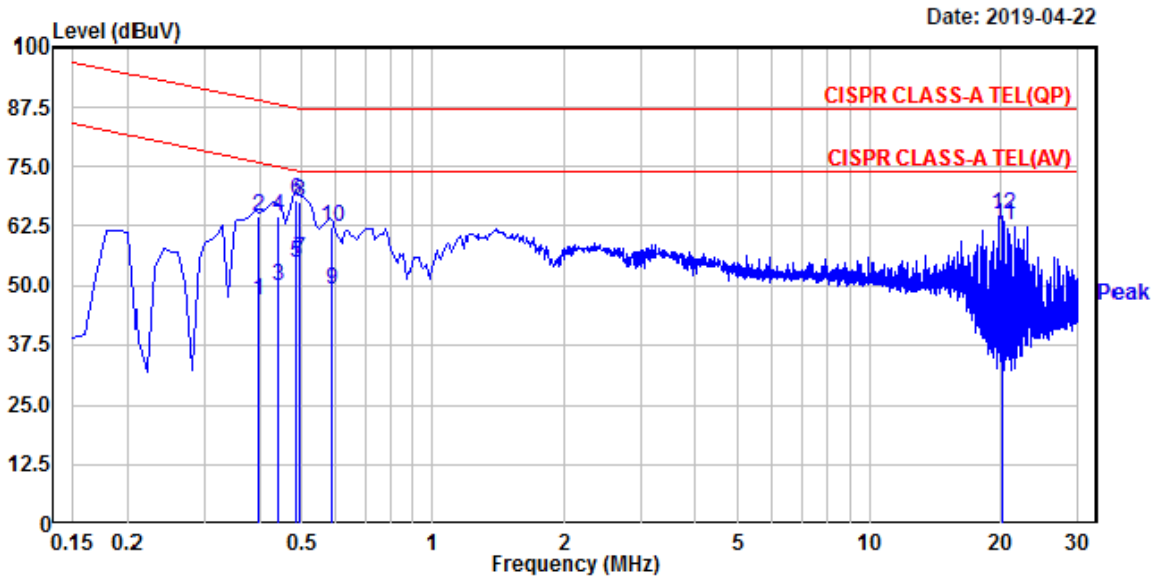

Trace: 1

Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin
MHz	QP	AV	dB	QP	AV	QP	AV	QP	AV
	dBuV	dBuV		dBuV	dBuV	dBuV	dBuV	dB	dB
0.398	45.07	27.25	19.53	64.60	46.78	88.90	75.90	24.30	29.12
0.440	45.00	30.22	19.52	64.52	49.74	88.06	75.06	23.54	25.32
0.485	48.32	35.08	19.51	67.83	54.59	87.26	74.26	19.43	19.67
0.495	47.90	35.83	19.51	67.41	55.34	87.08	74.08	19.67	18.74
0.585	42.92	29.70	19.49	62.41	49.19	87.00	74.00	24.59	24.81
20.258	44.88	42.90	19.88	64.76	62.78	87.00	74.00	22.24	11.22

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

Conducted emissions (TEL_100 M) / REC mode (PoE)



4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel:+82-31-3236008,9
Fax:+82-31-3236010

EUT /Model No. : QND-6082R

Phase : TEL_100M


Test Mode : REC mode (PoE)

Test Power : 240 / 50

Temp./ Humi. : 22°C / 34% R.H.

Test Engineer : CHOI Y H

Date: 2019-04-22

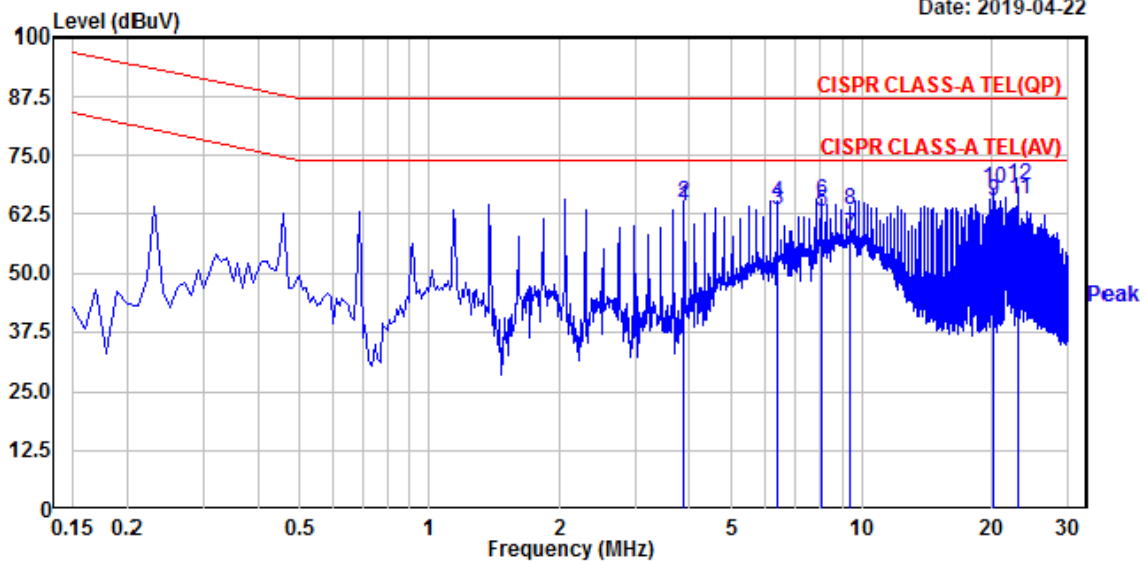

Trace: 1

Freq MHz	RD QP dBuV	RD AV dBuV	C.F dB	Result QP dBuV	Result AV dBuV	Limit QP dBuV	Limit AV dBuV	Margin QP dB	Margin AV dB
3.891	45.39	44.61	19.40	64.79	64.01	87.00	74.00	22.21	9.99
6.409	45.38	43.94	19.50	64.88	63.44	87.00	74.00	22.12	10.56
8.012	45.66	43.54	19.57	65.23	63.11	87.00	74.00	21.77	10.89
9.386	43.87	38.32	19.61	63.48	57.93	87.00	74.00	23.52	16.07
20.258	48.04	45.45	19.88	67.92	65.33	87.00	74.00	19.08	8.67
23.128	48.86	45.52	19.97	68.83	65.49	87.00	74.00	18.17	8.51

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

3.2.2 Radiated Emission

Definition:

The test assesses the ability of ancillary equipment to limit their internal noise from being radiated from the enclosure.

We were performed the test according to LTA procedure LTA-QI-04.

Test method	: AS/NZS CISPR32:2013
Measuring Distance	: 10 m for below 1 GHz
Measurement Frequency range	: 30 MHz – 1 000 MHz
Measurement RBW	: 120 kHz @ 10 m
Test mode	: REC mode (DC), REC mode (Adapter)
Result	: Complies

Measurement Data:

- Refer to the Next page (Maximum emission configuration)
- The highest internal source of an EUT is higher than 108 MHz, the measurement shall only be made up to 6 GHz.
(The highest internal source of an EUT : higher than 108 MHz)

A sample calculation:

COR. F (correction factor)= Antenna factor + Cable loss- Amp.gain- Distance correction

Emission Level= meter reading + COR.F

Limit of 10 m for below 1 GHz**CLASS A**

Frequency Range	Quasi-peak
(30 – 230) MHz	40 dBuV/m
(230 – 1 000) MHz	47 dBuV/m

CLASS B

Frequency Range	Quasi-peak
(30 – 230) MHz	30 dBuV/m
(230 – 1 000) MHz	37 dBuV/m

Limit of 3m for above 1 GHz**CLASS A**

Frequency Range	Average Limit @ 3m (dB μ V/m)	Peak limit @ 3m (dB μ V/m)
(1 000 – 3 000) MHz	56	76
(3 000 – 6 000) MHz	60	80
NOTE:	The lower limit applies at the transition frequency.	

CLASS B

Frequency Range	Average Limit @ 3m (dB μ V/m)	Peak limit @ 3m (dB μ V/m)
(1 000 – 3 000) MHz	50	70
(3 000 – 6 000) MHz	54	74
NOTE:	The lower limit applies at the transition frequency.	

Radiated Emission (Below 1 GHz) / V _ REC mode (DC)



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: QND-6082R

Temp/Humi: 23 / 31

Test Mode : REC mode(DC)

Tested by: CHOI Y H

Date: 2019-04-24

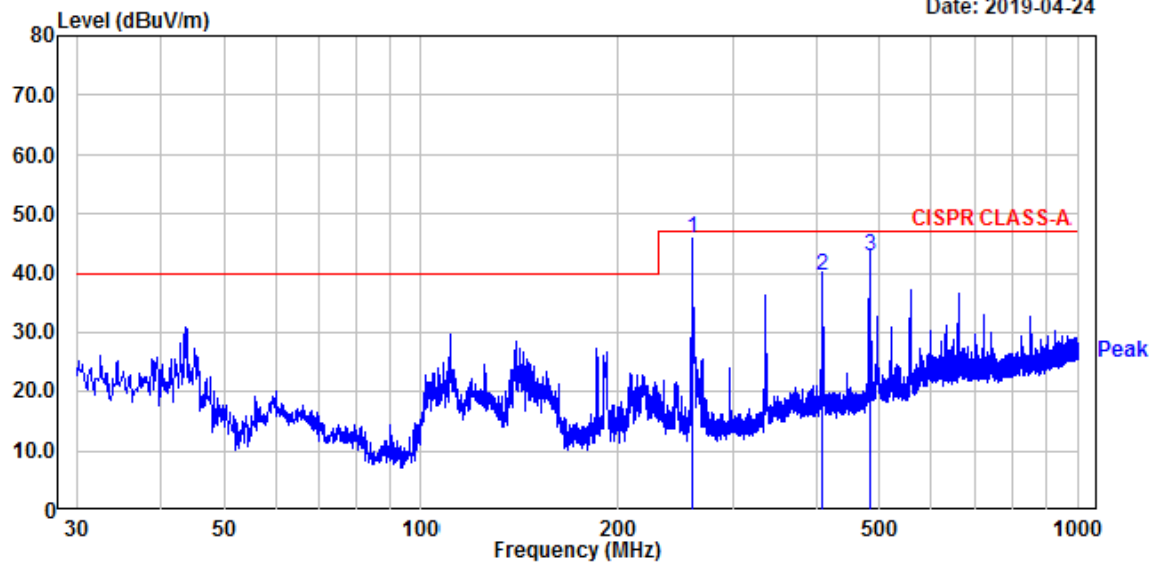

Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
MHz	dBuV	dB	QP dBuV/m	dBuV/m	dB	cm	deg	
259.89	58.39	-12.60	45.79	47.00	1.21	108	232	vertical
408.42	48.34	-8.85	39.49	47.00	7.51	121	48	vertical
482.63	50.39	-7.50	42.89	47.00	4.11	113	23	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Radiated Emission (Below 1 GHz) / H _ REC mode (DC)



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: QND-6082R

Temp/Humi: 23 / 31

Test Mode : REC mode(DC)

Tested by: CHOI Y H

Date: 2019-04-24

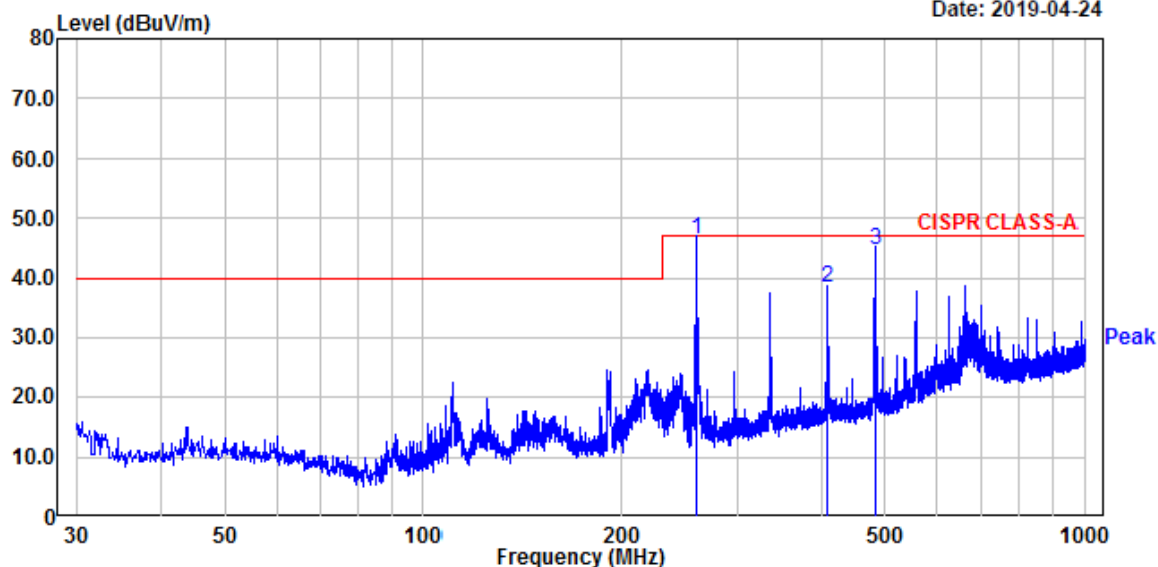

Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
MHz	dBuV	dB	QP dBuV/m	dBuV/m	dB	cm	deg	
259.89	58.99	-12.60	46.39	47.00	0.61	346	142	horizontal
408.30	47.34	-8.86	38.48	47.00	8.52	378	319	horizontal
482.63	52.19	-7.50	44.69	47.00	2.31	208	10	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Radiated Emission (Below 1 GHz) / V _ REC mode (PoE)



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: QND-6082R

Temp/Humi: 23 / 31

Test Mode : REC mode(PoE)

Tested by: CHOI Y H

Date: 2019-04-24

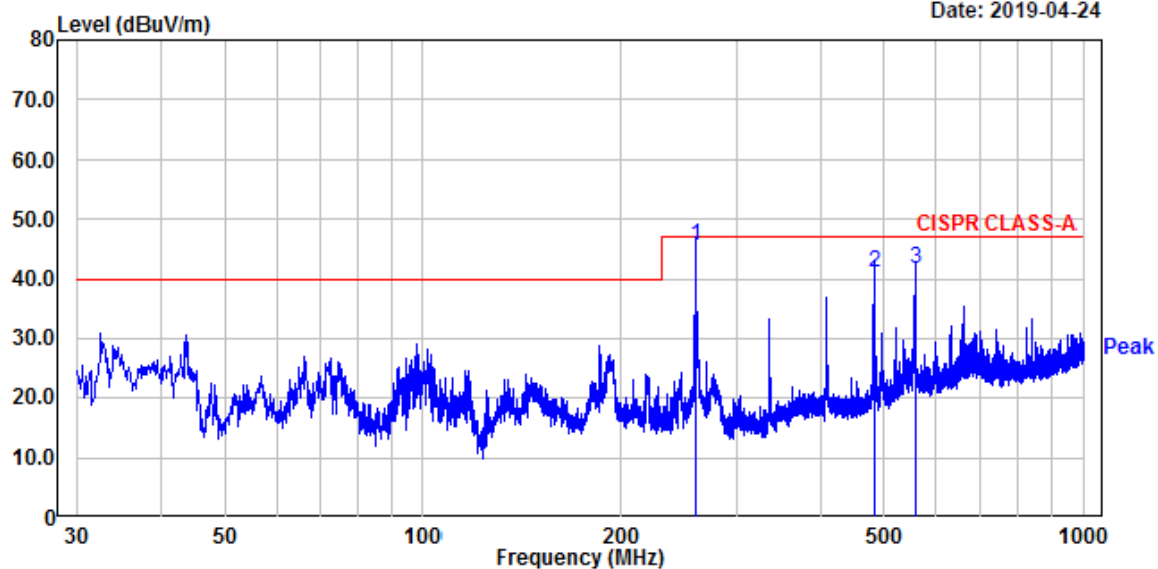

Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
MHz	dBuV	dB	QP dBuV/m	dBuV/m	dB	cm	deg	
259.89	58.29	-12.60	45.69	47.00	1.31	100	172	vertical
482.63	48.69	-7.50	41.19	47.00	5.81	100	343	vertical
556.83	48.09	-6.32	41.77	47.00	5.23	400	312	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Radiated Emission (Below 1 GHz) / H _ REC mode (PoE)




4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: QND-6082R

Temp/Humi: 23 / 31

Test Mode : REC mode(PoE)

Tested by: CHOI Y H

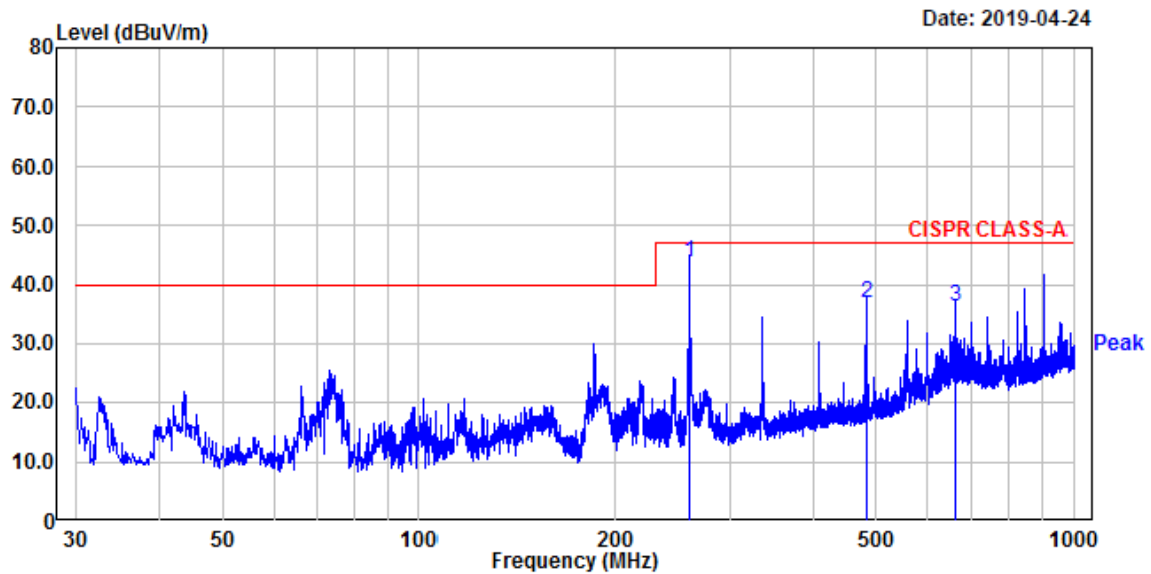

Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
MHz	dBuV	dB	QP dBuV/m	dBuV/m	dB	cm	deg	
259.89	56.29	-12.60	43.69	47.00	3.31	400	35	horizontal
482.63	44.39	-7.50	36.89	47.00	10.11	100	46	horizontal
660.14	40.09	-3.90	36.19	47.00	10.81	208	231	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Radiated Emission / REC mode (DC)


(Above 1 GHz) / H

EUT/Model No.: QND-6082R

Temp/Humi: 23 / 31

Test Mode : REC mode(DC)

Tested by: CHOI Y H

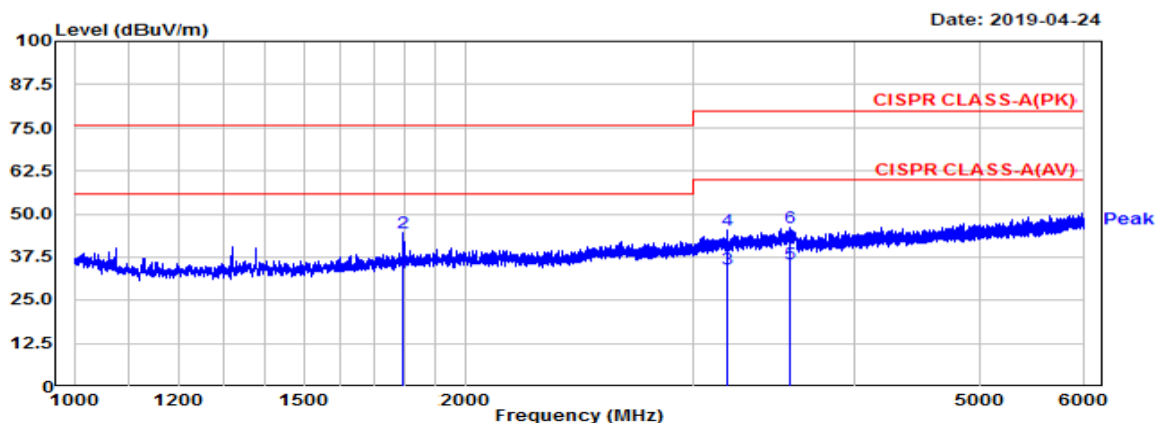


(Above 1 GHz) / V

EUT/Model No.: QND-6082R

Temp/Humi: 23 / 31

Test Mode : REC mode(DC)

Tested by: CHOI Y H

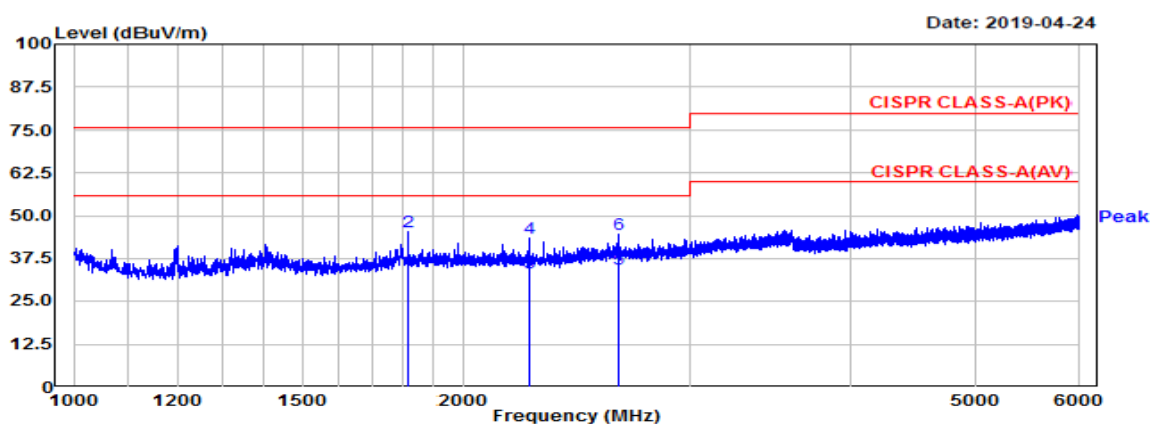

Manufacture : HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.

Test Date

Temp.:

Humidity:

Distance

Model : QND-6082R

2019-04-24

23

31

4

TEST mode : REC mode(DC)

Freq.(MHz)	Reading(PK)	Reading(AV)	C.F	Result(PK)	Result(AV)	Limit(PK)	Limit(AV)	Margin(PK)	Margin(AV)	Height	Angle	Polarity
MHz	dBuV	dBuV	dB	dBuV/m	dBuV/m	dBuV/m	dBuV/m	dB	dB	cm	deg	Hor/Ver
1791.25	49.6	37.8	-2.63	46.93	35.20	76.00	56.00	29.07	20.80	100	154	H
3193.13	41.7	30.5	5.90	47.61	36.40	80.00	60.00	32.39	23.60	100	108	H
3561.88	40.8	30.4	7.54	48.38	37.95	80.00	60.00	31.62	22.05	100	360	H
1814.38	49.1	37.7	-1.19	47.93	36.50	76.00	56.00	28.07	19.50	100	57	V
2248.13	44.7	34.6	1.28	46.03	35.88	76.00	56.00	29.97	20.12	100	1	V
2640.00	44.3	34.1	2.87	47.16	36.97	76.00	56.00	28.84	19.03	100	1	V

Radiated Emission (Above 1 GHz) / REC mode (PoE)


(Above 1 GHz) / H

EUT/Model No.: QND-6082R

Temp/Humi: 23 / 31

Test Mode : REC mode(PoE)

Tested by: CHOI Y H

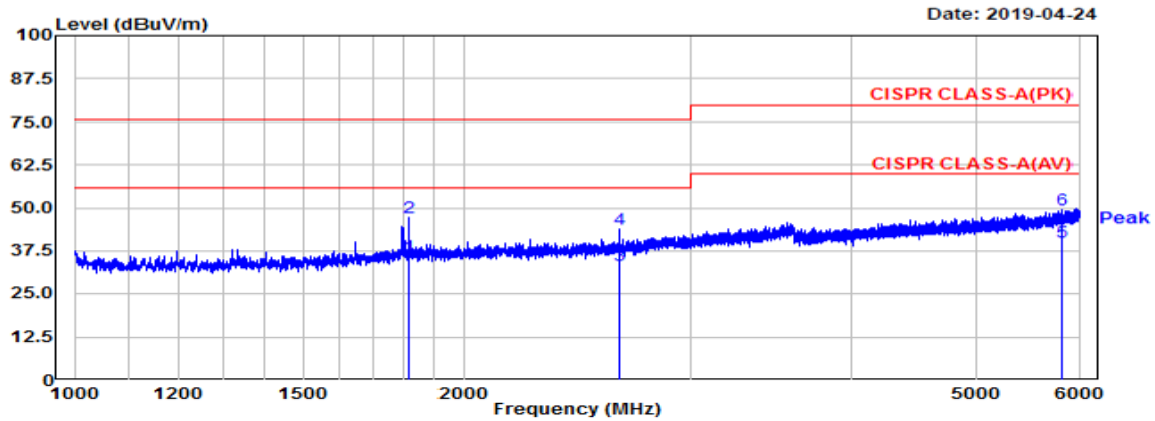


(Above 1 GHz) / V

EUT/Model No.: QND-6082R

Temp/Humi: 23 / 31

Test Mode : REC mode(PoE)

Tested by: CHOI Y H

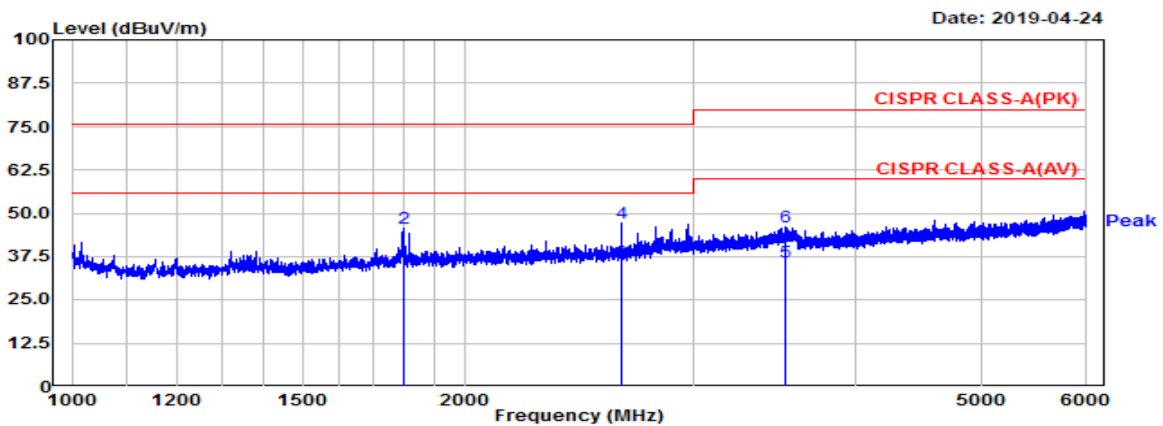

Manufacture : HANWHA TECHWIN SECURITY VIETNAM CO.,LTD.

Test Date

Temp.: Humidity: Distance

Model : QND-6082R

2019-04-24

[°C]

[%]

(m)

TEST mode : REC mode(PoE)

Freq.(MHz)	Reading(PK)	Reading(AV)	C.F	Result(PK)	Result(AV)	Limit(PK)	Limit(AV)	Margin(PK)	Margin(AV)	Height	Angle	Polarity
MHz	dBuV	dBuV	dB	dBuV/m	dBuV/m	dBuV/m	dBuV/m	dB	dB	cm	deg	Hor/Ver
1815.00	51.4	40.0	-2.27	49.11	37.77	76.00	56.00	26.89	18.23	100	276	H
2640.00	42.6	32.0	3.20	45.80	35.20	76.00	56.00	30.20	20.80	100	357	H
5833.13	35.1	25.9	16.33	51.42	42.20	80.00	60.00	28.58	17.80	100	156	H
1795.00	49.2	37.3	-1.36	47.79	35.96	76.00	56.00	28.21	20.04	100	126	V
2640.00	46.5	35.1	2.87	49.33	38.00	76.00	56.00	26.67	18.00	100	349	V
3528.13	40.5	30.5	7.68	48.14	38.14	80.00	60.00	31.86	21.86	100	314	V

APPENDIX A

TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment are identified by the Test Laboratory.

Conducted Disturbance Measurements

	Item	Model Name	Manufacturer	Serial No.	Next Cal.	Interval
<input checked="" type="checkbox"/>	EMI TEST Receiver	ESR	Rohde & Schwarz	101499	2019.07.11	1 year
<input checked="" type="checkbox"/>	Pulse Limiter	ESH3-Z2	Rohde & Schwarz	100710	2020.03.16	1 year
<input type="checkbox"/>	LISN	ESH3-Z6	Rohde & Schwarz	100378	2019.09.07	1 year
<input type="checkbox"/>	LISN	ESH3-Z6	Rohde & Schwarz	101468	2019.09.07	1 year
<input checked="" type="checkbox"/>	LISN(main)	ENV216	Rohde & Schwarz	100408	2019.10.10	1 year
<input type="checkbox"/>	LISN(sub)	LT32C/10	AFJ	32031518210	2019.09.06	1 year
<input checked="" type="checkbox"/>	TEST PROGRAM	e3_ce 20181212a (V9)	AUDIX	-	-	-
<input checked="" type="checkbox"/>	ISN	ISN T800	TESEQ	27109	2019.09.12	1 year
<input type="checkbox"/>	ISN	ENY81-CA6	Rohde & Schwarz	101565	2019.09.12	1 year
<input type="checkbox"/>	CURRENT PROBE	EZ-17	Rohde & Schwarz	100508	2019.09.06	1 year

Radiated Emission – Below 1 GHz

	Item	Model Name	Manufacturer	Serial No.	Next Cal.	Interval
<input checked="" type="checkbox"/>	EMI TEST Receiver	ESU	Rohde & Schwarz	100092	2019.09.06	1 year
<input checked="" type="checkbox"/>	Amplifier (25 dB)	8447D	HP	2944A07684	2019.09.06	1 year
<input checked="" type="checkbox"/>	BILOG Antenna	VULB9168	SCHWARZBECK	775	2020.03.16 (KOLAS)	2 year
<input checked="" type="checkbox"/>	TEST PROGRAM	e3 20181212a (V9)	AUDIX	-	-	-

Radiated Emission – Above 1 GHz

	Item	Model Name	Manufacturer	Serial No.	Next Cal.	Interval
<input checked="" type="checkbox"/>	EMI TEST Receiver	ESU	Rohde & Schwarz	100092	2019.09.06	1 year
<input checked="" type="checkbox"/>	Amplifier	8449B	HP	3008A00671	2019.09.06	1 year
<input checked="" type="checkbox"/>	HORN ANTENNA	3115	ETS	114105	2019.11.03 (KOLAS)	2 year
<input checked="" type="checkbox"/>	TEST PROGRAM	e3 20181212a (V9)	AUDIX	-	-	-

APPENDIX B

PERFORMANCE CRITERIA

Performance criterion A:

The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

Performance criterion B:

After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test. If the minimum performance level (or the permissible performance loss) is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as untended.


Performance criterion C:

Loss of function is allowed, provided the function is self-recoverable or can be restored by the operating of the controls by the user In accordance with the manufacturer's instructions. Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

APPENDIX C

PHOTOGRAPHS

Conducted emissions / REC mode (DC)

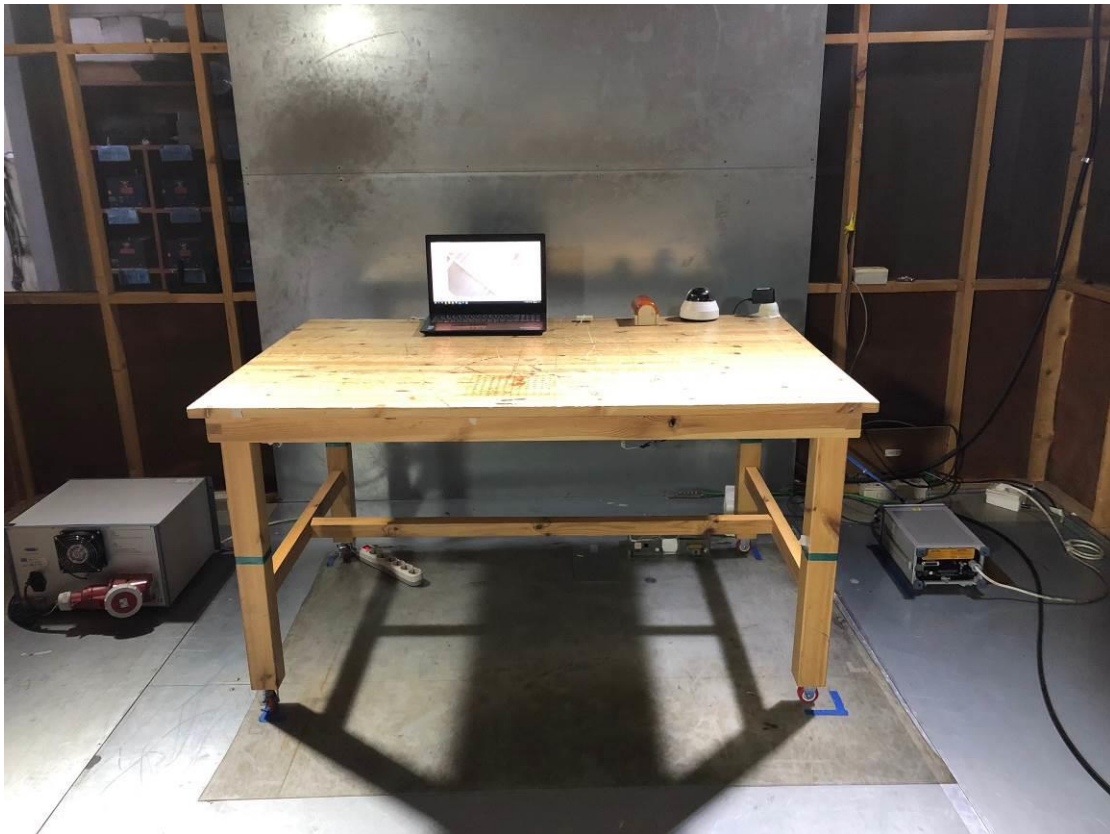



Conducted emissions (TEL) / REC mode (DC)





Conducted emissions (TEL) / REC mode (PoE)





Radiated emission (Maximum emission configuration)-Below 1 GHz / REC mode (DC)

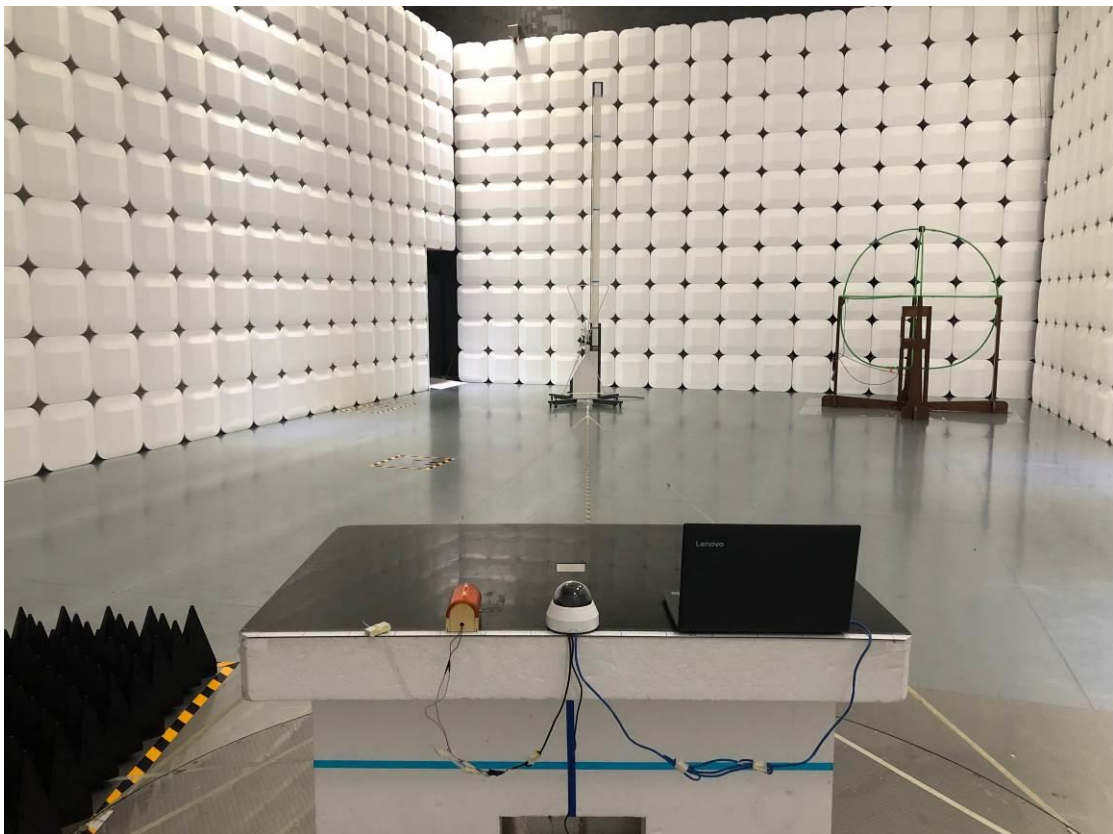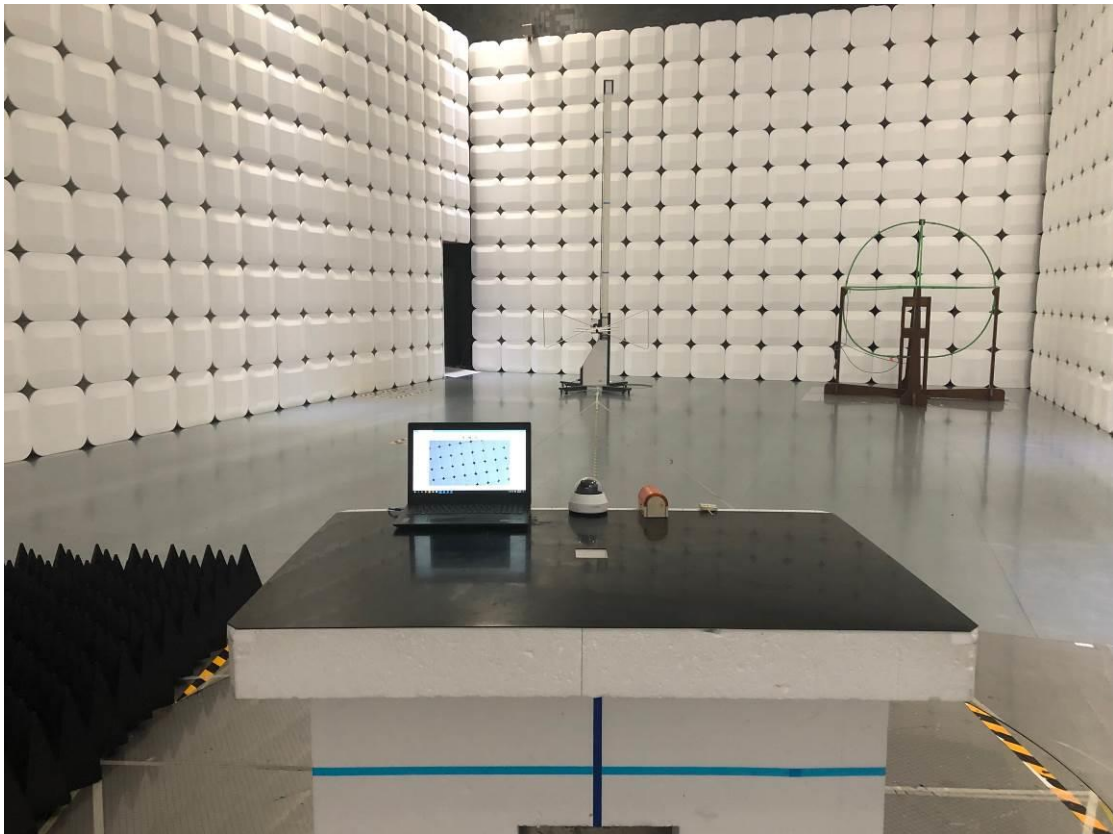



Radiated emission (Maximum emission configuration)-Below 1 GHz / REC mode (PoE)

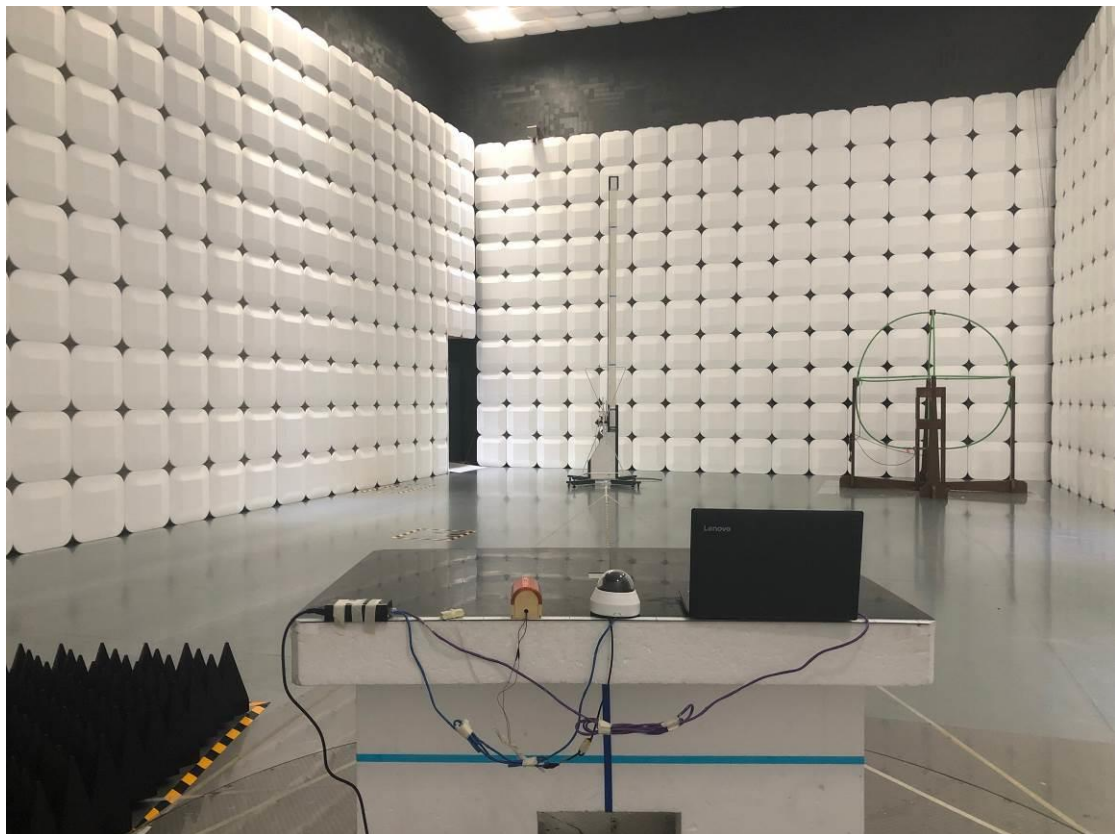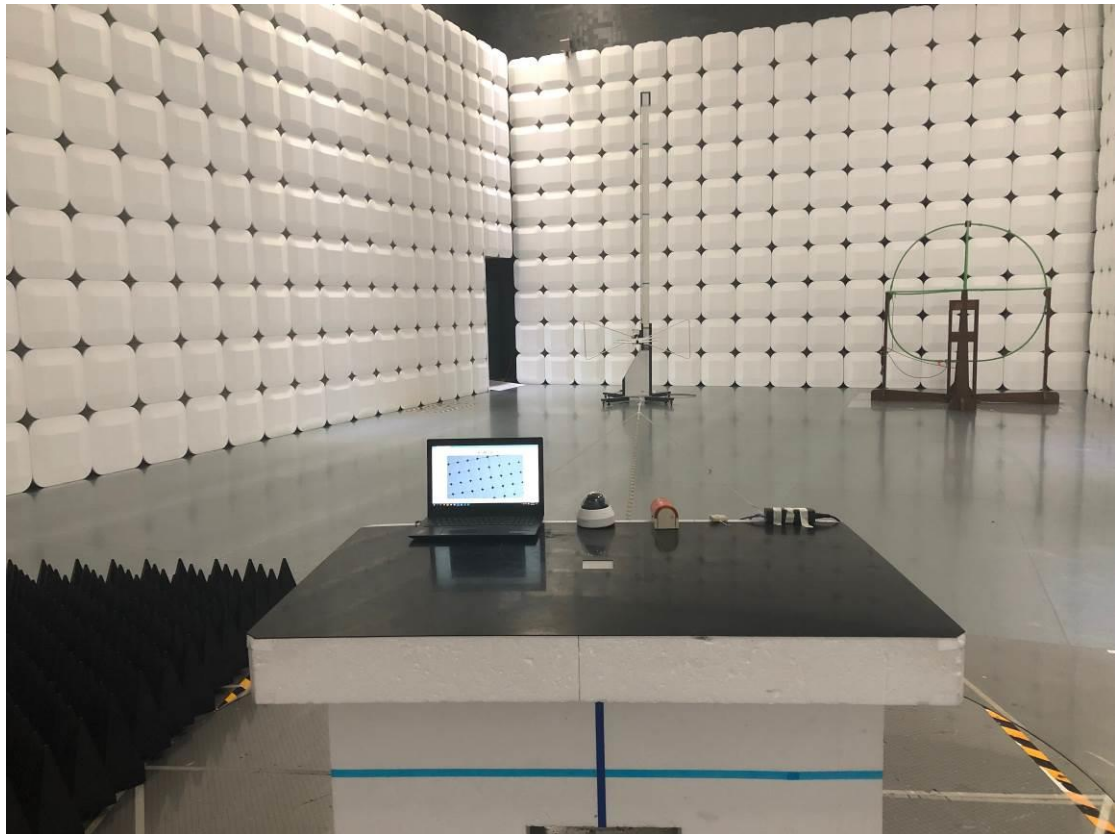

Radiated emission (Maximum emission configuration)-Above 1 GHz / REC mode (DC)

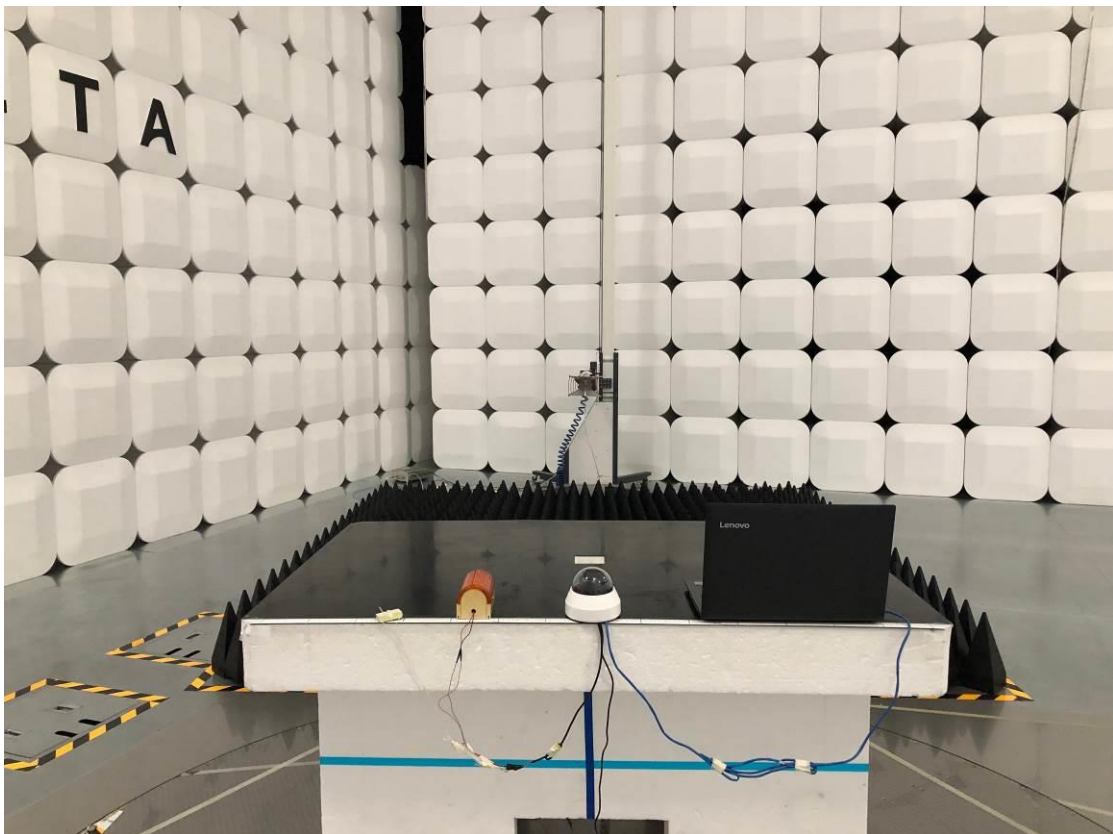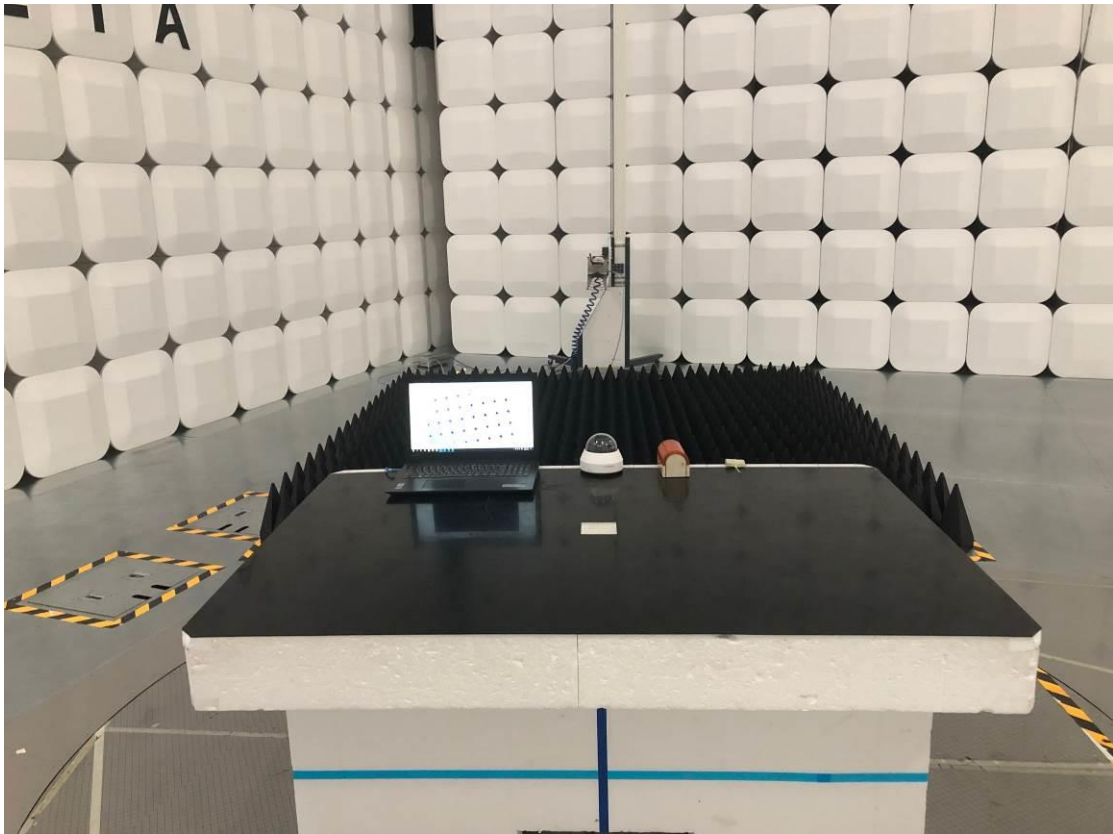

Radiated emission (Maximum emission configuration)-Above 1 GHz / REC mode (PoE)

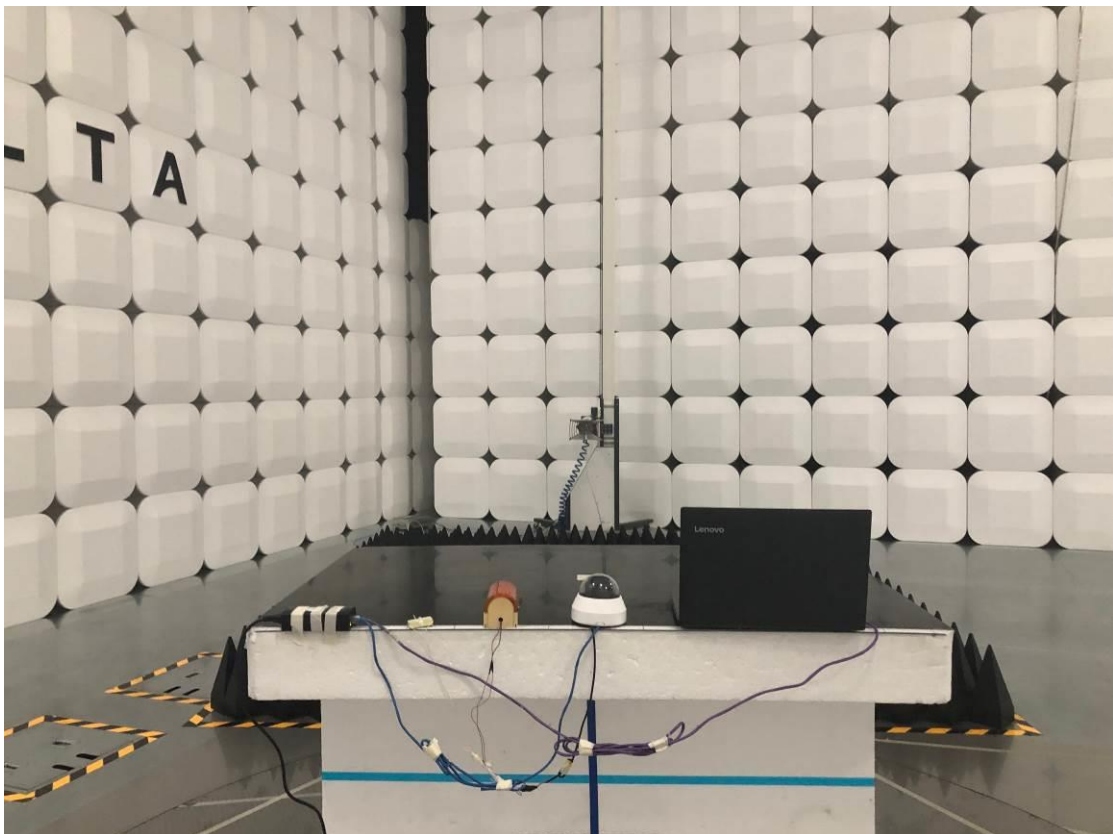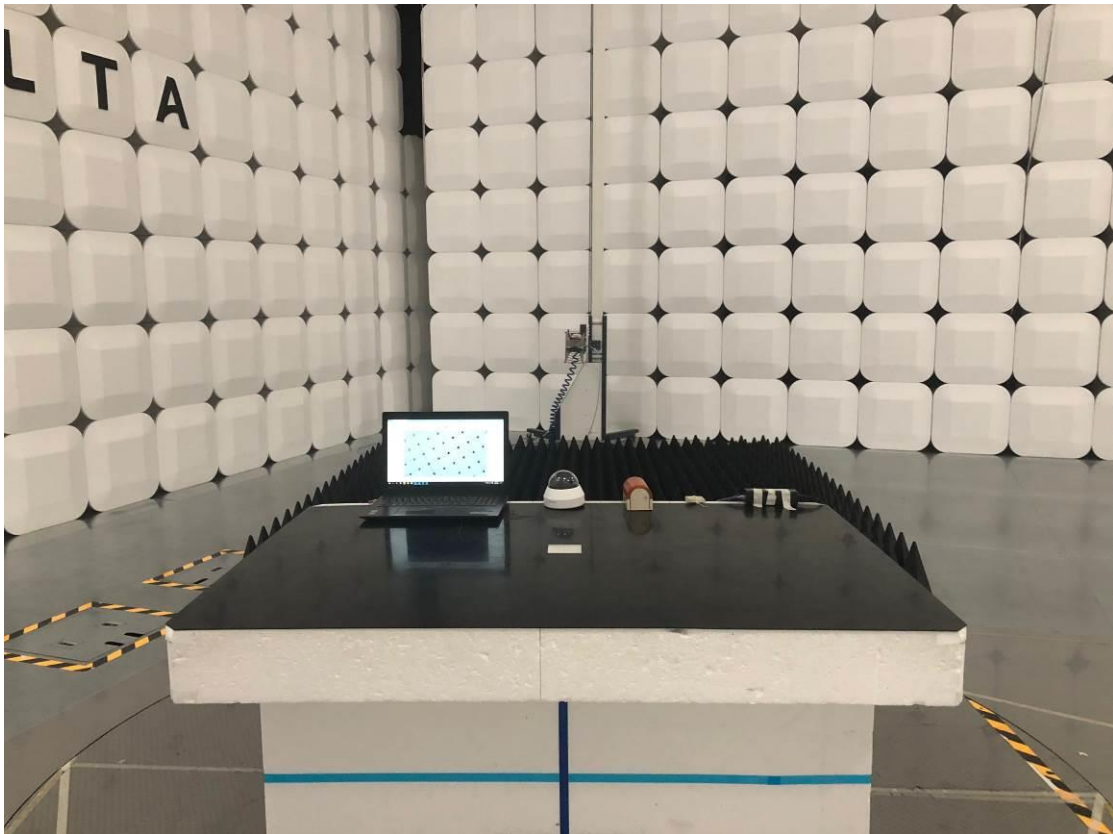

EUT



EUT

